

Technical Data Sheet

# Schulamid 6 GB 30 LS

Polyamide 6  
LyondellBasell Industries  
Engineering Plastics

## Product Description

30% glass beads reinforced Polyamide 6 with higher stiffness and dimension stability and UV-stabilizer

## General

|                        |                                    |
|------------------------|------------------------------------|
| Filler / Reinforcement | • Glass Bead, 30% Filler by Weight |
| Processing Method      | • Injection Molding                |
| Resin ID (ISO 1043)    | • PAM 6 GB 30                      |

| Physical                                  | Nominal Value (English) | Nominal Value (SI)     | Test Method |
|---|-------------------------|------------------------|-------------|
| Density                                   | 1.35 g/cm <sup>3</sup>  | 1.35 g/cm <sup>3</sup> | ISO 1183/A  |
| Viscosity Number (H2so4 (sulphuric Acid)) | 140 cm <sup>3</sup> /g  | 140 cm <sup>3</sup> /g | ISO 307     |

| Mechanical                    | Nominal Value (English) | Nominal Value (SI) | Test Method    |
|-------------------------------|-------------------------|--------------------|----------------|
| Tensile Modulus               | 595000 psi              | 4100 MPa           | ISO 527-1/1A/1 |
| Tensile Stress (Break)        | 8990 psi                | 62.0 MPa           | ISO 527-2/1A/5 |
| Tensile Strain (Break)        | 4.5 %                   | 4.5 %              | ISO 527-2/1A/5 |
| Flexural Modulus <sup>1</sup> | 508000 psi              | 3500 MPa           | ISO 178        |
| Flexural Stress <sup>1</sup>  |                         |                    | ISO 178        |
| 6.0% Strain                   | 15200 psi               | 105 MPa            |                |
| 3.5% Strain                   | 13500 psi               | 93.0 MPa           |                |

| Impact                           | Nominal Value (English)   | Nominal Value (SI)    | Test Method |
|----------------------------------|---------------------------|-----------------------|-------------|
| Charpy Notched Impact Strength   |                           |                       | ISO 179/1eA |
| -22°F (-30°C)                    | 1.4 ft·lb/in <sup>2</sup> | 3.0 kJ/m <sup>2</sup> |             |
| 73°F (23°C)                      | 1.9 ft·lb/in <sup>2</sup> | 4.0 kJ/m <sup>2</sup> |             |
| Charpy Unnotched Impact Strength |                           |                       | ISO 179/1eU |
| -22°F (-30°C)                    | 13 ft·lb/in <sup>2</sup>  | 28 kJ/m <sup>2</sup>  |             |
| 73°F (23°C)                      | 19 ft·lb/in <sup>2</sup>  | 40 kJ/m <sup>2</sup>  |             |

| Hardness                             | Nominal Value (English) | Nominal Value (SI) | Test Method |
|--------------------------------------|-------------------------|--------------------|-------------|
| Ball Indentation Hardness (H 961/30) | 27100 psi               | 187 MPa            | ISO 2039-1  |

| Thermal                           | Nominal Value (English) | Nominal Value (SI) | Test Method |
|-----------------------------------|-------------------------|--------------------|-------------|
| Deflection Temperature Under Load |                         |                    |             |
| 66 Psi (0.45 Mpa), Unannealed     | 358 °F                  | 181 °C             | ISO 75-2/Bf |
| 264 Psi (1.8 Mpa), Unannealed     | 149 °F                  | 65.0 °C            | ISO 75-2/Af |
| Vicat Softening Temperature       | 387 °F                  | 197 °C             | ISO 306/B50 |

| Flammability        | Nominal Value (English) | Nominal Value (SI) | Test Method |
|---------------------|-------------------------|--------------------|-------------|
| Burning Rate        |                         |                    |             |
| 0.0787 In (2.00 Mm) | < 3.9 in/min            | < 100 mm/min       | ISO 3795    |
| 0.0787 In (2.00 Mm) | < 3.9 in/min            | < 100 mm/min       | FMVSS 302   |


## Additional Information

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications

Technical Data Sheet

# Schulamid 6 GB 30 LS

Polyamide 6  
LyondellBasell Industries  
Engineering Plastics

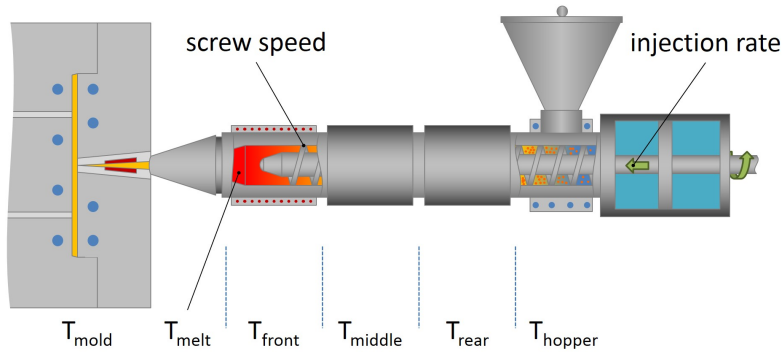

| Injection              | Nominal Value (English) | Nominal Value (SI) |
|------------------------|-------------------------|--------------------|
| Drying Temperature     | 176 °F                  | 80 °C              |
| Drying Time            | 3.0 to 4.0 hr           | 3.0 to 4.0 hr      |
| Suggested Max Moisture | 0.04 to 0.10 %          | 0.04 to 0.10 %     |
| Processing (Melt) Temp | 482 to 536 °F           | 250 to 280 °C      |
| Mold Temperature       | 140 to 212 °F           | 60 to 100 °C       |

**Notes**

<sup>1</sup> 0.079 in/min (2.0 mm/min)

**Notes**

These are typical property values not to be construed as specification limits.