

Technical Data Sheet

# Schulamid 66 GF 30 H

Polyamide 66  
LyondellBasell Industries  
Engineering Plastics

## Product Description

30% glass fiber reinforced, heat stabilized Polyamide 66

## General

Filler / Reinforcement	• Glass Fiber, 30% Filler by Weight
Features	• Balanced Stiffness/Toughness • Heat Aging Resistant • Medium Viscosity • Oil Resistant
Automotive Specifications	• FORD WSK-M4D642-A • GM GMP.PA66.040 Color: Black • GM QK 003013 H Color: 968001 Black • IMDS ID 13604017 Color: 968001 Black
UL File Number	• E86615
Processing Method	• Injection Molding

Physical	Dry	Conditioned	Unit	Test Method
Density	1.36	--	g/cm <sup>3</sup>	ISO 1183/A
Water Absorption				ISO 62
Equilibrium, 73°F (23°C), 50% Rh	1.7	--	%	
Viscosity Number	145	--	cm <sup>3</sup> /g	ISO 307
Mechanical	Dry	Conditioned	Unit	Test Method
Tensile Modulus	1.45E+6 (10000)	899000 (6200)	psi (MPa)	ISO 527-1/1A/1
Tensile Stress (Break)	25400 (175)	16000 (110)	psi (MPa)	ISO 527-2/1A/5
Tensile Strain (Break)	3.0	7.0	%	ISO 527-2/1A/5
Impact	Dry	Conditioned	Unit	Test Method
Charpy Notched Impact Strength				ISO 179/1eA
-22°F (-30°C)	3.3 (7.0)	--	ft·lb/in <sup>2</sup> (kJ/m <sup>2</sup> )	
73°F (23°C)	4.8 (10)	8.6 (18)	ft·lb/in <sup>2</sup> (kJ/m <sup>2</sup> )	
Charpy Unnotched Impact Strength				ISO 179/1eU
-22°F (-30°C)	29 (60)	--	ft·lb/in <sup>2</sup> (kJ/m <sup>2</sup> )	
73°F (23°C)	38 (80)	45 (95)	ft·lb/in <sup>2</sup> (kJ/m <sup>2</sup> )	
Thermal	Dry	Conditioned	Unit	Test Method
Deflection Temperature Under Load				
66 Psi (0.45 Mpa), Unannealed	> 482 (> 250)	--	°F (°C)	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	473 (245)	--	°F (°C)	ISO 75-2/Af
Vicat Softening Temperature	> 482 (> 250)	--	°F (°C)	ISO 306/B50 ISO 306/A50

Technical Data Sheet

# Schulamid 66 GF 30 H

Polyamide 66  
LyondellBasell Industries  
Engineering Plastics

Thermal	Dry	Conditioned	Unit	Test Method
RTI Elec				UL 746B
0.030 In (0.75 Mm)	248 (120)	--	°F (°C)	
0.06 In (1.5 Mm)	248 (120)	--	°F (°C)	
0.12 In (3.0 Mm)	248 (120)	--	°F (°C)	
RTI Imp				UL 746B
0.030 In (0.75 Mm)	212 (100)	--	°F (°C)	
0.06 In (1.5 Mm)	221 (105)	--	°F (°C)	
0.12 In (3.0 Mm)	239 (115)	--	°F (°C)	
RTI Str				UL 746B
0.030 In (0.75 Mm)	230 (110)	--	°F (°C)	
0.06 In (1.5 Mm)	248 (120)	--	°F (°C)	
0.12 In (3.0 Mm)	266 (130)	--	°F (°C)	
Electrical	Dry	Conditioned	Unit	Test Method
Surface Resistivity	> 1.0E+15	> 1.0E+12	ohms	IEC 60093
Volume Resistivity	> 1.0E+13	> 1.0E+10	ohms·m	IEC 62631-3-1
Comparative Tracking Index	450	--	V	IEC 60112
Flammability	Dry	Conditioned	Unit	Test Method
Burning Rate				
0.0787 In (2.00 Mm)	1.2 (30)	--	in/min (mm/min)	ISO 3795
0.0787 In (2.00 Mm)	1.2 (30)	--	in/min (mm/min)	FMVSS 302
Flammability Classification				IEC 60695-11-10, -20
0.030 In (0.75 Mm)	HB	--		
0.06 In (1.5 Mm)	HB	--		
0.12 In (3.0 Mm)	HB	--		
Glow Wire Flammability Index				IEC 60695-2-12
0.06 In (1.5 Mm)	1200 (650)	--	°F (°C)	
0.12 In (3.0 Mm)	1200 (650)	--	°F (°C)	


### Additional Information

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications

Technical Data Sheet

# Schulamid 66 GF 30 H

Polyamide 66  
LyondellBasell Industries  
Engineering Plastics

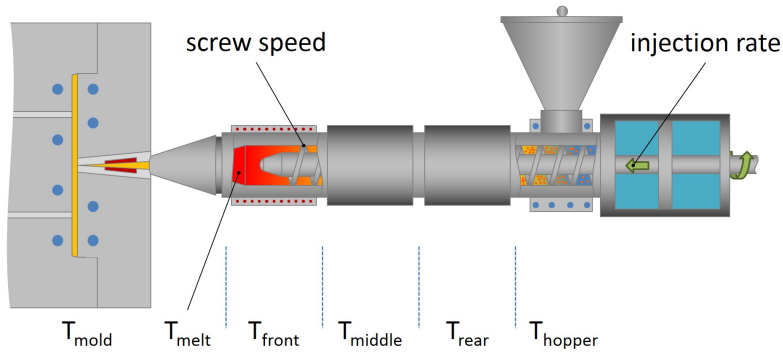

Injection	Dry (English)	Dry (SI)
Drying Temperature	176 °F	80 °C
Drying Time	3.0 to 4.0 hr	3.0 to 4.0 hr
Suggested Max Moisture	0.04 to 0.10 %	0.04 to 0.10 %
Processing (Melt) Temp	536 to 572 °F	280 to 300 °C
Mold Temperature	140 to 248 °F	60 to 120 °C

### Notes

These are typical property values not to be construed as specification limits.