

Technical Data Sheet

Schulamid XT 200 GF 30

Polyamide 66
LyondellBasell Industries
Engineering Plastics

Product Description

30% glass fiber reinforced Polyamide 66 for high temperature applications, electrically neutral

General

Filler / Reinforcement	• Glass Fiber, 30% Filler by Weight
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.38 g/cm ³	1.38 g/cm ³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (275°C/5.0 Kg)	10 cm ³ /10min	10 cm ³ /10min	ISO 1133
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	1.45E+6 psi	10000 MPa	ISO 527-1/1
Tensile Stress (Break)	27600 psi	190 MPa	ISO 527-2/5
Tensile Strain (Break)	3.0 %	3.0 %	ISO 527-2/5
Flexural Modulus	1.51E+6 psi	10400 MPa	ISO 178
Flexural Stress ¹ (3.5% Strain)	41300 psi	285 MPa	ISO 178
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			
-22°F (-30°C)	3.8 ft·lb/in ²	8.0 kJ/m ²	ISO 179/1eC
73°F (23°C)	4.8 ft·lb/in ²	10 kJ/m ²	ISO 179/1eA
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	26 ft·lb/in ²	55 kJ/m ²	
73°F (23°C)	36 ft·lb/in ²	75 kJ/m ²	
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Ball Indentation Hardness (H 961/30)	38400 psi	265 MPa	ISO 2039-1
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	430 °F	221 °C	ISO 75-2/B
264 Psi (1.8 Mpa), Unannealed	396 °F	202 °C	ISO 75-2/A
Vicat Softening Temperature			
--	405 °F	207 °C	ISO 306/B50
--	455 °F	235 °C	ISO 306/A50
Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm)	< 3.9 in/min	< 100 mm/min	ISO 3795
0.0787 In (2.00 Mm)	< 3.9 in/min	< 100 mm/min	FMVSS 302
Flammability Classification			IEC 60695-11-10, -20
0.06 In (1.5 Mm)	HB	HB	
0.12 In (3.0 Mm)	HB	HB	


Additional Information

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications

Technical Data Sheet

Schulamid XT 200 GF 30

Polyamide 66
LyondellBasell Industries
Engineering Plastics

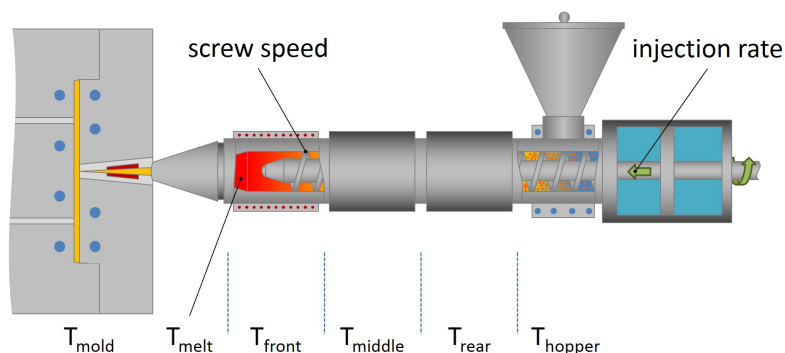

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	3.0 to 4.0 hr	3.0 to 4.0 hr
Suggested Max Moisture	0.04 to 0.10 %	0.04 to 0.10 %
Processing (Melt) Temp	518 to 554 °F	270 to 290 °C
Mold Temperature	176 to 248 °F	80 to 120 °C

Notes

¹ 0.079 in/min (2.0 mm/min)

Notes

These are typical property values not to be construed as specification limits.