

Technical Data Sheet  
**DuraGrip® DGX 7390**  
Thermoplastic Elastomer  
Engineering Plastics



**Product Description**

DuraGrip® DGX 7390 is designed for overmolding onto a wide variety of thermoplastic substrates including ABS, PC, Nylon 6, Nylon 6/6, glass filled Nylon, ASA, and alloys. It is easy to use in injection molding and extrusion processes. DGX 7390 is designed for optimum UV stability and has excellent elastomeric properties. Duragrip bonding grades are hygroscopic and drying is recommended for best results (160F for 3 hours)

**General**

|                   |                 |                     |                 |
|-------------------|-----------------|---------------------|-----------------|
| Features          | • Good Adhesion | • Good Colorability | • UV Stabilized |
| Forms             | • Pellets       |                     |                 |
| Processing Method | • Extrusion     | • Injection Molding |                 |


| Physical                                 | Nominal Value (English) | Nominal Value (SI) | Test Method |
|------------------------------------------|-------------------------|--------------------|-------------|
| Density / Specific Gravity               | 1.08                    | 1.08 g/cm³         | ASTM D792   |
| Melt Mass-Flow Rate (MFR) (190°C/8.7 kg) | 5.0 g/10 min            | 5.0 g/10 min       | ASTM D1238  |

| Elastomers                               | Nominal Value (English) | Nominal Value (SI) | Test Method |
|------------------------------------------|-------------------------|--------------------|-------------|
| Tensile Stress                           |                         |                    | ASTM D412   |
| 100% Strain                              | 435 psi                 | 3.00 MPa           |             |
| 300% Strain                              | 660 psi                 | 4.55 MPa           |             |
| Tensile Strength (Yield, 73°F (23°C))    | 675 psi                 | 4.65 MPa           | ASTM D412   |
| Tensile Elongation (Break)               | 350 %                   | 350 %              | ASTM D412   |
| Tear Strength <sup>1</sup> (75°F (24°C)) | 176 lbf/in              | 30.8 kN/m          | ASTM D624   |

| Hardness                             | Nominal Value (English) | Nominal Value (SI) | Test Method |
|--------------------------------------|-------------------------|--------------------|-------------|
| Durometer Hardness (Shore A, 10 sec) | 55                      | 55                 | ASTM D2240  |

| Fill Analysis                                          | Nominal Value (English) | Nominal Value (SI) | Test Method |
|--------------------------------------------------------|-------------------------|--------------------|-------------|
| Melt Viscosity (374°F (190°C), 300 sec <sup>-1</sup> ) | 526 Pa·s                | 526 Pa·s           | ASTM D3835  |

Technical Data Sheet  
**DuraGrip® DGX 7390**  
Thermoplastic Elastomer  
Engineering Plastics

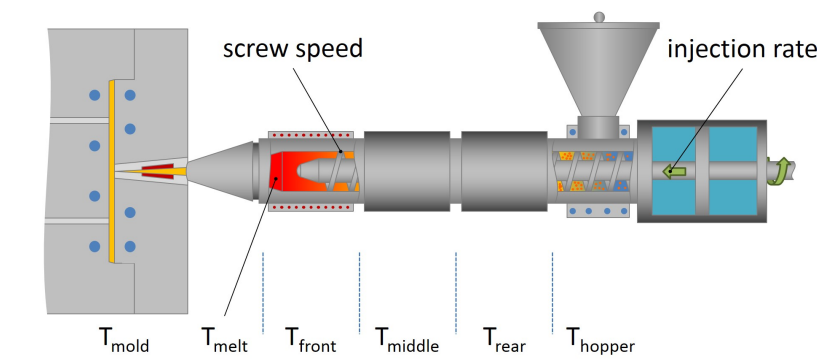

| Injection          | Nominal Value (English) | Nominal Value (SI) |
|--------------------|-------------------------|--------------------|
| Drying Temperature | 160 °F                  | 71 °C              |
| Drying Time        | 3.0 hr                  | 3.0 hr             |

Notes  
<sup>1</sup> Die C

Notes  
These are typical property values not to be construed as specification limits.