


# DuPont™ Tefzel® 750

fluoropolymer resin

## 200°C (392°F) Appliance Wire Insulation

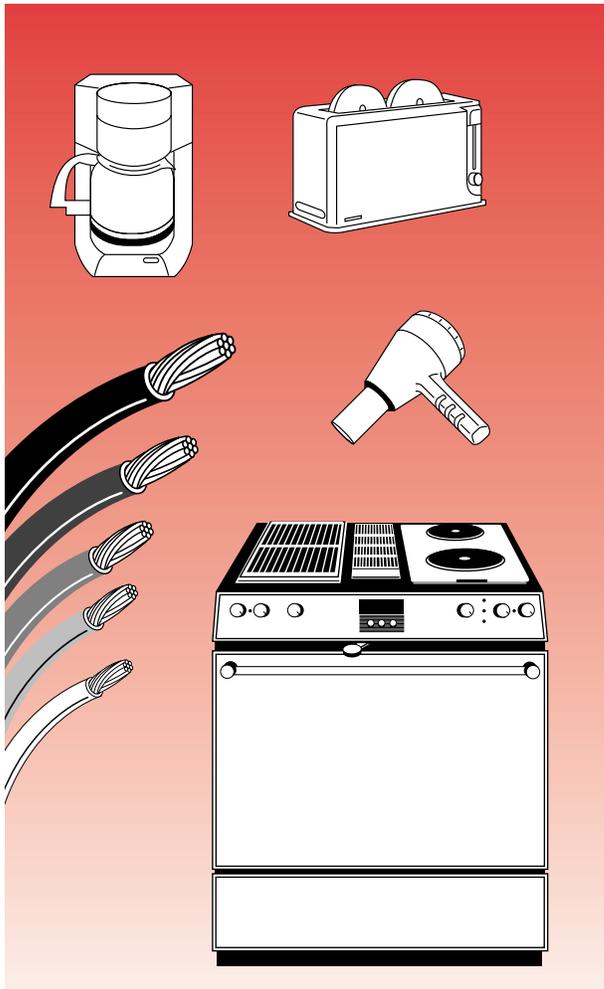

DuPont™ *Tefzel*® fluoropolymer resin, a close relative of DuPont™ *Teflon*® fluoropolymer resin, was introduced in 1972. It has been used to insulate many millions of feet of cable for aircraft and other aerospace vehicles, rapid transit cars, computers, automobiles, factories, heating piping systems, and nuclear power plants. Now a special grade of *Tefzel*® resin is available to provide this proven performance for 200°C (392°F) appliance wire.

### UL and CSA Ratings

UL Subject 758 and CSA 210 rated at 200°C (392°F):

- UL Style 10109 for 300V
- UL Style 10086 for 600V

Styles 10109 and 10086 are UL-approved for bare copper conductors at 200°C (392°F) as long as the individual strand diameter is 15 mil and larger.

### Advantages of DuPont™ *Tefzel*® 750

- Easily stripped and terminated.
- Unlike SF2 and SF1, it is so tough it doesn't need a protective glass braid. Eliminating the glass braid means:
  - no irritating glass fibers
  - no glass strands to make terminations unreliable
  - less stripping die wear
  - no braid to damage, thus spoiling wire
  - no lacquers to smoke, crack, or turn brown with heat aging.
- Superior fire resistance, thermal stability, and resistance to aging.
- Colorable, printable, and strippable.
- A pure polymer, not a compound with inconsistent composition and performance.



## Cost-Effectiveness

- Single thin-wall extrusion, 40% smaller OD than SF2.
- Compatible with bare copper conductor per UL requirement, expensive plated conductor not required.

## DuPont™ Tefzel® 750 vs. Other Grades of DuPont™ Tefzel®

- Tefzel® 750 has 200°C (392°F) thermal rating for appliance wire, while all other grades are lower.
- Tefzel® 750 is more flexible than the other grades; for example, flexural modulus for Tefzel® 750 is 641.1 MPa (93,000 psi) vs. 1,171.9 MPa (170,000 psi) for Tefzel® 200.

## Performance Test Results

Cold bend test (4 hr at -35°C [-31°F])	No cracks
Flexibility after all oven aging	No cracks
Conductor corrosion after all oven aging	None
Impact (15 mil)	2 ft lb
Insulation resistance (UL-62)	43,000 ohm·10 <sup>6</sup>
Horizontal flame test (UL-62)	Complies
Vertical flame test (UL-62)	Complies

## Other Properties of DuPont™ Tefzel® 750

Flexural modulus (ASTM D790)	641.1 MPa (93,000 psi)
Specific gravity (ASTM D792)	1.75–1.79
MIT flex life	120,000

Temperature	Tensile Strength (ASTM D1708)	Elongation
23°C (73°F)	37.9 MPa (5,500 psi)	300%
140°C (284°F)	11.4 MPa (1,650 psi)	600%
160°C (320°F)	8.6 MPa (1,250 psi)	650%
180°C (356°F)	6.2 MPa (900 psi)	600%
200°C (392°F)	3.4 MPa (500 psi)	600%

## Wire Harness Manufacturing Tips


- *Stripping.* Use automated or manual machines with stripping die blades or with radial V-blades.
- *Termination.* AMP Inc. has designed Faston\* terminals sized especially for Tefzel® 750. Part numbers:
  - 61375-1 tin-plated brass (cold side)
  - 63688-1 nickel-plated steel (hot side)
 Terminals designed for silicone-coated wire can also be used.
- *Hot stamp printing.* Use printing foils designed for Tefzel® resin, such as Kingsley Machine Inc. K-520 foil. Use temperatures between 163°C (325°F) and 204°C (400°F) with moderate dwell and pressure.
- *Inks.* Use inks recommended specifically for Tefzel® resin. These are obtainable from many sources, including:
 

Gem Gravure	Formulabs
Colorant AB	Standard T Chemical
American Can Co.	
- *Packaging.* To prevent wire-curl and its associated handling problems, request put-ups in drums or spools with large diameter barrels (cores).




\*Registered trademark of AMP Inc.

**DuPont™ Tefzel® 750**  
**UL Thermal Studies—Style 10086**  
**Exposure Temperature, 210° (410°F)**

**Tensile Strength,  $T_B$**

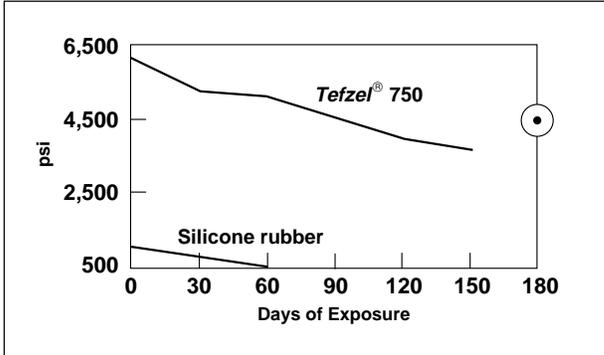


**Elongation,  $E_B$**

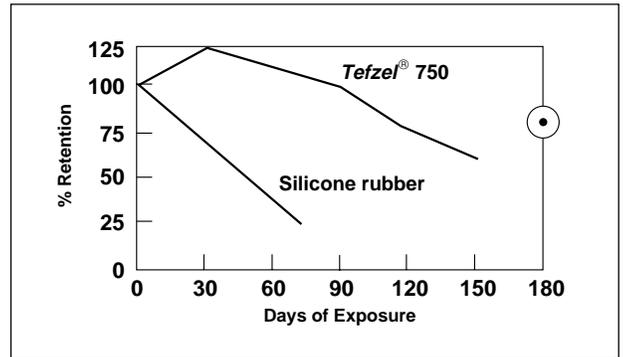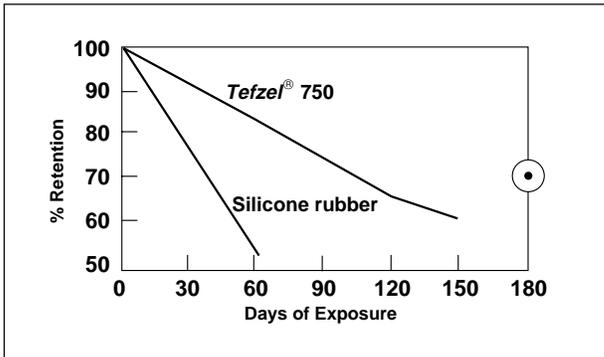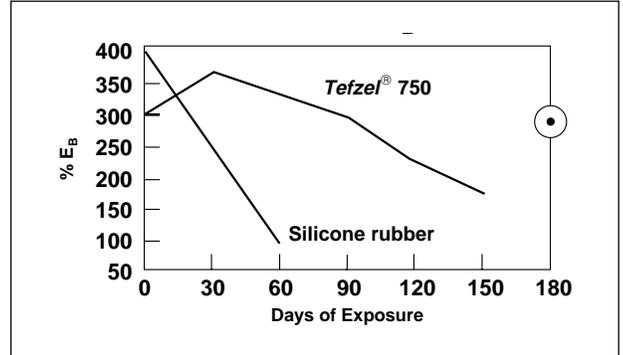




Silicone rubber—literature value  
 180-day data—DuPont tests

**DuPont™ Tefzel® 750**  
**UL Thermal Studies—Style 10086**  
**Exposure Temperature, 232° (450°F), 7 Days**

**Tensile Strength, T<sub>B</sub>**

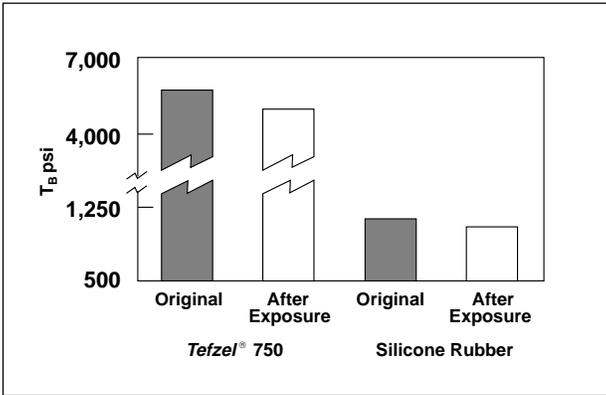


**Elongation, E<sub>B</sub>**

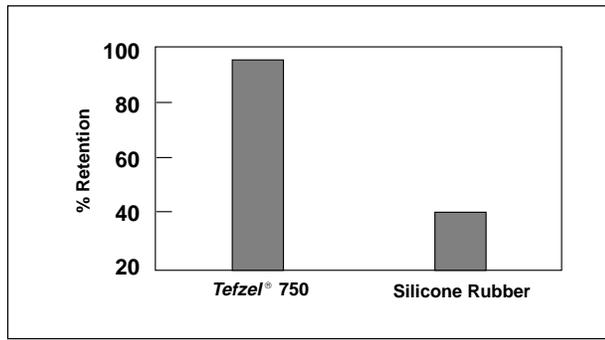
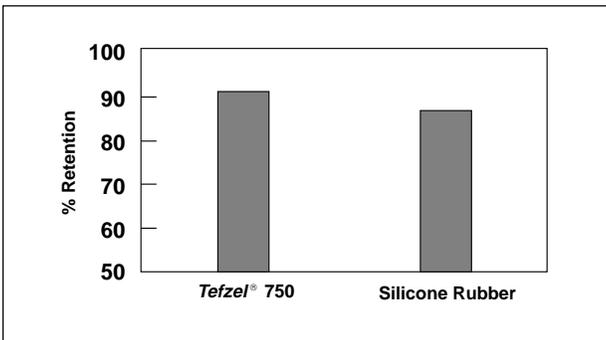
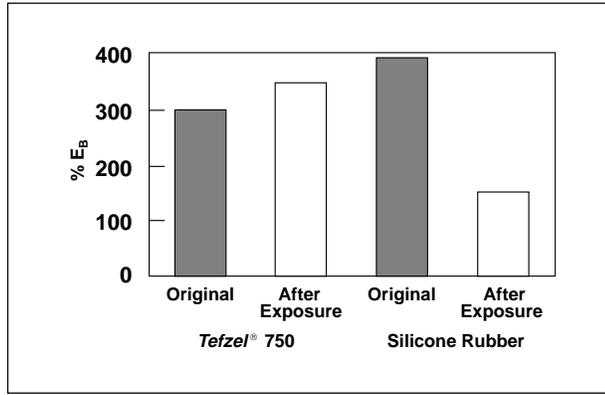


**DuPont™ Tefzel® 750**  
**UL Thermal Studies—Style 10086**  
**Dielectric Strength**

**Exposure Temperature, 210°C (410°F)**

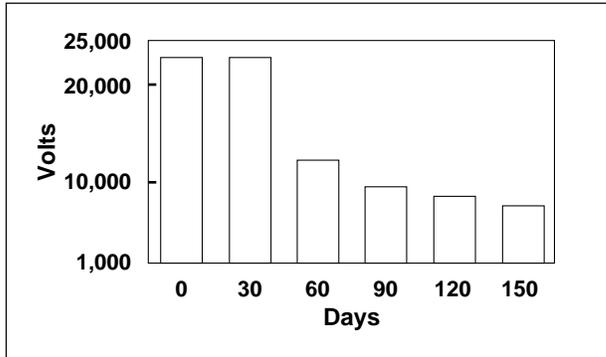

**Exposure Temperature, 232°C (450°F)**

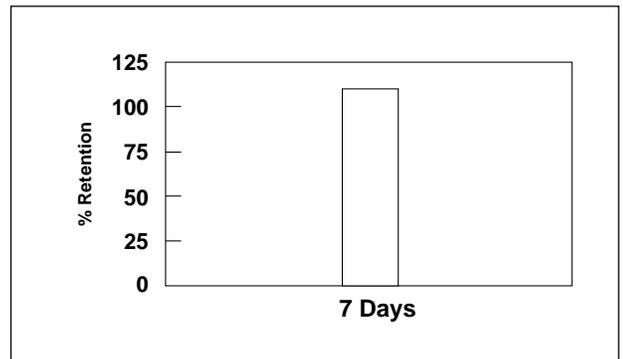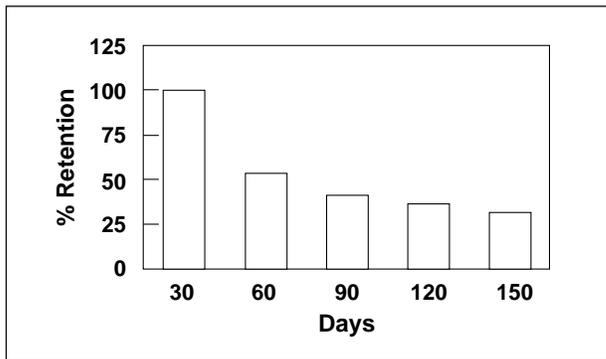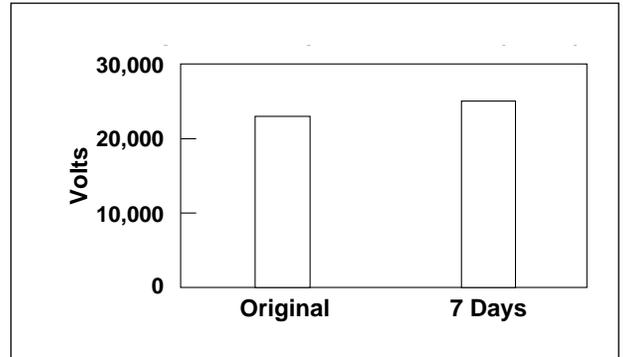

**Table 1**  
**Test Results for 18 Gauge Appliance Wire Construction with Various Insulation**

Wire	Voltage	Nominal Insulation Thk., mm (mil)	Deformation, % 232°C (450°F), 1 hr, 1 kg Load UL-1581 <sup>a</sup>	Crush, lb UL-44	Abrasion, Cycles 1 kg Load, 0.026" Needle GE Scrape Abrader	Linear Coefficient of Expansion <sup>b</sup> cc/sec/°C
UL-10086 (TFZ 750)	600	0.254 (10)	95	1,172	3,625	—
PVC	600	0.813 (32)	—	775	2,160	—
XLPE 125°C (257°F)	600	0.813 (32)	—	886	2,070	11.5 x 10 <sup>-4</sup>
XLPE 150°C (302°F)	600	0.813 (32)	—	810	1,925	—
SF2	600	0.813 (32) + glass braid	98	1,248	85 <sup>c</sup>	8.6 x 10 <sup>-4</sup>
UL-1330 (FEP)	600	0.533 (21)	98	1,926	3,290	—
UL-1332 (FEP)	300	0.330 (13)	97	973	2,670	—
UL-10109 (TFZ 750)	300	0.152 (6)	98	993	2,960	13–14 x 10 <sup>-5</sup>

<sup>a</sup> UL-1581 requires 500 g load

<sup>b</sup> Published data

<sup>c</sup> Braid removed

**For more information on Fluoroproducts:**

**(302) 479-7731**

DuPont Fluoroproducts  
P.O. Box 80713  
Wilmington, DE 19880-0713  
[www.teflon.com](http://www.teflon.com)

<b>Europe</b>	<b>Japan</b>	<b>Asia Pacific</b>	<b>Canada</b>	<b>South America</b>
DuPont de Nemours Int'l SA DuPont Fluoroproducts 2, chemin du Pavillon P.O. Box 50 CH-1218 Le Grand-Saconnex Geneva, Switzerland (022) 7175111	DuPont Mitsui Fluorochemicals Co., Ltd. Chiyoda Honsha Building 5-18, Sarugaku-cho 1-chome Chiyoda-ku, Tokyo 101 Japan 81-3-5281-5872	DuPont China, Limited 26/F., Tower 6, The Gateway 9 Canton Road, Tsimshatsui Kowloon, Hong Kong (852) 27341948 Tim-S.T.Leung@hkg.dupont.com	DuPont Canada, Inc. DuPont Fluoroproducts P.O. Box 2200, Streetsville 7070 Mississauga Road Mississauga, Ontario, Canada L5M 2H3 (905) 821-5194	DuPont do Brasil S/A Fluoropolymers Alameda Itapecuru, 506 06454-080 - Alphaville P.O. Box 263 Barueri, Sao Paulo, Brazil 0800-171715 Produtos.Brazil@bra.dupont.com

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Because conditions of product use are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any material, evaluation of any compound under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents.

**CAUTION:** Do not use in medical applications involving permanent implantation in the human body. For other medical applications, see "DuPont Medical Caution Statement," H-50102.



*The miracles of science*<sup>®</sup>