

DuPont™ Delrin® Renewable Attributed RA511CPE

Delrin® RA511CPE base polymer is produced using 100% bio-feedstock from waste, accredited through the International Sustainability and Carbon Certification (ISCC) mass balance certification system. It delivers state-of-the-art low VOC technology and top-class mechanical properties with reduced lifecycle greenhouse gas emissions and lower fossil resource use.



Delrin® used in e-bikes

Product overview

DuPont is excited to announce Delrin® Renewable Attributed (RA) 511CPE, a nucleated medium viscosity, low emission acetal homopolymer grade produced from certified sustainable sources.

Delrin® RA511CPE supports our customers' sustainability goals with:

- base polymer produced from 100% certified bio-feedstock from waste (ISCC mass balance)
- bio-feedstock from second-generation sources, not in competition with the food and feed chain
- 100% certified renewable electricity used for production
- lower product cradle-to-gate carbon footprint
- reduction of non-renewable fossil resource usage
- low VOC (below 2 ppm in VDA 275)


Delrin® RA511CPE offers the same superior performance and quality our customers expect from our Delrin® 511CPE, with an improved environmental impact profile*.

* Sustainability assessment conducted using a cradle-to-gate Life Cycle Assessment (LCA) in accordance with ISO 14040/14044 methodology.

Properties **	Unit	Test method	Delrin® 511CPE	Delrin® RA511CPE
Melt mass-flow rate (MFR 190°C, 2.16kg)	g/10min	ISO 1133		14
Mold shrinkage (Parallel / Normal)	%	ISO 294-4		1.8 / 1.8
Density	g/cm ³	ISO 1183		1.42
Melting temperature, 10°C/min	°C	ISO 11357-1/-3		178
Notched Charpy at 23°C	kJ/m ²	ISO 179/1eA		7
Notched Charpy at -30°C	kJ/m ²	ISO 179/1eA		6.5
Tensile strength at yield	MPa	ISO 527-1/-2		77
Yield strain	%	ISO 527-1/-2		13
Nominal strain at break	%	ISO 527-1/-2		25
Tensile modulus	MPa	ISO 527-1/-2		3400
Flexural modulus	MPa	ISO 178		3200

** Information in this table is based on technical data that DuPont believes to be reliable and represents typical values that relate only to the specific material designated. This information may be subject to revision as new knowledge and experience becomes available.

Source: DuPont

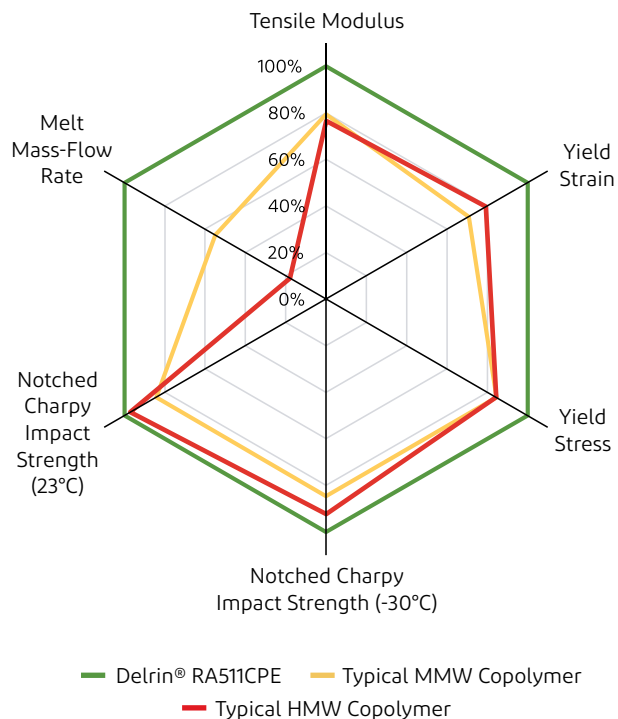

Source: DuPont

High performance

DuPont™ Delrin® Renewable Attributed RA511CPE outperforms both medium and high molecular weight (MW) acetal copolymers, enabling sustainable design.

Certified sustainability

Delrin® RA511CPE base polymer is produced using 100% bio-feedstock from waste, in accordance with mass balance principles. A mass balance approach and chain of custody utilizes separate bookkeeping from cradle to gate (feedstock to finished product) and enables supply chain traceability. DuPont's Delrin® Renewable Attributed manufacturing site and supply chain are accredited through the globally-recognized International Sustainability and Carbon Certification (ISCC) certification system.

Enable sustainable design

Delrin® RA511CPE delivers superior performance compared to competitive medium MW copolymers, as well as competitive high MW copolymers. With higher tensile properties (+20%) and increased impact resistance (+15%) achieved on a significantly better flow, Delrin® RA511CPE permits the design of parts with thinner walls while maintaining full functionality.

Designing lighter parts with Delrin® RA511CPE saves energy, resources, and money.


Optimize your resource efficiency

The use of reground Delrin® has almost no influence on mechanical properties and molding performance. Five passes with 100% reground material are possible without any negative effect on mechanical properties. Using Delrin® helps increase your internal recycling rate and achieves substantial environmental and financial savings.

Reliable parts, made to last

In addition to the ability to make durable parts at possibly higher production rates, when you work with DuPont you can count on consistent quality and supply stability. Plus, our design, technical, and processing support helps you produce high-quality parts that deliver on their promise.

By optimizing part design, Delrin® Renewable Attributed enables environmental and cost savings compared to medium MW copolymer alternatives.

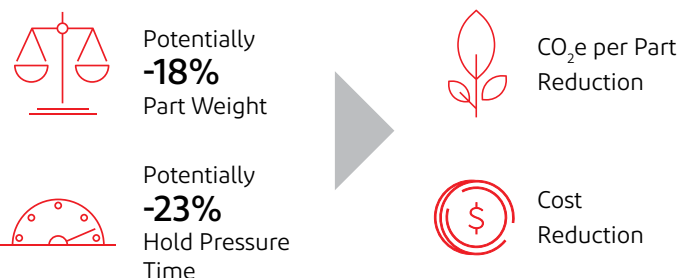

Visit us at delrin.dupont.com

dupont.com

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2021 DuPont. The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.



Mobility and Materials