

# Queo™ 0201

## Octene-1 Plastomer

## DATA SHEET

### Description and Attributes

Queo™ 0201 is an ethylene based octene plastomer produced in a solution polymerisation process using a metallocene catalyst.

Queo 0201 is a versatile blend partner for other polyolefins in film, extrusion and moulding applications, offering :

- Unrivalled sealing properties
- Outstanding toughness, puncture resistance and low temperature impact strength
- Excellent polyolefin compatibility
- Flexibility
- Excellent environmental stress cracking resistance
- Low amount of extractables
- High clarity

### Applications

Demonstrated applications include :

- Seal layers in lamination and flexible barrier films
- High strength flexible films
- Heat shrinkable display film
- Specialty stretch film applications
- PP film toughness modification
- Roof coverings
- Tunnel linings
- Flexible low voltage insulation
- Halogen free flame retardant compounds
- Blow moulded articles
- Soft foams

### Additives

Queo 0201 contains processing stabilizers.

General properties	Units	Typical values [1]	Method
Melt Flow Rate (2.16 kg/190°C)	dg/min	1.1	ISO 1133
Density (23°C)	kg/m <sup>3</sup>	902	ISO 1183
Shore D hardness	-	43	ISO 868
DSC peak melting point	°C	97	ISO 11357
Vicat softening temperature (at 10 N)	°C	82	ISO 306
Brittleness temperature	°C	< -76	ASTM D746


Film properties [2]			
Gloss		84	ASTM 2457 (45°)
Haze	%	2	ASTM D1003 (A)
Tensile modulus	MPa	65	ASTM D882
Seal initiation temperature	°C	78	ASTM F88
Puncture resistance energy	mJ/mm	2800	Internal method
Impact strength (blown film Monsanto dart)	g/μm	> 48	ASTM D1709-75

Moulded plaque properties [3]			
Tensile strength at break	MPa	36	ISO 527-2 (5A)
Elongation at break	%	715	ISO 527-2 (5A)
Flexural modulus	MPa	72	ISO 178
Notched Izod at 23°C	kJ/m <sup>2</sup>	No break	ISO 180 (1A)
Environmental stress crack resistance	hr	> 1000	ASTM D1693 (method B)

[1] Values are typical and not to be interpreted as specifications.

[2] Specifics of 40 μm blown film.

[3] Specifics of compression moulded test specimen.

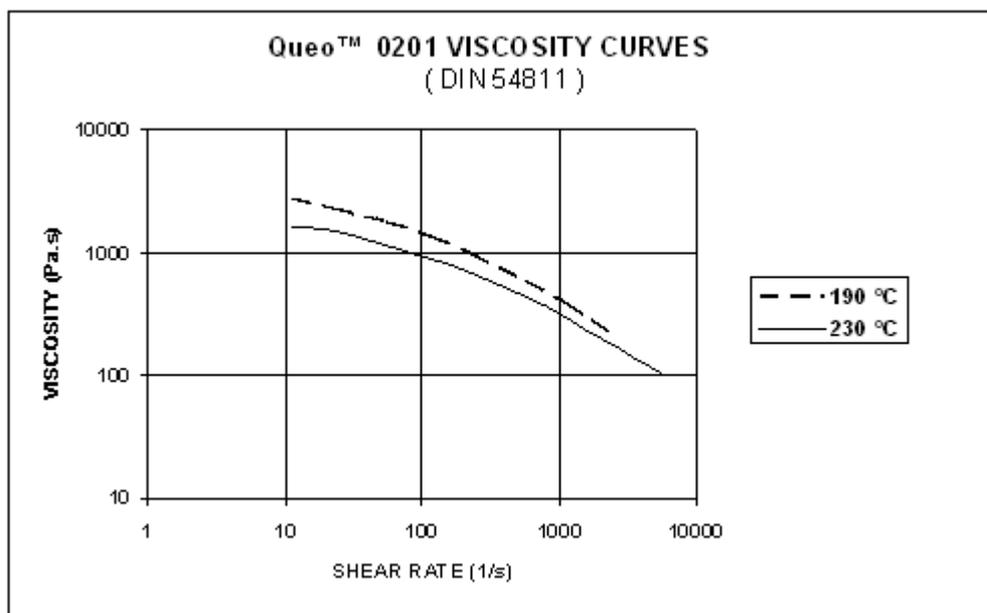

### **Food Law Compliance and Product Handling**

Queo 0201 can - in principle - be used in food contact applications in various EU Member States and in the USA (FDA). Migration or use limitations may apply. Please contact your sales representative for more detailed information and/or actual compliance certification documents.

Specific information on material safety aspects of Queo 0201 will be provided upon request.

### **Further information**

Borealis AG  
Wagramerstrasse 17-19  
1220 Vienna  
Austria  
Telephone +43 1 224 00 0  
Fax +43 1 22 400 333

FN 269858a  
CCC Commercial Court of Vienna

Website [www.borealisgroup.com](http://www.borealisgroup.com)

### **Standard Packaging**

Queo 0201 is supplied as free flowing pellets in bulk or packaged in 25 kg bags. The 25 kg bags are assembled on a heat treated pallet to a net weight of 1'375 kg and covered with a stretch hood.

### **Disclaimer**

**The product(s) mentioned herein are not intended to be used for medical, pharmaceutical or healthcare applications and we do not support their use for such applications.**

To the best of our knowledge, the information contained herein is accurate and reliable as of the date of publication, however we do not assume any liability whatsoever for the accuracy and completeness of such information.

**Borealis makes no warranties which extend beyond the description contained herein. Nothing herein shall constitute any warranty of merchantability or fitness for a particular purpose.**

**It is the customer's responsibility to inspect and test our products in order to satisfy itself as to the suitability of the products for the customer's particular purpose. The customer is responsible for the appropriate, safe and legal use, processing and handling of our products.**

No liability can be accepted in respect of the use of Borealis' products in conjunction with other materials. The information contained herein relates exclusively to our products when not used in conjunction with any third party materials.

Queo™ is a trademark of the Borealis Group.