

Stamylex[®] 2258

Linear low density polyethylene

DATA SHEET

Description

Stamylex[®] 2258 is a butene based linear low density polyethylene produced in a solution polymerisation process using a Ziegler – Natta catalyst.

This grade contains an additive package for thermal stabilization and a processing aid.

Characterized by good processing properties and toughness, Stamylex 2258 is used primarily to manufacture articles with extremely long flow paths and stringent warp requirements

Applications

A high resistance to environmental stress cracking and its dimensional stability render Stamylex 2258 particularly suited for (domestic) applications, which require good resistance to the aggressive cleaning environment and high temperatures typically encountered, for example, in dish washing machines.

General properties	<i>Units</i>	<i>Typical values</i>	<i>Method</i>
---------------------------	--------------	-----------------------	---------------

Melt Flow Rate (2.16 kg/190°C)	dg/min	24	ISO 1133
Density (23°C)	kg/m ³	926	ISO 1183


Moulded plaques properties	<i>Units</i>	<i>Typical values</i>	<i>Method</i>
-----------------------------------	--------------	-----------------------	---------------

Tensile test [1]			ISO 527-2
Stress at break [2]	MPa	8	
Strain at break [2]	%	65	
Modulus of elasticity in tension	MPa	300	
Notched Izod at + 23 °C	kJ/m ³	47	ISO 180 (1A)
Shore hardness D		49	ISO 868

Thermal properties			
---------------------------	--	--	--

Vicat softening temperature at 10 N	°C	94	ISO 306
DSC melting point	°C	118	ASTM D3418

[1] Test specimen as per ISO 527-2 type 1 BA, thickness 2 mm
 [2] Speed of testing : 500 mm/min

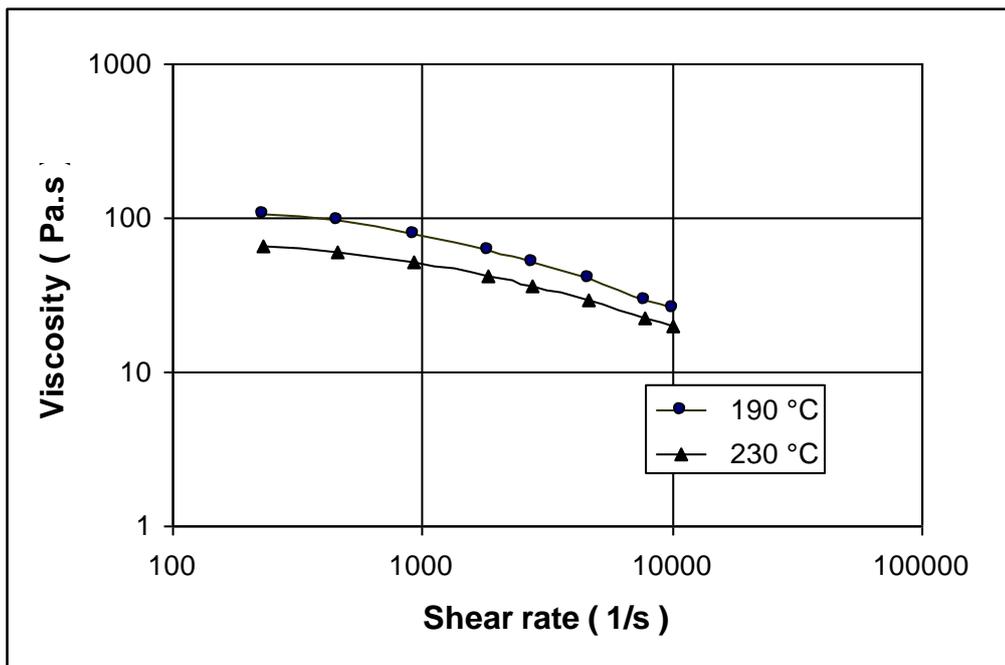

Food Law Compliance and Product Handling

Detailed and specific information on food law compliance and material safety aspects of Stamylex grades will be provided upon request.

Standard Packaging

Stamylex 2258 is supplied as free flowing pellets in bulk or packaged in 25 kg bags. The 25 kg bags are assembled on a heat treated pallet to a net weight of 1'375 kg and covered with a stretch hood.

Further information

Borealis AG
Wagramerstrasse 17-19
1220 Vienna
Austria
Telephone +43 1 224 00 0
Fax +43 1 22 400 333

FN 269858a
CCC Commercial Court of Vienna

Website www.borealisgroup.com

Disclaimer

The product(s) mentioned herein are not intended to be used for medical, pharmaceutical or healthcare applications and we do not support their use for such applications.

To the best of our knowledge, the information contained herein is accurate and reliable as of the date of publication, however we do not assume any liability whatsoever for the accuracy and completeness of such information.

Borealis makes no warranties which extend beyond the description contained herein. Nothing herein shall constitute any warranty of merchantability or fitness for a particular purpose.

It is the customer's responsibility to inspect and test our products in order to satisfy itself as to the suitability of the products for the customer's particular purpose. The customer is responsible for the appropriate, safe and legal use, processing and handling of our products.

No liability can be accepted in respect of the use of Borealis' products in conjunction with other materials. The information contained herein relates exclusively to our products when not used in conjunction with any third party materials.

Stamylex® is a trademark of the Borealis Group.