

Grilon BG-30 S

PA6-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG

Product Texts


Product designation according to ISO 1874:

PA 6, MHR, 14-090, GF30


Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	9500 / 6000	MPa	ISO 527-1/-2
Stress at break	185 / 125	MPa	ISO 527-1/-2
Strain at break	5 / 10	%	ISO 527-1/-2
Charpy impact strength (+23°C)	75 / 90	kJ/m ²	ISO 179/1eU
Charpy impact strength (-30°C)	65 / 70	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	11 / 20	kJ/m ²	ISO 179/1eA
Charpy notched impact strength (-30°C)	8 / 9	kJ/m ²	ISO 179/1eA
<hr/>			
Mechanical properties (TPE)	dry / cond	Unit	Test Standard
Ball indentation hardness	210 / 100	MPa	ISO 2039-1
<hr/>			
Thermal properties	dry / cond	Unit	Test Standard
Melting temperature (10°C/min)	222 / -	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	205 / -	°C	ISO 75-1/-2
Temp. of deflection under load (8.00 MPa)	135 / -	°C	ISO 75-1/-2
Coeff. of linear therm. expansion (parallel)	20 / -	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion (normal)	110 / -	E-6/K	ISO 11359-1/-2
Burning Behav. at thickness h	HB / -	class	IEC 60695-11-10
Thickness tested	0.8 / -	mm	IEC 60695-11-10
Max. usage temperature (long term)	90 - 110	°C	ISO 2578
Max. usage temperature (short term)	160	°C	EMS
<hr/>			
Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity	1E12 / 1E11	Ohm*m	IEC 60093
Surface resistivity	- / 1E12	Ohm	IEC 60093
Electric strength	40 / 37	kV/mm	IEC 60243-1
Comparative tracking index	- / 500	-	IEC 60112
<hr/>			
Other properties	dry / cond	Unit	Test Standard
Water absorption	7 / -	%	Sim. to ISO 62
Humidity absorption	2 / -	%	Sim. to ISO 62
Density	1350 / -	kg/m ³	ISO 1183
<hr/>			
Rheo/Phys properties	dry / cond	Unit	Test Standard
Molding shrinkage (parallel)	0.1 / -	%	ISO 294-4, 2577
Molding shrinkage (normal)	0.8 / -	%	ISO 294-4, 2577

Diagrams


Viscosity-shear rate

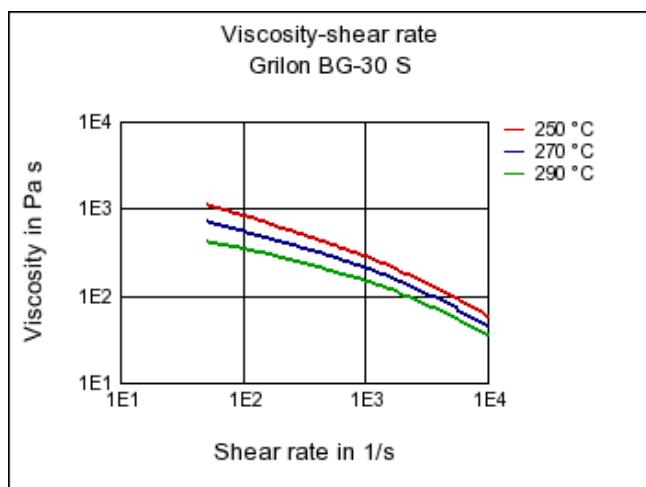


Shearstress-shear rate

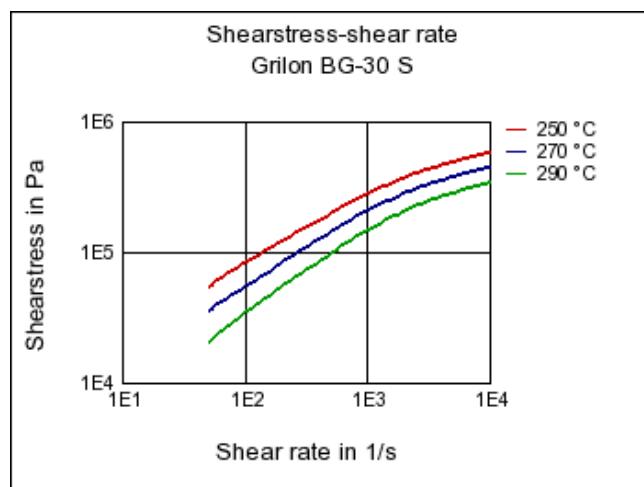


Dynamic Shear modulus-temperature

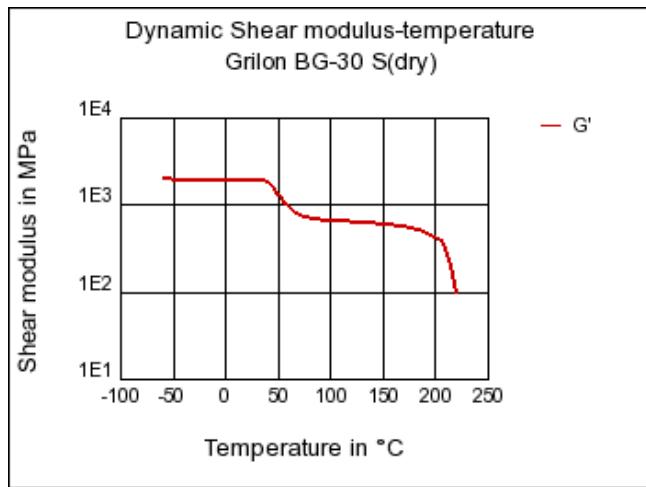


Dynamic Shear modulus-temperature

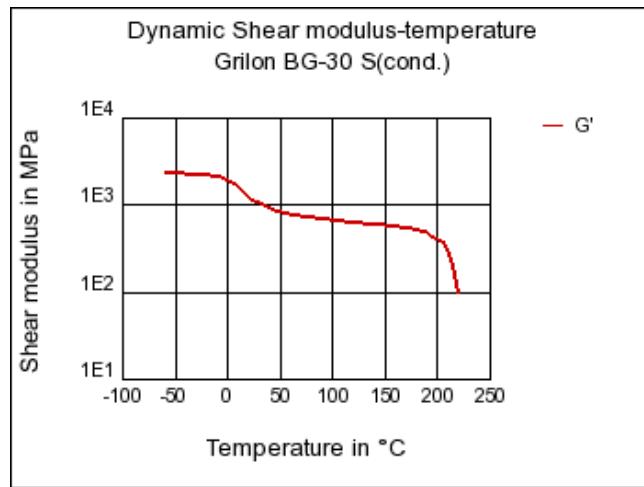


Stress-strain

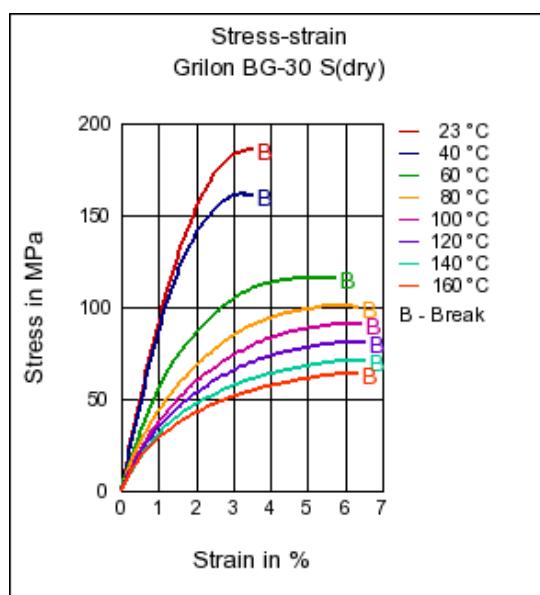


Stress-strain

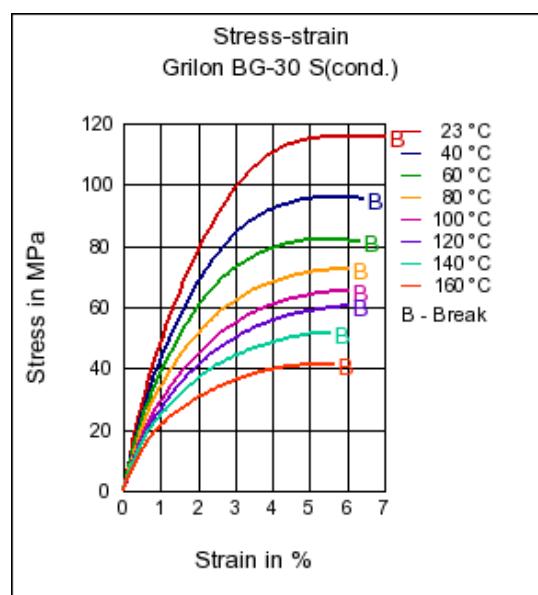


Secant modulus-strain

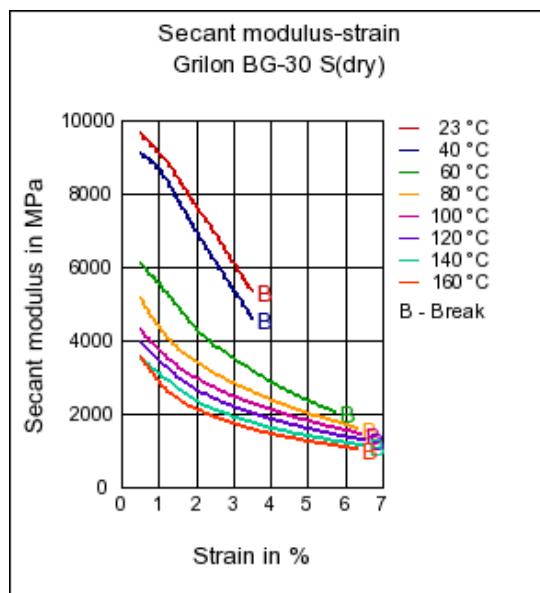


Secant modulus-strain

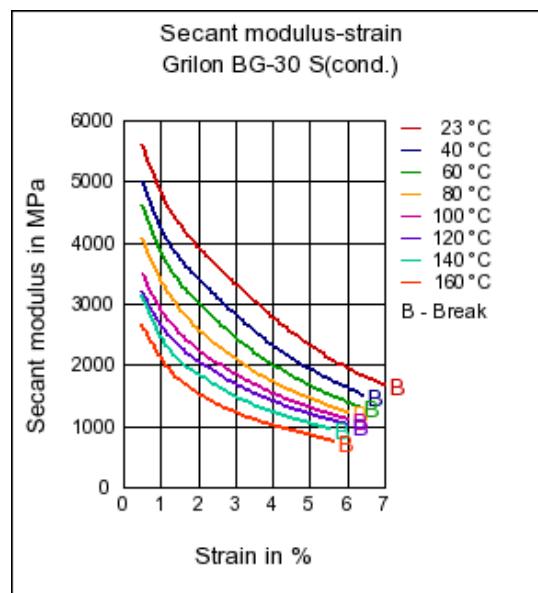


Stress-strain (isochronous) 23°C

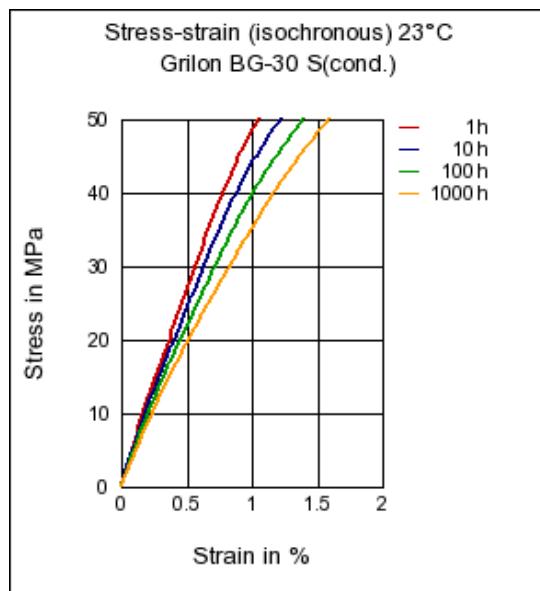


Creep curve °C

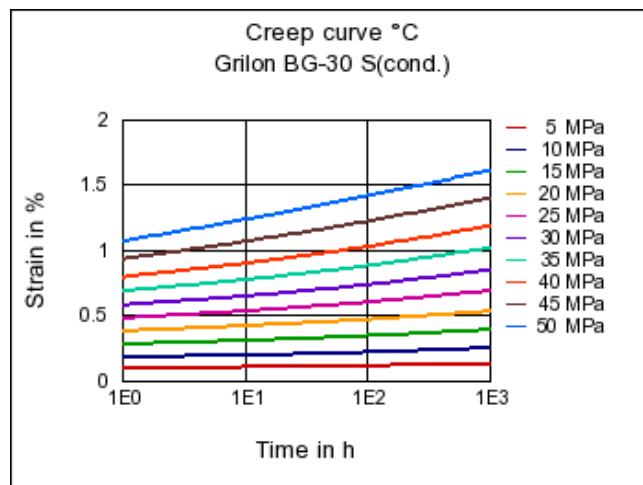


Creep modulus-time 23°C

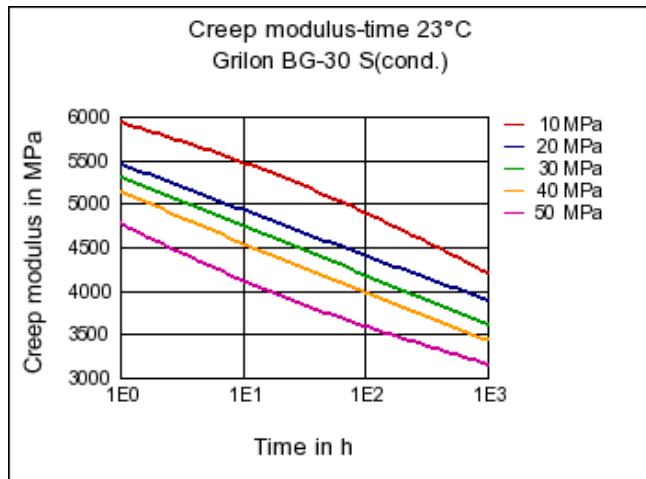

Specific volume-temperature (pvT)

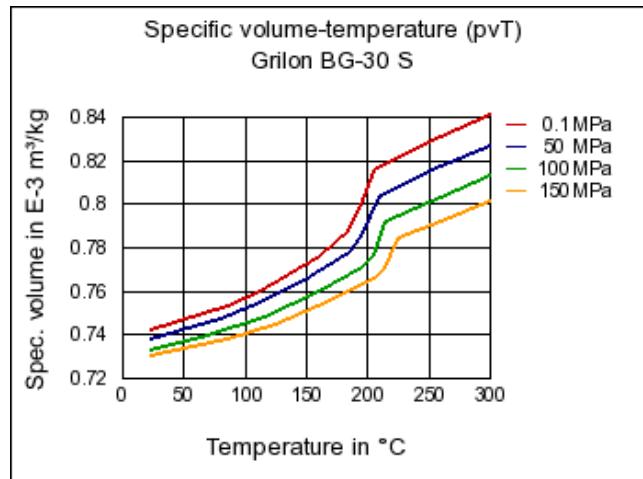

Tensile modulus-temperature

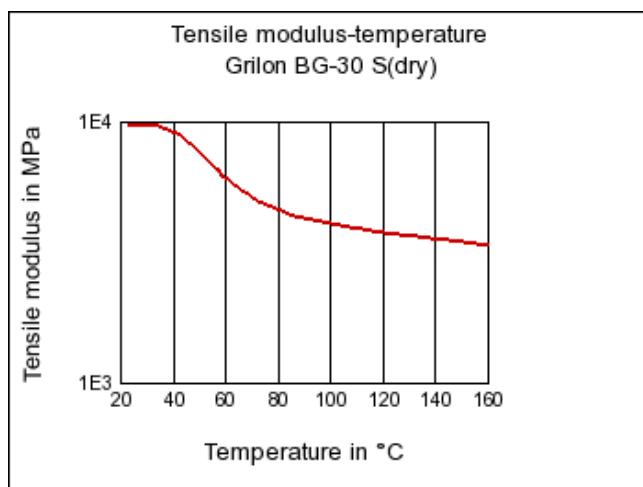

Characteristics

Processing

Injection Molding

Delivery form

Granules

Regional Availability

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Chemical Media Resistance

Acids

- Acetic Acid (5% by mass) (23°C)
- Citric Acid solution (10% by mass) (23°C)
- Lactic Acid (10% by mass) (23°C)
- Hydrochloric Acid (36% by mass) (23°C)
- Nitric Acid (40% by mass) (23°C)
- Sulfuric Acid (38% by mass) (23°C)
- Sulfuric Acid (5% by mass) (23°C)
- Chromic Acid solution (40% by mass) (23°C)

Bases

- Sodium Hydroxide solution (35% by mass) (23°C)
- Sodium Hydroxide solution (1% by mass) (23°C)
- Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- Isopropyl alcohol (23°C)
- Methanol (23°C)
- Ethanol (23°C)

Hydrocarbons

- n-Hexane (23°C)
- Toluene (23°C)
- iso-Octane (23°C)

Ketones

- Acetone (23°C)

Ethers

- Diethyl ether (23°C)

Mineral oils

- SAE 10W40 multigrade motor oil (23°C)
- SAE 10W40 multigrade motor oil (130°C)
- SAE 80/90 hypoid-gear oil (130°C)
- Insulating Oil (23°C)

Standard Fuels

- ISO 1817 Liquid 1 (60°C)
- ISO 1817 Liquid 2 (60°C)
- ISO 1817 Liquid 3 (60°C)
- ISO 1817 Liquid 4 (60°C)
- Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

- Sodium Chloride solution (10% by mass) (23°C)
- Sodium Hypochlorite solution (10% by mass) (23°C)
- Sodium Carbonate solution (20% by mass) (23°C)
- Sodium Carbonate solution (2% by mass) (23°C)
- Zinc Chloride solution (50% by mass) (23°C)

Other

- Ethyl Acetate (23°C)
- Hydrogen peroxide (23°C)
- DOT No. 4 Brake fluid (130°C)
- Ethylene Glycol (50% by mass) in water (108°C)
- 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- 50% Oleic acid + 50% Olive Oil (23°C)
- Water (23°C)
- Deionized water (90°C)
- Phenol solution (5% by mass) (23°C)