

TECHNICAL DATA SHEET

GRILON CR 9

General product description

Grilon CR 9 is a copolyamide with low melting temperature..

Grilon CR 9 shows the following features:

- High flexibility and toughness
- Good thermoforming and orientation properties
- High shrinkage
- Good transparency
- Low melting point (200°C)

Application examples

Grilon CR 9 is suitable for the manufacture of both blown and cast coextruded film.

Grilon CR 9 is suitable for the following applications:

Flexible packaging, e.g. "Cook in ham", consumer packaging of meat, cheese, smoked ham, fish, sausage, poultry and peanuts as well as many other foodstuffs.

GRILON®
EMS

PROPERTIES

Thermal Properties

		Standard	Unit	Grilon CR 9
Melting point	DSC	ISO 11357	°C	200
Melt volume rate (MVR)	275°C / 5 kg	ISO 1133	cm ³ /10 min	120

General Properties

Density		ISO 1183	g/cm ³	1.10
Water absorption	23°C/sat.	ISO 62	%	9
Moisture absorption	23°C/50 % RH	ISO 62	%	2
Shrink ¹⁾		EMS	%	30
Gloss	60°	ISO 2813	-	130
Haze		ISO 14782	%	-

Barrier Properties (50 µm films)

O ₂ -Transmission rate	23°C/ 0 % RH	DIS/ISO 15105-1	cm ³ /m ² 24h bar	55
	23°C/85 % RH		cm ³ /m ² 24h bar	75
CO ₂ -Transmission rate	23°C/ 0 % RH	DIS/ISO 15105-2	cm ³ /m ² 24h bar	200
	23°C/85 % RH		cm ³ /m ² 24h bar	350
Moisture vapour transmission rate	23°C/85 % RH	DIS/ISO 15106-1	g/m ² 24h	15


Mechanical Properties

Tensile E-Modulus		ISO 527-2	MPa	550
Stress at yield	parallel normal	ISO 527-3	MPa	30
				30
Strain at yield	parallel normal	ISO 527-3	%	10
				10
Stress at break	parallel normal	ISO 527-3	MPa	80
				75
Strain at break	parallel normal	ISO 527-3	%	800
				900
Tear resistance	parallel normal	ISO 6383-1	N/mm	65
				65
Elmendorf tear resistance	parallel normal	ISO 6383-2	N	20
				20
Dart drop impact	A B	ISO 7765-1	g	-
				-
Gelboflextest	900 cycles	EMS	holes/ m ²	800


Product nomenclature acc. ISO 1874: PA 6/12 FT, 16-020

¹⁾ 80 µm film applied on 160 µm Ionomer, biaxially oriented at 70°C (draw ratio 2:1), afterwards shrinkage in water at 85°C

Stress & Strain Grilon CR 9

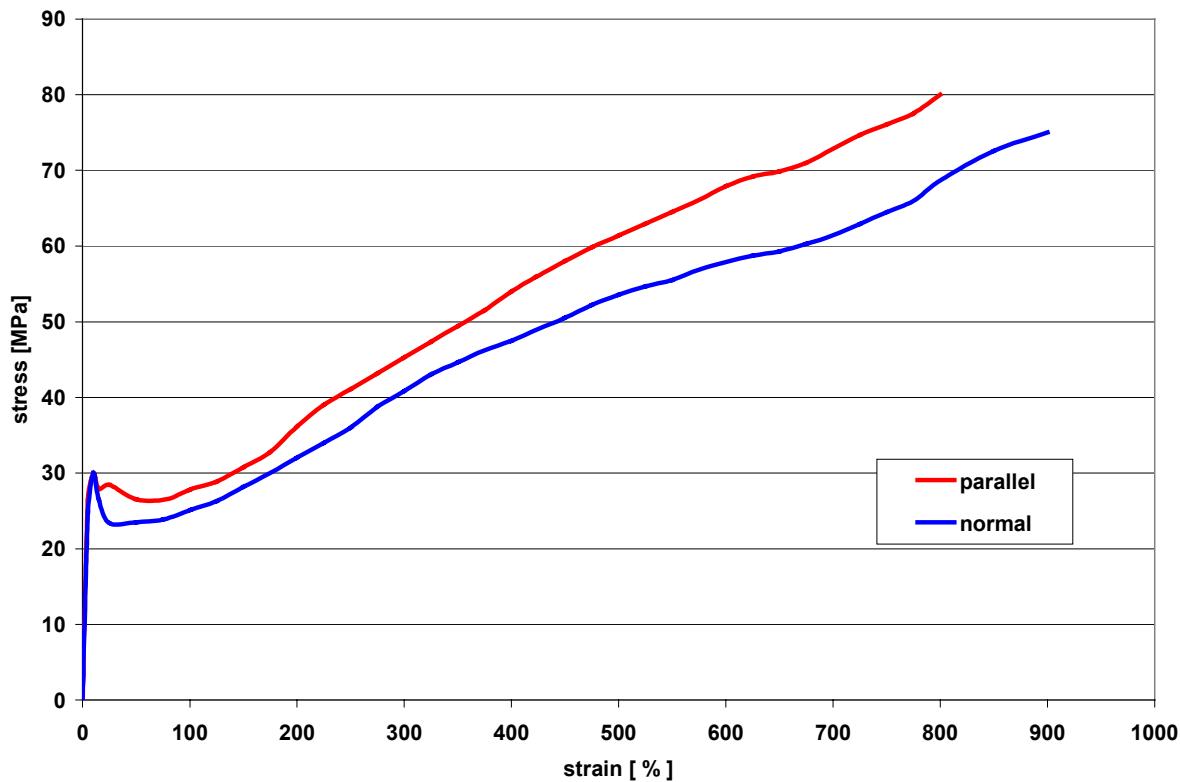

Viscosity function Grilon CR 9

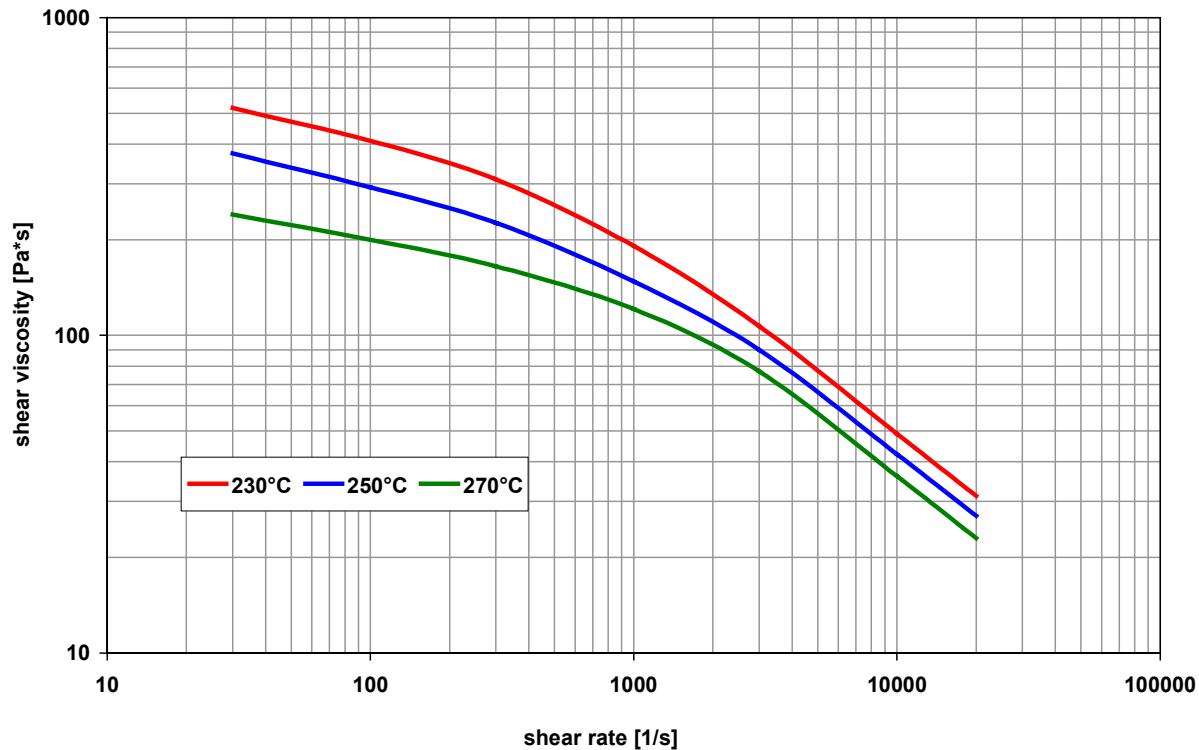

Processing information for the extrusion of Grilon CR 9

This technical data sheet for Grilon CR 9 provides you with useful information on material preparation, machine requirements and processing.

MATERIAL PREPARATION

Grilon CR 9 is delivered dry and ready for processing in sealed, air tight packaging. Predrying is not necessary.

Storage

Sealed, undamaged bags can be kept over a long period of time in storage facilities which are dry, protected from the influence of weather and where the bags can be protected from damage.

Handling and safety

Detailed information can be obtained from the "Material Safety Data Sheet" (MSDS) which can be requested with every material order.

Drying

Grilon CR 9 is dried and packed with a moisture content of less than 0.10 %. The processing of moist material reduces the optical and mechanical quality of the application. A too high moisture content can result in fish eyes, streaks and brittleness.

Drying can be done as follows:

Desiccant dryer

Temperature:	max. 80°C
Time:	4 - 12 hours
Dew point of the dryer:	-30°C

Vacuum oven

Temperature:	max. 100°C
Time:	4 - 12 hours

Drying time

If there is only slight evidence of foaming of the melt or just traces of silver streaks on the part, then the above mentioned minimal drying time will be sufficient. Material, which is stored in open over days, which shows strong foaming, is unusually easy flowing melt or streaks on the article, then the maximal drying time is required.

Drying temperature

Polyamides are subjected to the affects of oxidation at temperatures above 80°C in the presence of oxygen. Visible yellowing of the material is an indication of oxidation. Hence temperatures above 80°C for desiccant dryers and temperatures above 100°C for vacuum ovens should be avoided.

At longer residence times (over 1 hour) hopper heating or a hopper dryer (80°C) is useful.

MACHINE REQUIREMENTS

Grilon CR 9 can be processed economically and without problems on all extrusion lines suitable for polyamides.

Screw

Wear protected, Universal 3 zone screws are recommended.

Screw

Length:	24 D - 30 D
Compression ration:	2.5 - 3.5

Heating

At least three separately controllable heating zones, capable of reaching cylinder temperatures of up to 270°C are recommended. The cylinder flange and adapter must be able to be heated.

PROCESSING

Temperatures

For the start up of processing Grilon CR 9 the following parameters can be recommended:

Temperatures

Hopper	15 - 60°C
Zone 1	210 - 220°C
Zone 2	220 - 230°C
Zone 3	220 - 230°C
Adapter	220 - 230°C
Mould	220 - 230°C
Die	220 - 230°C
Melt	220 - 230°C

In cases where the use of grooved feed zones is employed it is recommended to temper this zone between 60 and 80°C.

CUSTOMER SERVICES

EMS-GRIVORY is a specialist in polyamide synthesis and the processing of these materials. Our customer services are not only concerned with the manufacturing and supply of engineering thermoplastics but also provide full technical support including:

- Rheological design calculation / FEA
- Prototype tooling
- Material selection
- Processing support
- Mould and component design

We are happy to advise you. Simply call one of our sales offices.

The recommendations and data given are based on our experience to date, however, no liability can be assumed in connection with their usage and processing.

TOO/08.2002
www.emsgrivory.com