

Stanyl® TE200F8

PA46-GF40

DSM Engineering Plastics

Product Texts

40% Glass Reinforced, Heat Stabilized, for E&E applications

ISO 1043 PA46-GF40

[Stanyl website](#)





Mechanical properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	13000 / 8000	MPa	ISO 527-1/-2
Stress at break	230 / 140	MPa	ISO 527-1/-2
Strain at break	3 / 6	%	ISO 527-1/-2
Tensile creep modulus, 1000h	* / 6000	MPa	ISO 899-1
Charpy impact strength (+23°C)	95 / 100	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	75 / 85	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	14 / 21	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	12 / 12	kJ/m ²	ISO 179/1eA
Thermal properties			
ISO Data			
Melting temperature (10°C/min)	295 / *	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	75 / *	°C	ISO 11357-1/-2
Temp. of deflection under load (1.80 MPa)	290 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	290 / *	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	290 / *	°C	ISO 306
Coeff. of linear therm. expansion, parallel	25 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	50 / *	E-6/K	ISO 11359-1/-2
Burning behav. at 1.5 mm nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	1.5 / *	mm	IEC 60695-11-10
Burning behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	0.8 / *	mm	IEC 60695-11-10
Oxygen index	22 / *	%	ISO 4589-1/-2
Electrical properties			
ISO Data			
Relative permittivity, 100Hz	4.4 / 12	-	IEC 60250
Relative permittivity, 1MHz	4 / 4.6	-	IEC 60250
Dissipation factor, 100Hz	80 / 1500	E-4	IEC 60250
Dissipation factor, 1MHz	230 / 900	E-4	IEC 60250
Volume resistivity	>1E13 / 1E10	Ohm*m	IEC 60093
Surface resistivity	* / 1E14	Ohm	IEC 60093
Electric strength	35 / 25	kV/mm	IEC 60243-1
Comparative tracking index	400 / -	-	IEC 60112
Other properties			
ISO Data			
Water absorption	8.1 / *	%	Sim. to ISO 62
Humidity absorption	2.2 / *	%	Sim. to ISO 62
Density	1510 / -	kg/m ³	ISO 1183
Material specific properties			
ISO Data			
Viscosity number	145 / *	cm ³ /g	ISO 307, 1157, 1628

Stanyl® TE200F8


PA46-GF40

DSM Engineering Plastics


Rheological calculation properties	Value	Unit	Test Standard
ISO Data			
Density of melt	1320	kg/m ³	-
Thermal conductivity of melt	0.344	W/(m K)	-
Spec. heat capacity of melt	1930	J/(kg K)	-
Eff. thermal diffusivity	1.35E-7	m ² /s	-

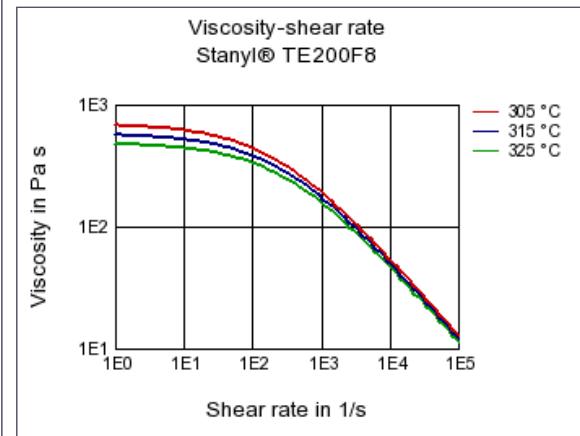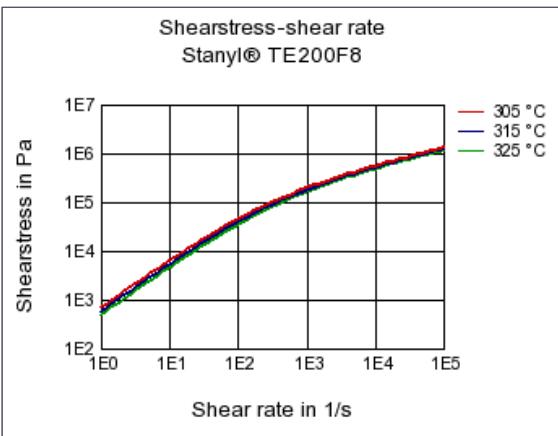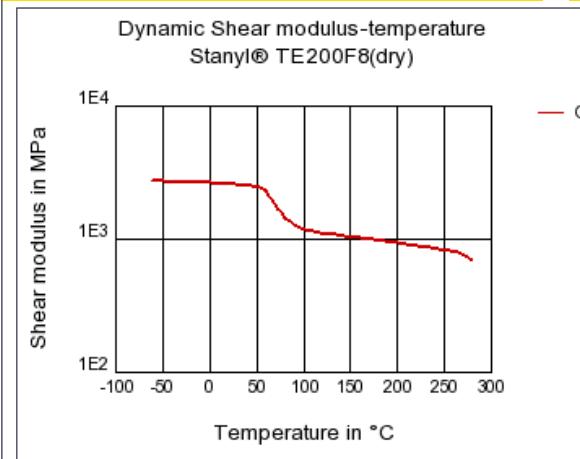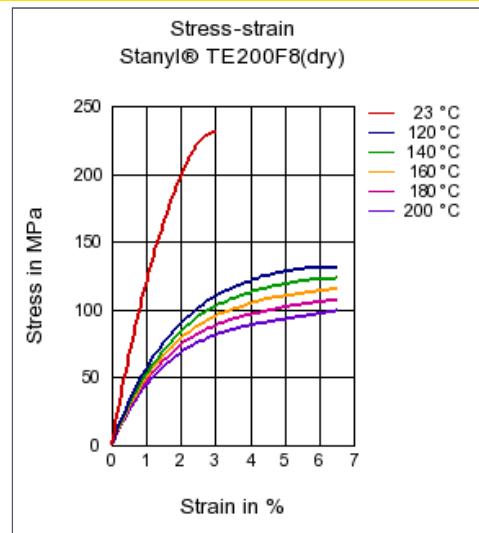Diagrams**Viscosity-shear rate****Shearstress-shear rate****Dynamic Shear modulus-temperature****Stress-strain**


Stress-strain

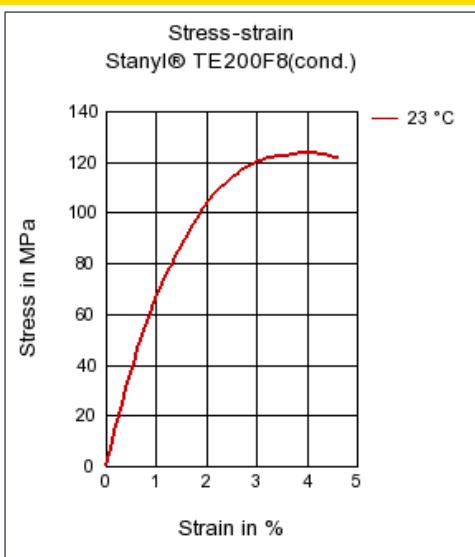


Secant modulus-strain

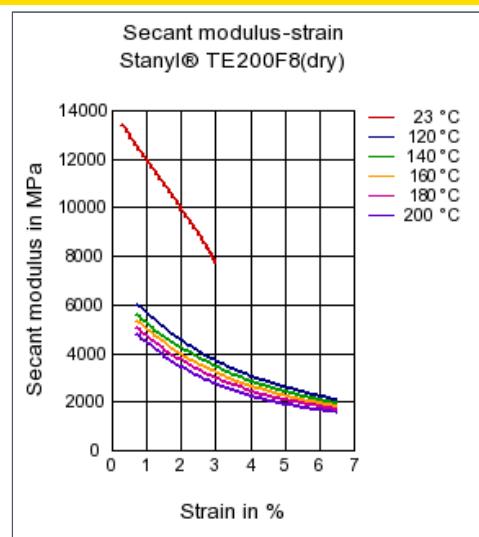


Secant modulus-strain

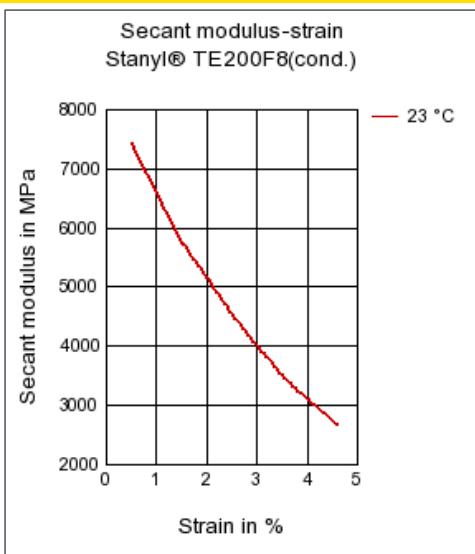


Stress-strain (isochronous) 23°C

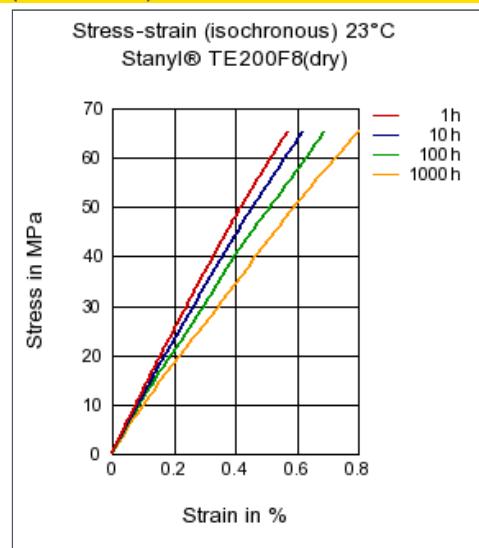


Creep modulus-time 23°C

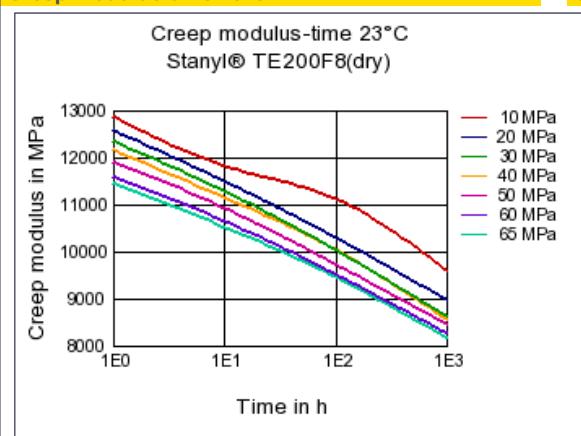


Stress-strain (isochronous) 140°C

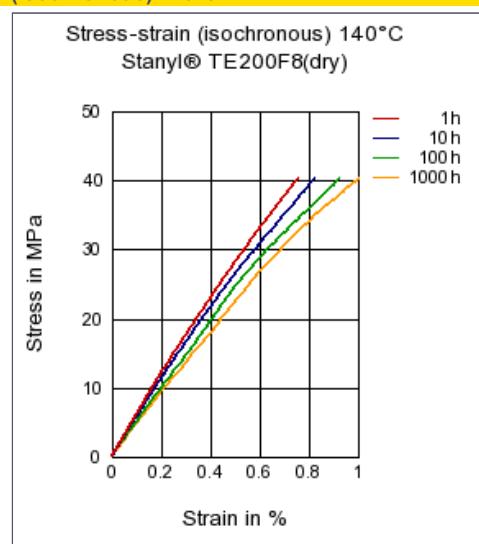


Creep modulus-time 140°C

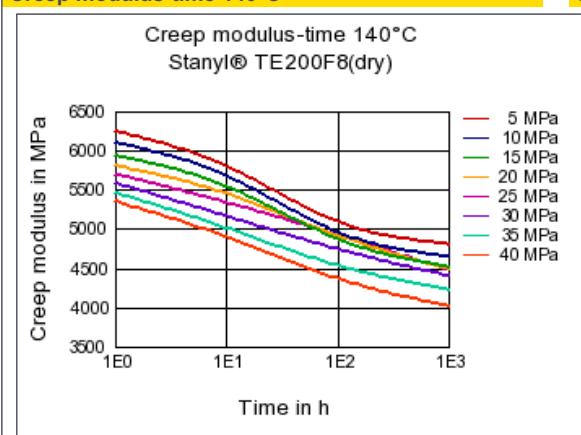

Stress-strain (isochronous) 160°C

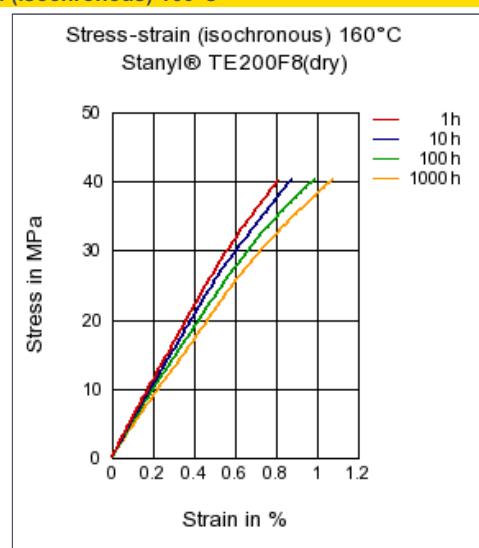

Creep modulus-time 160°C

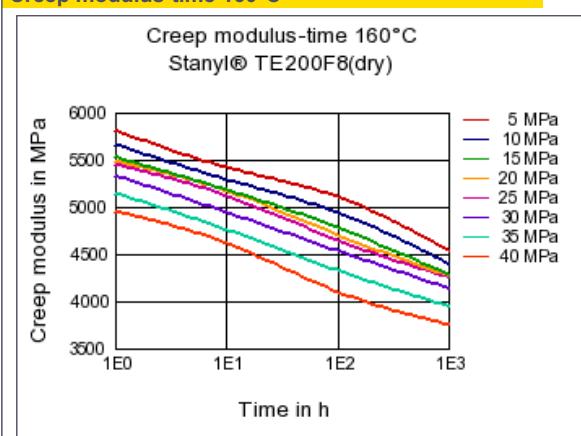

Characteristics

Processing

Injection Molding

Special Characteristics

Platable, Heat stabilized or stable to heat

Delivery form

Pellets

Other text information

Injection Molding

[Injection Molding Recommendations](#)