

Stanyl® TW341-B

PA46

DSM Engineering Plastics

Product Texts

Heat Stabilized, Lubricated


ISO 1043 PA46

[Stanyl website](#)


Mechanical properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	3300 / 1000	MPa	ISO 527-1/-2
Yield stress	100 / 55	MPa	ISO 527-1/-2
Yield strain	10 / 20	%	ISO 527-1/-2
Nominal strain at break	30 / >50	%	ISO 527-1/-2
Tensile creep modulus, 1000h	* / 550	MPa	ISO 899-1
Charpy impact strength (+23°C)	N / N	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	N / N	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	9 / 35	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	4 / 4	kJ/m ²	ISO 179/1eA
Thermal properties			
ISO Data			
Melting temperature (10°C/min)	295 / *	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	75 / *	°C	ISO 11357-1/-2
Temp. of deflection under load (1.80 MPa)	190 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	280 / *	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	290 / *	°C	ISO 306
Coeff. of linear therm. expansion, parallel	85 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	110 / *	E-6/K	ISO 11359-1/-2
Oxygen index	27 / *	%	ISO 4589-1/-2
Electrical properties			
ISO Data			
Volume resistivity	1E12 / 1E7	Ohm*m	IEC 60093
Surface resistivity	* / 1E12	Ohm	IEC 60093
Electric strength	20 / 10	kV/mm	IEC 60243-1
Comparative tracking index	350 / -	-	IEC 60112
Other properties			
ISO Data			
Water absorption	13.5 / *	%	Sim. to ISO 62
Humidity absorption	3.7 / *	%	Sim. to ISO 62
Density	1180 / -	kg/m ³	ISO 1183
Material specific properties			
ISO Data			
Viscosity number	185 / *	cm ³ /g	ISO 307, 1157, 1628

Diagrams


Viscosity-shear rate

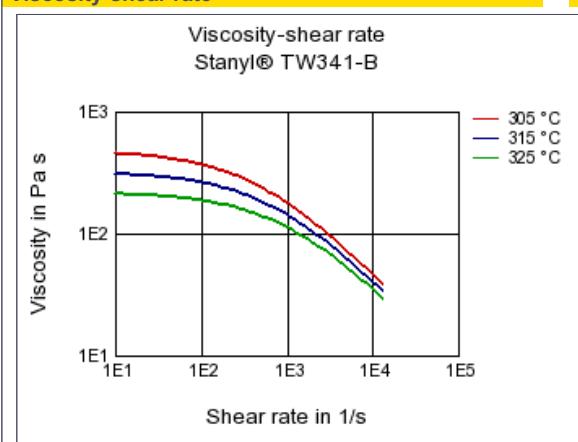


Shearstress-shear rate

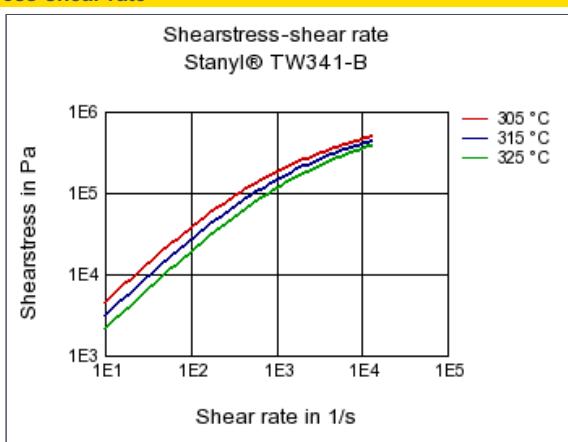


Dynamic Shear modulus-temperature

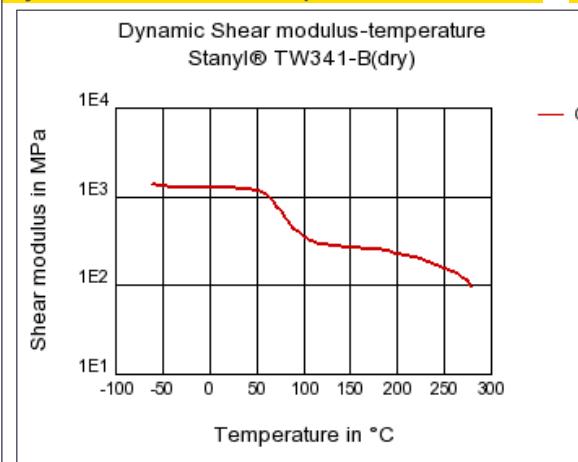


Stress-strain

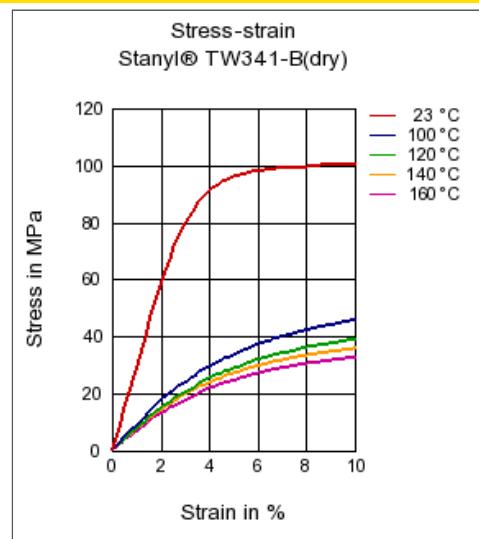


Stress-strain

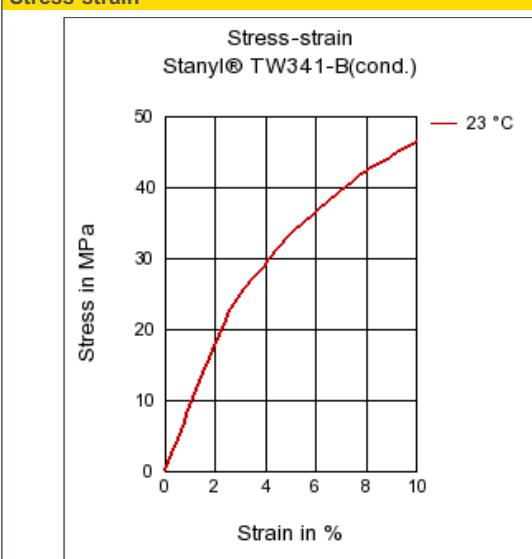


Secant modulus-strain

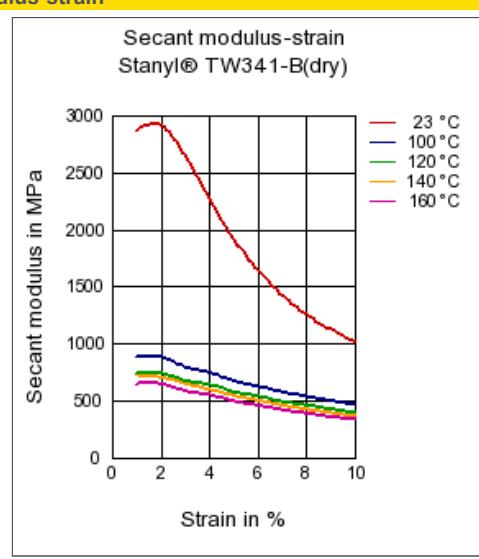


Secant modulus-strain

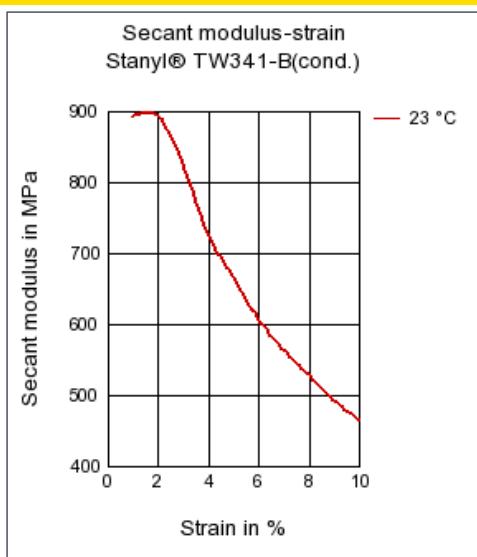


Stress-strain (isochronous) 23°C

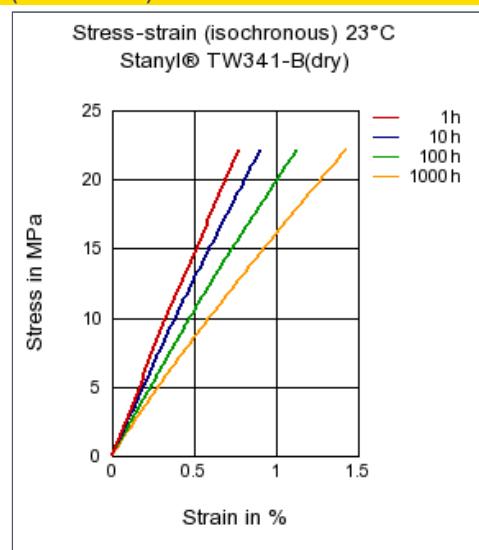


Creep modulus-time 23°C

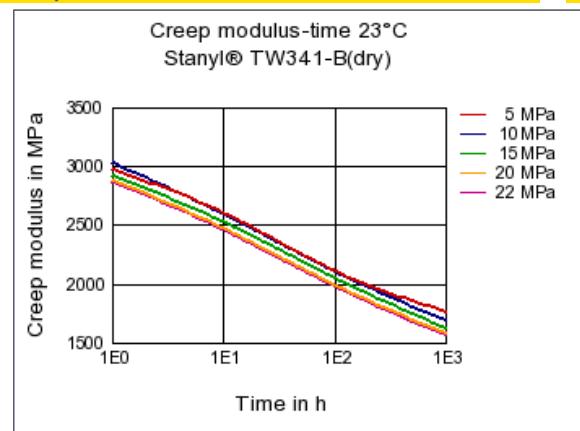


Stress-strain (isochronous) 100°C

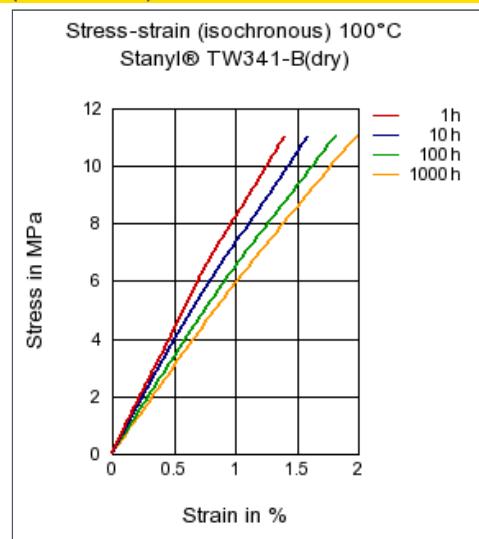


Creep modulus-time 100°C

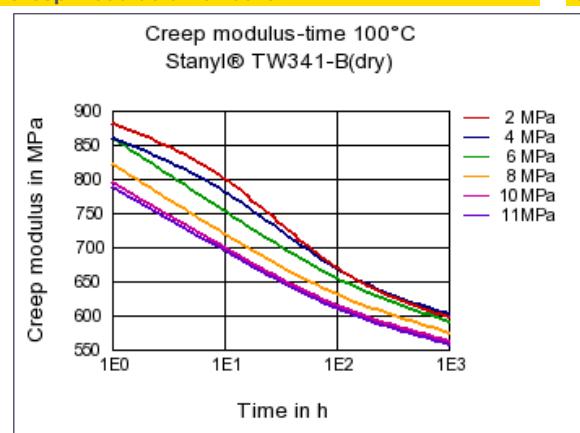


Stress-strain (isochronous) 140°C

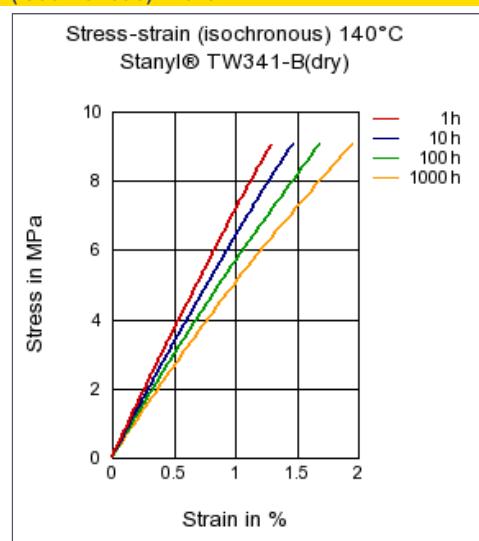


Creep modulus-time 140°C

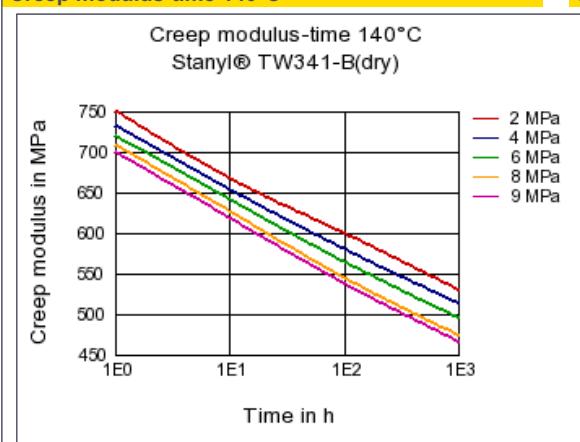

Stress-strain (isochronous) 160°C

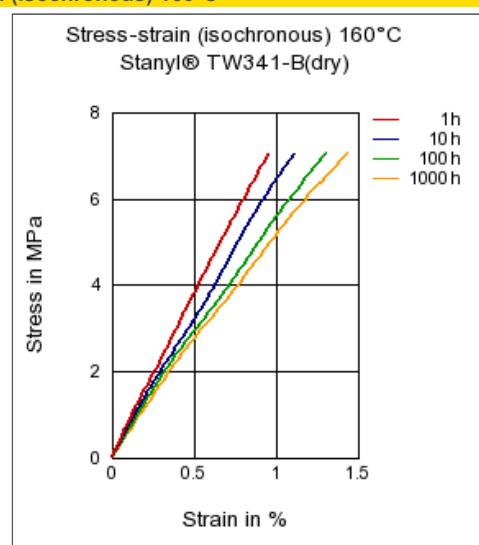

Creep modulus-time 160°C

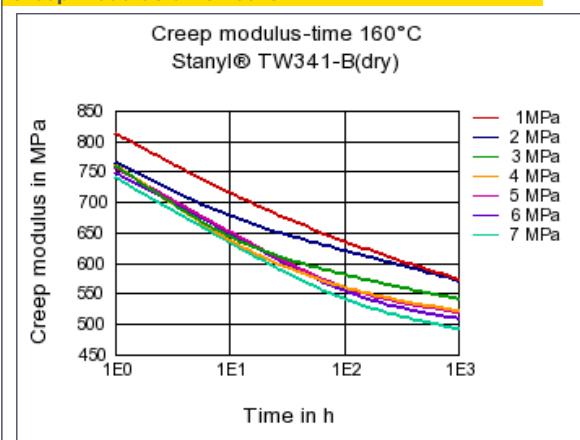

Characteristics

Processing

Injection Molding

Additives

Lubricants, Release agent

Delivery form

Pellets

Special Characteristics

Platable, Heat stabilized or stable to heat

Other text information

Injection Molding

[Injection Molding Recommendations](#)