

Akulon® K224-G0

PA6-GF50

DSM Engineering Plastics

Product Texts

50% Glass Reinforced

ISO 1043 PA6-GF50

[Akulon website](#)

Rheological properties	dry / cond	Unit	Test Standard
ISO Data			
Molding shrinkage, parallel	0.3 / *	%	ISO 294-4, 2577
Molding shrinkage, normal	0.8 / *	%	ISO 294-4, 2577
Mechanical properties			
ISO Data	dry / cond	Unit	Test Standard
	Tensile Modulus	16500 / 10500	MPa
	Stress at break	220 / 150	MPa
	Strain at break	3 / 4.5	%
	Charpy impact strength (+23°C)	100 / 105	kJ/m ²
	Charpy impact strength, -30°C	95 / 95	kJ/m ²
	Charpy notched impact strength (+23°C)	20 / 22	kJ/m ²
	Charpy notched impact strength, -30°C	15 / 15	kJ/m ²
Thermal properties			
ISO Data	dry / cond	Unit	Test Standard
	Melting temperature (10°C/min)	220 / *	°C
	Temp. of deflection under load (1.80 MPa)	210 / *	°C
	Temp. of deflection under load (0.45 MPa)	220 / *	°C
	Coeff. of linear therm. expansion, parallel	10 / *	E-6/K
	Coeff. of linear therm. expansion, normal	50 / *	E-6/K
	Burning behav. at 1.5 mm nom. thickn.	HB / *	class
	Thickness tested	1.5 / *	mm
	UL recognition	UL / *	-
	Burning behav. at thickness h	HB / *	class
	Thickness tested	3.0 / *	mm
Electrical properties			
ISO Data	dry / cond	Unit	Test Standard
	Relative permittivity, 100Hz	3.5 / 14	-
	Relative permittivity, 1MHz	5.2 / 4.5	-
	Dissipation factor, 100Hz	50 / 3000	E-4
	Dissipation factor, 1MHz	150 / 1200	E-4
	Volume resistivity	1E13 / 1E11	Ohm*m
	Surface resistivity	* / 1E14	Ohm
	Electric strength	35 / 25	kV/mm
	Comparative tracking index	- / 600	-
Other properties			
ISO Data	dry / cond	Unit	Test Standard
	Water absorption	4.5 / *	%
	Humidity absorption	1.4 / *	%
	Density	1560 / -	kg/m ³

Akulon® K224-G0


PA6-GF50

DSM Engineering Plastics

Rheological calculation properties	Value	Unit	Test Standard
ISO Data			
Density of melt	1380	kg/m ³	-
Thermal conductivity of melt	0.37	W/(m K)	-
Spec. heat capacity of melt	1900	J/(kg K)	-
Eff. thermal diffusivity	1.41E-7	m ² /s	-

Diagrams


Viscosity-shear rate

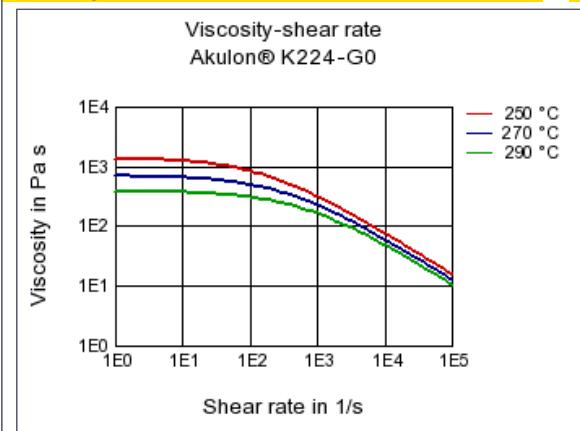


Shearstress-shear rate



Dynamic Shear modulus-temperature

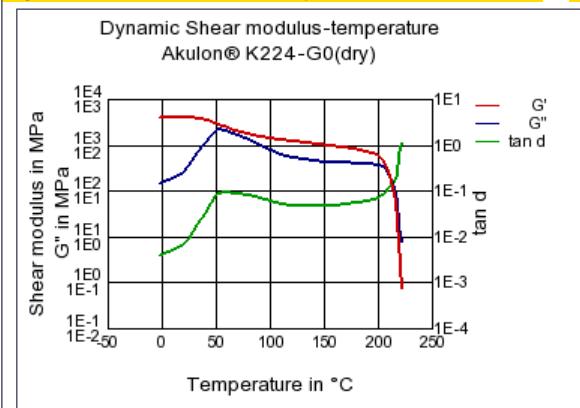

Specific volume-temperature (pvT)

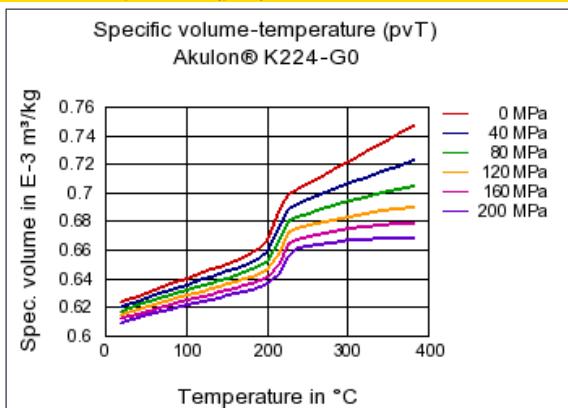

Characteristics

Processing

Injection Molding

Additives

Release agent

Delivery form

Pellets

Other text information

Injection Molding

[Injection Molding Recommendations](#)