

**Technyl® C 216 V30**

PA6-GF30

Solvay Engineering Plastics

**Product Texts**

Polyamide 6, 30 % glass fibre reinforced

**Mechanical properties** dry / cond Unit Test Standard**ISO Data**

Tensile Modulus	9600 / 6200	MPa	ISO 527-1/-2
Stress at break	190 / -	MPa	ISO 527-1/-2
Strain at break	3.8 / -	%	ISO 527-1/-2
Charpy impact strength (+23°C)	100 / -	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength (+23°C)	14 / -	kJ/m <sup>2</sup>	ISO 179/1eA

**Thermal properties** dry / cond Unit Test Standard**ISO Data**

Melting temperature (10°C/min)	222 / *	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	55 / *	°C	ISO 11357-1/-2
Temp. of deflection under load (1.80 MPa)	200 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	217 / *	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	35 / *	E-6/K	ISO 11359-1/-2
Burning behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	0.8 / *	mm	IEC 60695-11-10

**Electrical properties** dry / cond Unit Test Standard**ISO Data**


Relative permittivity, 1MHz	3.8 / 4.5	-	IEC 60250
Dissipation factor, 1MHz	200 / -	E-4	IEC 60250
Volume resistivity	1E13 / 1E9	Ohm*m	IEC 60093
Surface resistivity	* / 1E11	Ohm	IEC 60093
Electric strength	- / 22	kV/mm	IEC 60243-1
Comparative tracking index	475 / -	-	IEC 60112

**Other properties** dry / cond Unit Test Standard**ISO Data**


Humidity absorption	2.1 / *	%	Sim. to ISO 62
Density	1350 / -	kg/m <sup>3</sup>	ISO 1183

## Diagrams


## Viscosity-shear rate

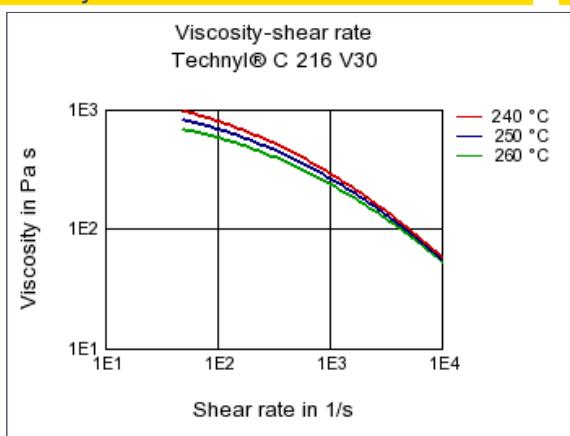


## Shearstress-shear rate

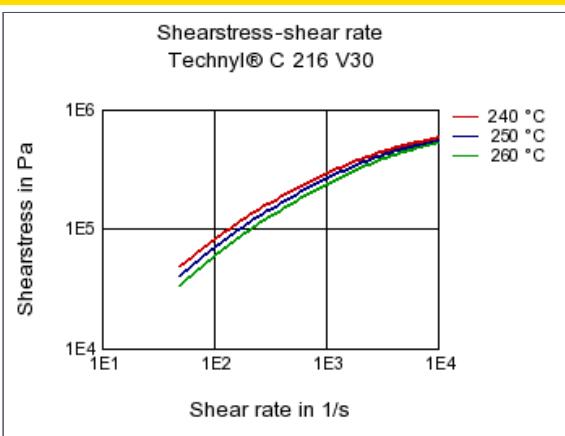

## Stress-strain

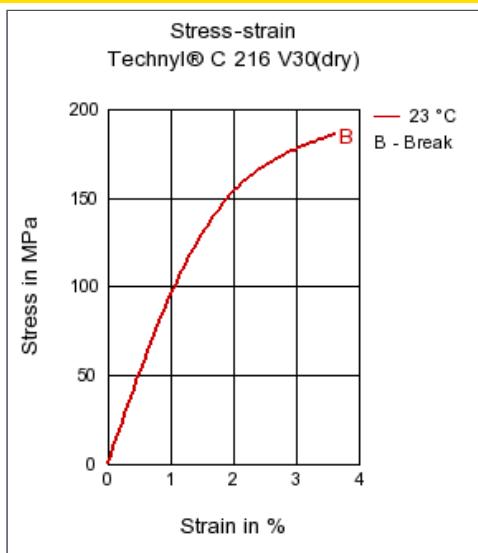

## Stress-strain

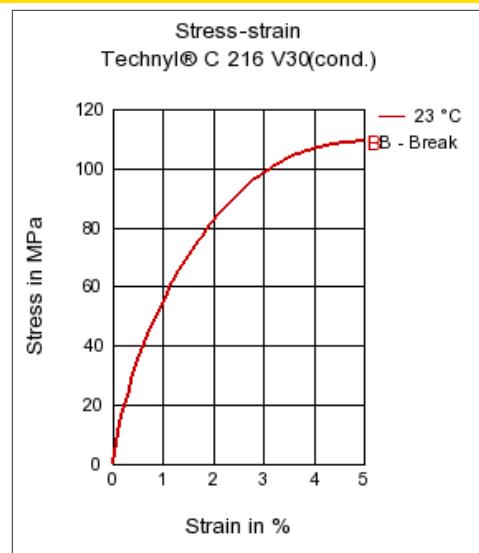

## Characteristics

## Processing

Injection Molding

## Other text information

## Injection Molding

PROCESSING

Melt temperature: 225°C

Mold temperature: 80°C

## Chemical Media Resistance

## Acids

- Acetic Acid (5% by mass) (23°C)
- Citric Acid solution (10% by mass) (23°C)
- Lactic Acid (10% by mass) (23°C)
- Hydrochloric Acid (36% by mass) (23°C)
- Nitric Acid (40% by mass) (23°C)
- Sulfuric Acid (38% by mass) (23°C)
- Sulfuric Acid (5% by mass) (23°C)
- Chromic Acid solution (40% by mass) (23°C)

**Bases**

-  Sodium Hydroxide solution (35% by mass) (23°C)
-  Sodium Hydroxide solution (1% by mass) (23°C)
-  Ammonium Hydroxide solution (10% by mass) (23°C)

**Alcohols**

-  Isopropyl alcohol (23°C)
-  Methanol (23°C)
-  Ethanol (23°C)

**Hydrocarbons**

-  n-Hexane (23°C)
-  Toluene (23°C)
-  iso-Octane (23°C)

**Ketones**

-  Acetone (23°C)

**Ethers**

-  Diethyl ether (23°C)

**Mineral oils**

-  SAE 10W40 multigrade motor oil (23°C)

**Standard Fuels**

-  Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)

**Salt solutions**

-  Zinc Chloride solution (50% by mass) (23°C)

**Other**

-  Ethylene Glycol (50% by mass) in water (108°C)
-  50% Oleic acid + 50% Olive Oil (23°C)
-  Water (23°C)
-  Deionized water (90°C)