


Technyl® C 246M

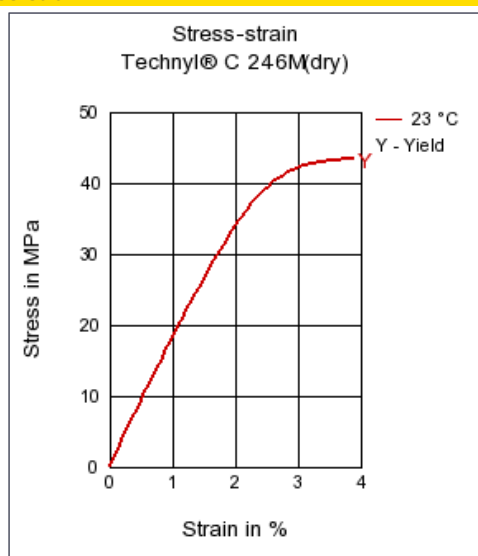
PA6

Solvay Engineering Plastics

Product Texts

Polyamide 6, unreinforced, with high impact resistance for injection moulding

Mechanical properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	2000 / 1100	MPa	ISO 527-1/-2
Charpy notched impact strength (+23°C)	55 / -	kJ/m ²	ISO 179/1eA
Thermal properties			
ISO Data			
Melting temperature (10°C/min)	222 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	60 / *	°C	ISO 75-1/-2
Burning behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	1.6 / *	mm	IEC 60695-11-10
Electrical properties			
ISO Data			
Relative permittivity, 1MHz	3.5 / 4	-	IEC 60250
Dissipation factor, 1MHz	200 / -	E-4	IEC 60250
Volume resistivity	>1E13 / 1E11	Ohm*m	IEC 60093
Surface resistivity	* / 1E11	Ohm	IEC 60093
Electric strength	- / 18	kV/mm	IEC 60243-1
Other properties			
ISO Data			
Density	1080 / -	kg/m ³	ISO 1183

Diagrams
Stress-strain

Characteristics
Processing

Injection Molding

Other text information

Injection Molding**PROCESSING**

Melt temperature: 220°C

Mold temperature: 50°C

Chemical Media Resistance**Acids**

-  Acetic Acid (5% by mass) (23°C)
-  Citric Acid solution (10% by mass) (23°C)
-  Lactic Acid (10% by mass) (23°C)
-  Hydrochloric Acid (36% by mass) (23°C)
-  Nitric Acid (40% by mass) (23°C)
-  Sulfuric Acid (38% by mass) (23°C)
-  Sulfuric Acid (5% by mass) (23°C)
-  Chromic Acid solution (40% by mass) (23°C)

Bases

-  Sodium Hydroxide solution (35% by mass) (23°C)
-  Sodium Hydroxide solution (1% by mass) (23°C)
-  Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

-  Isopropyl alcohol (23°C)
-  Methanol (23°C)
-  Ethanol (23°C)

Hydrocarbons

-  n-Hexane (23°C)
-  Toluene (23°C)
-  iso-Octane (23°C)

Ketones

-  Acetone (23°C)

Ethers

-  Diethyl ether (23°C)

Mineral oils

-  SAE 10W40 multigrade motor oil (23°C)

Standard Fuels

-  Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
-  Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)

Salt solutions

-  Zinc Chloride solution (50% by mass) (23°C)

Other

-  Ethylene Glycol (50% by mass) in water (108°C)
-  50% Oleic acid + 50% Olive Oil (23°C)
-  Water (23°C)
-  Deionized water (90°C)