



Technylstar™ S 218 V30

PA6-GF30

Solvay Engineering Plastics

Product Texts

Technylstar Polyamide, reinforced with 30% of glass fibre Characterized by high fluidity of the melt.

Mechanical properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	9600 / 6200	MPa	ISO 527-1/-2
Stress at break	180 / -	MPa	ISO 527-1/-2
Strain at break	3.2 / -	%	ISO 527-1/-2
Charpy impact strength (+23°C)	81 / -	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	11 / -	kJ/m ²	ISO 179/1eA

Thermal properties


ISO Data	dry / cond	Unit	Test Standard
Melting temperature (10°C/min)	222 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	205 / *	°C	ISO 75-1/-2

Other properties


ISO Data	dry / cond	Unit	Test Standard
Water absorption	0.95 / *	%	Sim. to ISO 62
Density	1340 / -	kg/m ³	ISO 1183

Diagrams


Viscosity-shear rate

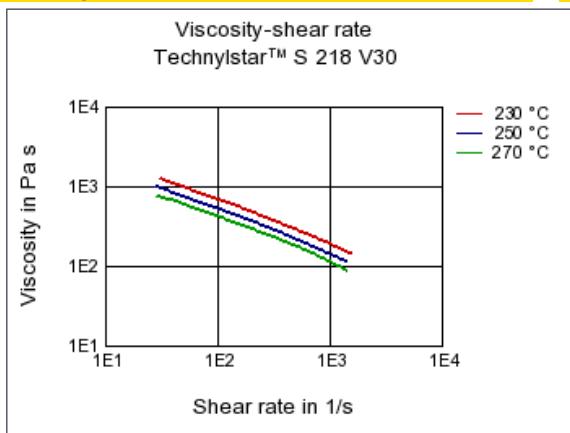

Shearstress-shear rate

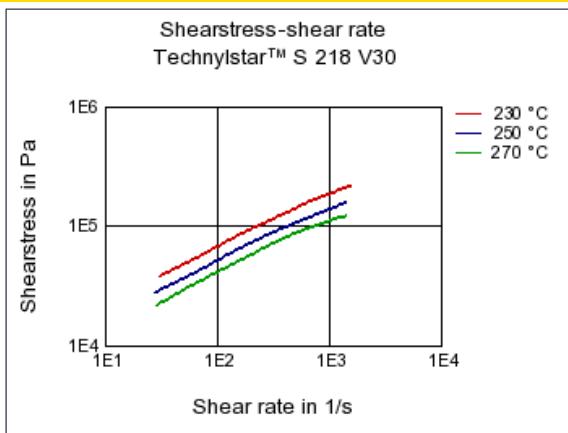

Stress-strain

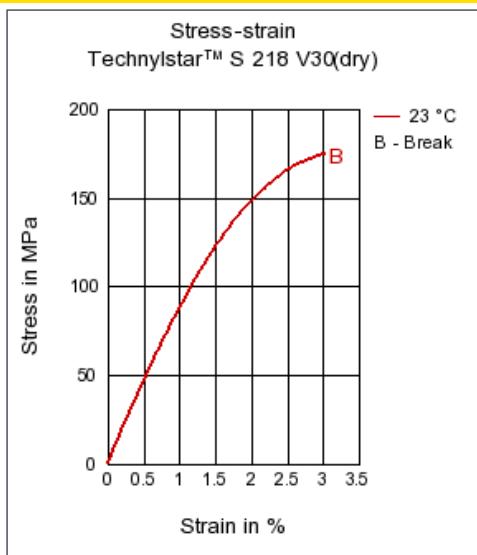

Characteristics

Processing

Injection Molding

Other text information

Injection Molding

PROCESSING

Melt temperature: 220°C

Mold temperature: 80°C

Chemical Media Resistance

Acids

- Acetic Acid (5% by mass) (23°C)
- Citric Acid solution (10% by mass) (23°C)
- Lactic Acid (10% by mass) (23°C)
- Hydrochloric Acid (36% by mass) (23°C)
- Nitric Acid (40% by mass) (23°C)
- Sulfuric Acid (38% by mass) (23°C)
- Sulfuric Acid (5% by mass) (23°C)
- Chromic Acid solution (40% by mass) (23°C)

Bases

- Sodium Hydroxide solution (35% by mass) (23°C)
- Sodium Hydroxide solution (1% by mass) (23°C)
- Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- Isopropyl alcohol (23°C)
- Methanol (23°C)
- Ethanol (23°C)

Hydrocarbons

- n-Hexane (23°C)
- Toluene (23°C)
- iso-Octane (23°C)

Ketones

 Acetone (23°C)

Ethers

 Diethyl ether (23°C)

Mineral oils

 SAE 10W40 multigrade motor oil (23°C)

Standard Fuels

 Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)

 Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)

Salt solutions

 Zinc Chloride solution (50% by mass) (23°C)

Other

 Ethylene Glycol (50% by mass) in water (108°C)

 50% Oleic acid + 50% Olive Oil (23°C)

 Water (23°C)

 Deionized water (90°C)