

**Technyl® B 216 Nat D**

PA666

Solvay Engineering Plastics

Product Texts

Unreinforced copolyamide 666, medium viscosity, for injection moulding.

TECHNYL B 216 offers an excellent combination between impact resistance, rigidity, thermal resistance and surface appearance. It is used in a wide variety of industries (electrical, automotive). This grade is particularly suitable for moulding perfume bottles which require a good scratch resistance.

This product is available in a wide range of colours.

Mechanical properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	3000 / 1100	MPa	ISO 527-1/-2
Yield stress	85 / 50	MPa	ISO 527-1/-2
Yield strain	3.6 / 25	%	ISO 527-1/-2
Nominal strain at break	30 / -	%	ISO 527-1/-2
Charpy impact strength (+23°C)	N / N	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	5 / 16	kJ/m ²	ISO 179/1eA
Thermal properties			
ISO Data			
Melting temperature (10°C/min)	242 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	67 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	210 / *	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	70 / *	E-6/K	ISO 11359-1/-2
Burning behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	1.5 / *	mm	IEC 60695-11-10
Oxygen index	23 / *	%	ISO 4589-1/-2
Electrical properties			
ISO Data			
Relative permittivity, 100Hz	4.3 / 9	-	IEC 60250
Relative permittivity, 1MHz	3 / 3.2	-	IEC 60250
Dissipation factor, 100Hz	100 / 1000	E-4	IEC 60250
Dissipation factor, 1MHz	300 / -	E-4	IEC 60250
Volume resistivity	1E13 / 1E11	Ohm*m	IEC 60093
Surface resistivity	* / 1E13	Ohm	IEC 60093
Electric strength	26 / 24	kV/mm	IEC 60243-1
Comparative tracking index	600 / -	-	IEC 60112
Other properties			
ISO Data			
Water absorption	1.6 / *	%	Sim. to ISO 62
Humidity absorption	2.8 / *	%	Sim. to ISO 62
Density	1140 / -	kg/m ³	ISO 1183


Technyl® B 216 Nat D

PA666


Solvay Engineering Plastics

Diagrams


Viscosity-shear rate

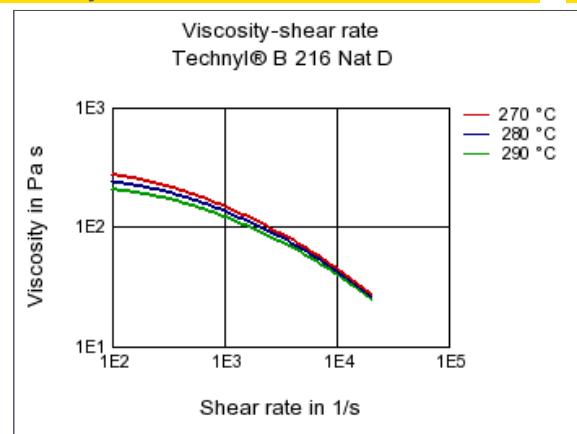

Shearstress-shear rate

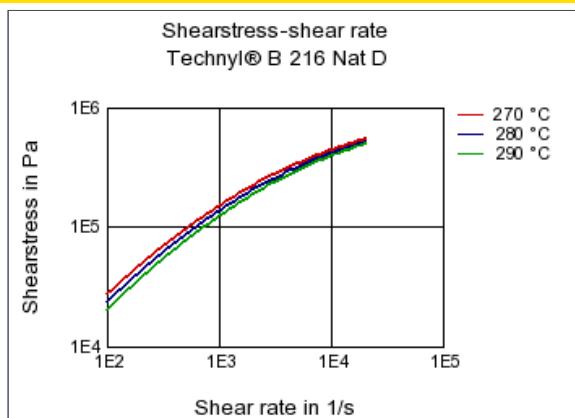

Stress-strain

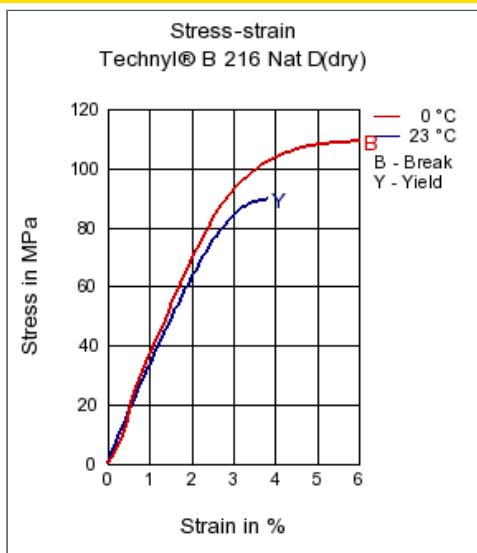

Characteristics

Processing

Injection Molding

Other text information

Injection Molding

The material is supplied in airtight bags, ready for use. In the case that the virgin material has absorbed moisture, it must be dried to a final moisture content of less than 0.2% with a dehumidified air drying equipment at approx 80°C.

Recommended moulding conditions:

Barrel temperatures:

- feed zone 250 - 260°C
- compression zone 260 - 270°C
- front zone 270 - 280°C

Mould temperatures: 60 at 80°C

Chemical Media Resistance

Acids

Acetic Acid (5% by mass) (23°C)

Created: 2015-08-17 Source: www.materialdatacenter.com

Our product information and suggestions are based on analyses, empirical values, and data from the product manufacturer in question and are therefore provided with our best knowledge and accountability. We do not, however, assume any liability or warranty, be it for defects in title, quality and suitability of the products for a specific purpose, or non-infringement of industrial property rights. We do not warrant the use or processing of the products and information, or consequences of any kind arising from product descriptions, suggestions, and recommendations. The responsibility for appropriate usage, as well as final suitability testing of the raw material is exclusively the responsibility of the customer as part of sampling/final qualification of a manufactured molded part. The specified data are only indicative and are not to be interpreted as legally binding specifications.

Page: 2/3

-  Citric Acid solution (10% by mass) (23°C)
-  Lactic Acid (10% by mass) (23°C)
-  Hydrochloric Acid (36% by mass) (23°C)
-  Nitric Acid (40% by mass) (23°C)
-  Sulfuric Acid (38% by mass) (23°C)
-  Sulfuric Acid (5% by mass) (23°C)
-  Chromic Acid solution (40% by mass) (23°C)

Bases

-  Sodium Hydroxide solution (35% by mass) (23°C)
-  Sodium Hydroxide solution (1% by mass) (23°C)
-  Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

-  Isopropyl alcohol (23°C)
-  Methanol (23°C)
-  Ethanol (23°C)

Hydrocarbons

-  n-Hexane (23°C)
-  Toluene (23°C)
-  iso-Octane (23°C)

Ketones

-  Acetone (23°C)

Ethers

-  Diethyl ether (23°C)

Mineral oils

-  SAE 10W40 multigrade motor oil (23°C)

Standard Fuels

-  Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)

Salt solutions

-  Zinc Chloride solution (50% by mass) (23°C)

Other

-  Ethylene Glycol (50% by mass) in water (108°C)
-  50% Oleic acid + 50% Olive Oil (23°C)
-  Water (23°C)
-  Deionized water (90°C)