

**XANTAR® G4F 22 UR**

PC-GF20 FR

Mitsubishi Engineering-Plastics Corporation

**Product Texts**

20% Glass Reinforced, Flame Retardant, UV Stabilized

ISO 1043 PC-GF20 FR

[XANTAR® Polycarbonate & Blends, your global partner for innovative added value](#)

Rheological properties	Value	Unit	Test Standard
<b>ISO Data</b>			
Melt volume-flow rate, MVR	8	cm <sup>3</sup> /10min	ISO 1133
Temperature	300	°C	ISO 1133
Load	1.2	kg	ISO 1133
Molding shrinkage, parallel	0.2	%	ISO 294-4, 2577
Molding shrinkage, normal	0.5	%	ISO 294-4, 2577
<b>Mechanical properties</b>			
<b>ISO Data</b>			
Tensile Modulus	6000	MPa	ISO 527-1/-2
Stress at break	90	MPa	ISO 527-1/-2
Strain at break	4	%	ISO 527-1/-2
<b>Thermal properties</b>			
<b>ISO Data</b>			
Temp. of deflection under load (1.80 MPa)	145	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	150	°C	ISO 306
Coeff. of linear therm. expansion, parallel	25	E-6/K	ISO 11359-1/-2
Burning behav. at 1.5 mm nom. thickn.	V-0	class	IEC 60695-11-10
Thickness tested	1.5	mm	IEC 60695-11-10
UL recognition	UL	-	-
Burning behav. at thickness h	V-0	class	IEC 60695-11-10
Thickness tested	1.2	mm	IEC 60695-11-10
UL recognition	UL	-	-
Oxygen index	35	%	ISO 4589-1/-2
<b>Electrical properties</b>			
<b>ISO Data</b>			
Relative permittivity, 100Hz	3.25	-	IEC 60250
Relative permittivity, 1MHz	3.2	-	IEC 60250
Dissipation factor, 100Hz	9	E-4	IEC 60250
Dissipation factor, 1MHz	90	E-4	IEC 60250
Volume resistivity	>1E13	Ohm*m	IEC 60093
Surface resistivity	>1E15	Ohm	IEC 60093
Electric strength	29	kV/mm	IEC 60243-1
Comparative tracking index	200	-	IEC 60112
<b>Other properties</b>			
<b>ISO Data</b>			
Water absorption	0.29	%	Sim. to ISO 62
Density	1350	kg/m <sup>3</sup>	ISO 1183
<b>Rheological calculation properties</b>			
<b>ISO Data</b>			
Density of melt	1170	kg/m <sup>3</sup>	-
Thermal conductivity of melt	0.29	W/(m K)	-

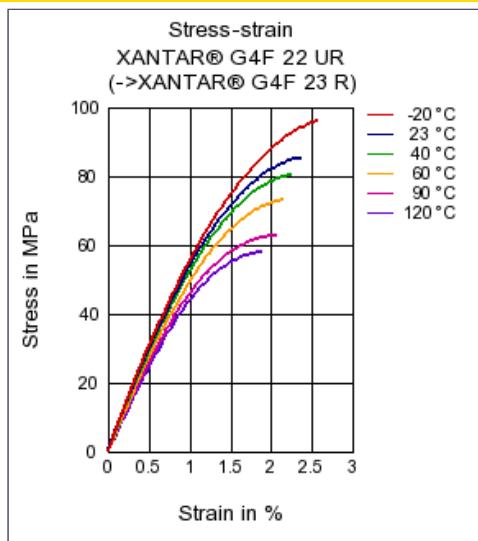
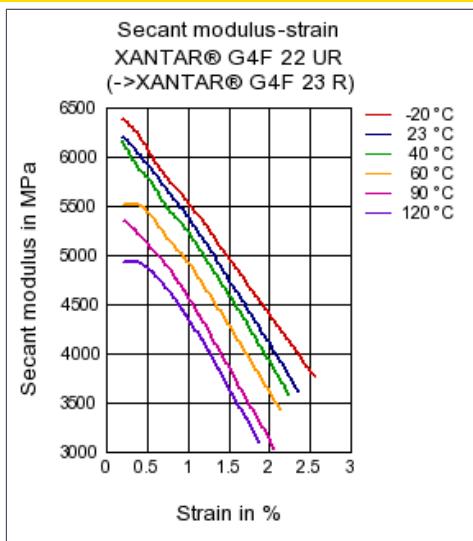
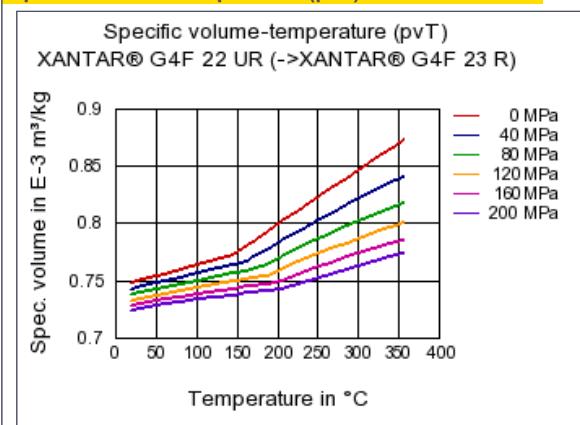
**XANTAR® G4F 22 UR**

PC-GF20 FR

Mitsubishi Engineering-Plastics Corporation

Spec. heat capacity of melt	1530	J/(kg K)	-
Eff. thermal diffusivity	1.62E-7	m <sup>2</sup> /s	-
Ejection temperature	134	°C	-

Test specimen production	Value	Unit	Test Standard
<b>ISO Data</b>			
Injection Molding, melt temperature	300	°C	ISO 294
Injection Molding, mold temperature	100	°C	ISO 10724

**Diagrams****Stress-strain****Secant modulus-strain****Specific volume-temperature (pvT)****Characteristics****Processing**

Injection Molding

**Additives**

Release agent

**Delivery form**

Pellets

**Special Characteristics**

Flame retardant, Light stabilized or stable to light, U.V. stabilized or stable to weather, Heat stabilized or stable to heat

**Other text information****Injection Molding****Injection Molding Recommendations**

**Chemical Media Resistance****Acids**

-  Acetic Acid (5% by mass) (23°C)
-  Citric Acid solution (10% by mass) (23°C)
-  Lactic Acid (10% by mass) (23°C)
-  Hydrochloric Acid (36% by mass) (23°C)
-  Nitric Acid (40% by mass) (23°C)
-  Sulfuric Acid (38% by mass) (23°C)
-  Sulfuric Acid (5% by mass) (23°C)
-  Chromic Acid solution (40% by mass) (23°C)

**Bases**

-  Sodium Hydroxide solution (35% by mass) (23°C)
-  Sodium Hydroxide solution (1% by mass) (23°C)
-  Ammonium Hydroxide solution (10% by mass) (23°C)

**Alcohols**

-  Isopropyl alcohol (23°C)
-  Methanol (23°C)
-  Ethanol (23°C)

**Hydrocarbons**

-  n-Hexane (23°C)
-  Toluene (23°C)
-  iso-Octane (23°C)

**Ketones**

-  Acetone (23°C)

**Ethers**

-  Diethyl ether (23°C)

**Salt solutions**

-  Sodium Chloride solution (10% by mass) (23°C)
-  Sodium Hypochlorite solution (10% by mass) (23°C)
-  Sodium Carbonate solution (20% by mass) (23°C)
-  Sodium Carbonate solution (2% by mass) (23°C)
-  Zinc Chloride solution (50% by mass) (23°C)

**Other**

-  Ethyl Acetate (23°C)
-  Hydrogen peroxide (23°C)
-  Water (23°C)
-  Phenol solution (5% by mass) (23°C)