





XANTAR® G8F 23 R			
PC-GF40 FR		Mitsubishi Engineering-Plastics Corporation	
Product Texts			
40% Glass Reinforced, Flame Retardant			
ISO 1043 PC-GF40 FR			
XANTAR® Polycarbonate & Blends, your global partner for innovative added value			
Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	3	cm ³ /10min	ISO 1133
Temperature	300	°C	ISO 1133
Load	1.2	kg	ISO 1133
Molding shrinkage, parallel	0.1	%	ISO 294-4, 2577
Molding shrinkage, normal	0.3	%	ISO 294-4, 2577
Mechanical properties	Value	Unit	Test Standard
ISO Data			
Tensile Modulus	10500	MPa	ISO 527-1/-2
Stress at break	135	MPa	ISO 527-1/-2
Strain at break	1.5	%	ISO 527-1/-2
Thermal properties	Value	Unit	Test Standard
ISO Data			
Temp. of deflection under load (1.80 MPa)	145	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	153	°C	ISO 306
Coeff. of linear therm. expansion, parallel	20	E-6/K	ISO 11359-1/-2
Burning behav. at 1.5 mm nom. thickn.	V-0	class	IEC 60695-11-10
Thickness tested	1.5	mm	IEC 60695-11-10
UL recognition	UL	-	-
Burning behav. at thickness h	V-0	class	IEC 60695-11-10
Thickness tested	3.0	mm	IEC 60695-11-10
UL recognition	UL	-	-
Oxygen index	37	%	ISO 4589-1/-2
Electrical properties	Value	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	3.4	-	IEC 60250
Relative permittivity, 1MHz	3.4	-	IEC 60250
Dissipation factor, 100Hz	9	E-4	IEC 60250
Dissipation factor, 1MHz	90	E-4	IEC 60250
Volume resistivity	>1E13	Ohm*m	IEC 60093
Surface resistivity	>1E15	Ohm	IEC 60093
Electric strength	29	kV/mm	IEC 60243-1
Comparative tracking index	200	-	IEC 60112
Other properties	Value	Unit	Test Standard
ISO Data			
Water absorption	0.23	%	Sim. to ISO 62
Density	1520	kg/m ³	ISO 1183
Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	300	°C	ISO 294
Injection Molding, mold temperature	100	°C	ISO 10724

Diagrams

Stress-strain

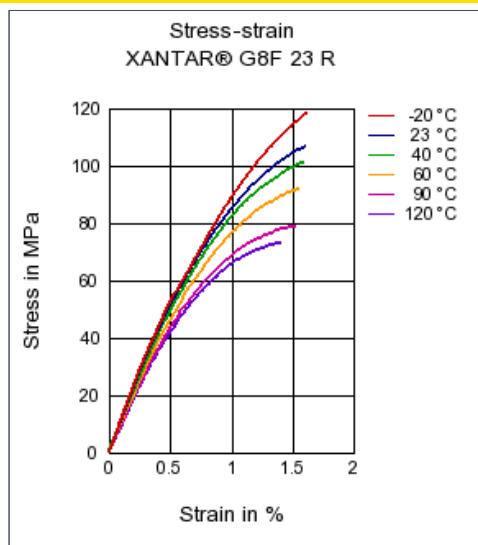

Secant modulus-strain

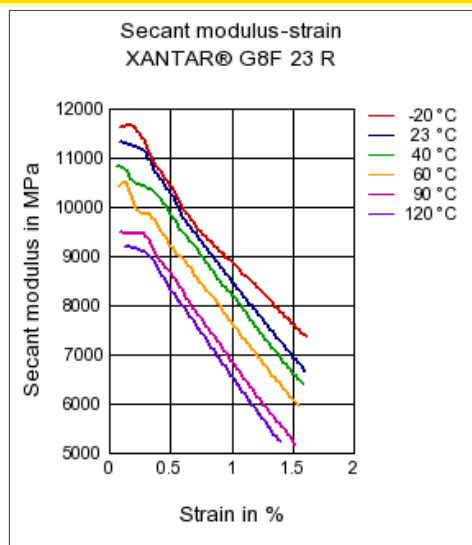

Characteristics

Processing

Injection Molding

Additives

Release agent

Delivery form

Pellets

Special Characteristics

Flame retardant, Heat stabilized or stable to heat

Other text information

Injection Molding

[Injection Molding Recommendations](#)

Chemical Media Resistance

Acids

- ☺ Acetic Acid (5% by mass) (23°C)
- ☺ Citric Acid solution (10% by mass) (23°C)
- ☺ Lactic Acid (10% by mass) (23°C)
- ☹ Hydrochloric Acid (36% by mass) (23°C)
- ☹ Nitric Acid (40% by mass) (23°C)
- ☹ Sulfuric Acid (38% by mass) (23°C)
- ☺ Sulfuric Acid (5% by mass) (23°C)
- ☺ Chromic Acid solution (40% by mass) (23°C)

Bases

- ☹ Sodium Hydroxide solution (35% by mass) (23°C)
- ☹ Sodium Hydroxide solution (1% by mass) (23°C)
- ☹ Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- ☺ Isopropyl alcohol (23°C)
- ☹ Methanol (23°C)
- ☺ Ethanol (23°C)


Hydrocarbons

- ☺ n-Hexane (23°C)
- ☹ Toluene (23°C)
- ☺ iso-Octane (23°C)






Ketones

 Acetone (23°C)





Ethers

 Diethyl ether (23°C)

Salt solutions

-  Sodium Chloride solution (10% by mass) (23°C)
-  Sodium Hypochlorite solution (10% by mass) (23°C)
-  Sodium Carbonate solution (20% by mass) (23°C)
-  Sodium Carbonate solution (2% by mass) (23°C)
-  Zinc Chloride solution (50% by mass) (23°C)

Other

-  Ethyl Acetate (23°C)
-  Hydrogen peroxide (23°C)
-  Water (23°C)
-  Phenol solution (5% by mass) (23°C)