

**XANTAR® G8F 23 UR**

PC-GF40 FR

Mitsubishi Engineering-Plastics Corporation

Product Texts

40% Glass Reinforced, Flame Retardant, UV Stabilized


ISO 1043 PC-GF40 FR

[XANTAR® Polycarbonate & Blends, your global partner for innovative added value](#)


Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	3	cm ³ /10min	ISO 1133
Temperature	300	°C	ISO 1133
Load	1.2	kg	ISO 1133
Molding shrinkage, parallel	0.1	%	ISO 294-4, 2577
Molding shrinkage, normal	0.3	%	ISO 294-4, 2577
Mechanical properties			
ISO Data			
Tensile Modulus	10500	MPa	ISO 527-1/-2
Stress at break	135	MPa	ISO 527-1/-2
Strain at break	1.5	%	ISO 527-1/-2
Thermal properties			
ISO Data			
Temp. of deflection under load (1.80 MPa)	145	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	153	°C	ISO 306
Coeff. of linear therm. expansion, parallel	20	E-6/K	ISO 11359-1/-2
Burning behav. at 1.5 mm nom. thickn.	V-0	class	IEC 60695-11-10
Thickness tested	1.5	mm	IEC 60695-11-10
UL recognition	UL	-	-
Burning behav. at thickness h	V-0	class	IEC 60695-11-10
Thickness tested	3.0	mm	IEC 60695-11-10
UL recognition	UL	-	-
Oxygen index	37	%	ISO 4589-1/-2
Electrical properties			
ISO Data			
Relative permittivity, 100Hz	3.4	-	IEC 60250
Relative permittivity, 1MHz	3.4	-	IEC 60250
Dissipation factor, 100Hz	9	E-4	IEC 60250
Dissipation factor, 1MHz	90	E-4	IEC 60250
Volume resistivity	>1E13	Ohm*m	IEC 60093
Surface resistivity	>1E15	Ohm	IEC 60093
Electric strength	29	kV/mm	IEC 60243-1
Comparative tracking index	200	-	IEC 60112
Other properties			
ISO Data			
Water absorption	0.23	%	Sim. to ISO 62
Density	1520	kg/m ³	ISO 1183
Test specimen production			
ISO Data			
Injection Molding, melt temperature	300	°C	ISO 294
Injection Molding, mold temperature	100	°C	ISO 10724

Diagrams

Stress-strain

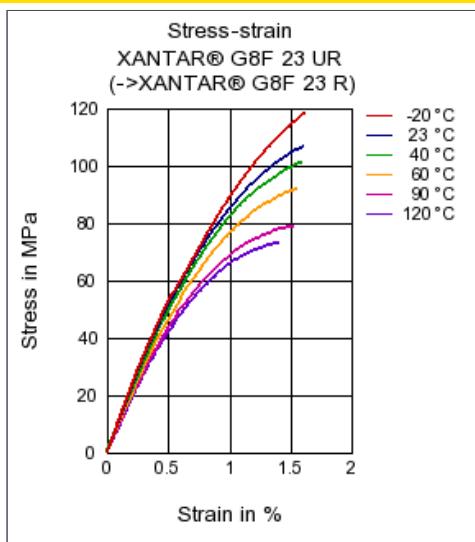

Secant modulus-strain

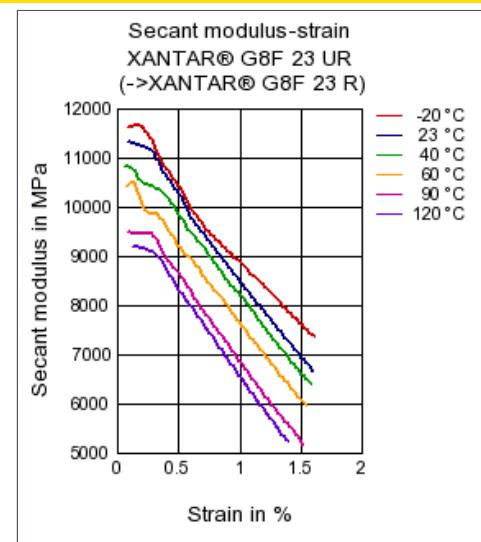

Characteristics

Processing

Injection Molding

Additives

Release agent

Delivery form

Pellets

Special Characteristics

Flame retardant, Light stabilized or stable to light, U.V. stabilized or stable to weather, Heat stabilized or stable to heat

Other text information

Injection Molding

[Injection Molding Recommendations](#)

Chemical Media Resistance

Acids

- Acetic Acid (5% by mass) (23°C)
- Citric Acid solution (10% by mass) (23°C)
- Lactic Acid (10% by mass) (23°C)
- Hydrochloric Acid (36% by mass) (23°C)
- Nitric Acid (40% by mass) (23°C)
- Sulfuric Acid (38% by mass) (23°C)
- Sulfuric Acid (5% by mass) (23°C)
- Chromic Acid solution (40% by mass) (23°C)

Bases

- Sodium Hydroxide solution (35% by mass) (23°C)
- Sodium Hydroxide solution (1% by mass) (23°C)
- Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- Isopropyl alcohol (23°C)
- Methanol (23°C)
- Ethanol (23°C)

Hydrocarbons

- n-Hexane (23°C)

-  Toluene (23°C)
-  iso-Octane (23°C)

Ketones

-  Acetone (23°C)

Ethers

-  Diethyl ether (23°C)

Salt solutions

-  Sodium Chloride solution (10% by mass) (23°C)
-  Sodium Hypochlorite solution (10% by mass) (23°C)
-  Sodium Carbonate solution (20% by mass) (23°C)
-  Sodium Carbonate solution (2% by mass) (23°C)
-  Zinc Chloride solution (50% by mass) (23°C)

Other

-  Ethyl Acetate (23°C)
-  Hydrogen peroxide (23°C)
-  Water (23°C)
-  Phenol solution (5% by mass) (23°C)