

PLEXIGLAS® Satinice df22 7H

PMMA

Evonik Industries AG

Product Texts
Productprofil:

PLEXIGLAS® Satinice df22 7H, based on PLEXIGLAS® 7H, is characterized by diffuse scattering of light.

Typical properties of PLEXIGLAS® molding compound are

- good flow
- high mechanical strength, surface hardness and mar resistance
- very good weather resistance.

Special properties of PLEXIGLAS® Satinice df22 7H are

- very good lightdiffusion combined with excellent light transmission
- matte surfaces can be obtained by varying the extrusion parameters.

Application:

Used for extruding profiles and sheets for lighting engineering applications

Example:

luminaire covers, displays, projection screens and similar lighting applications

Processing:

PLEXIGLAS® Satinice df22 7H can be processed on extruders with 3-zone general purpose screws for engineering thermoplastics.

The matte finish of profile surfaces depends very much on machine design (calibrating unit, polishing rolls) and cooling conditions. It can be enhanced by controlled temperature reduction.

Physical Form / Packaging:

PLEXIGLAS® Satinice df molding compounds are supplied as pellets of uniform size, packaged in 25kg polyethylene bags; other packaging on request.

Rheological properties	Value	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	1.1	cm ³ /10min	ISO 1133
Temperature	230	°C	ISO 1133
Load	3.8	kg	ISO 1133
Mechanical properties			
ISO Data			
Tensile Modulus	3400	MPa	ISO 527-1/-2
Stress at break	70	MPa	ISO 527-1/-2
Strain at break	6	%	ISO 527-1/-2
Charpy impact strength (+23°C)	20	kJ/m ²	ISO 179/1eU
Thermal properties			
ISO Data			
Glass transition temperature, 10°C/min	108	°C	ISO 11357-1/-2
Temp. of deflection under load (1.80 MPa)	97	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	101	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	105	°C	ISO 306
Coeff. of linear therm. expansion, parallel	63	E-6/K	ISO 11359-1/-2

PLEXIGLAS® Satinice df22 7H


PMMA

Evonik Industries AG


Electrical properties	Value	Unit	Test Standard
ISO Data			
Volume resistivity	>1E13	Ohm*m	IEC 60093
Surface resistivity	1E13	Ohm	IEC 60093
Other properties			
ISO Data	1190	kg/m ³	ISO 1183
Density	1190	kg/m ³	ISO 1183
Material specific properties			
ISO Data	86	%	ISO 13468-1, -2
Luminous transmittance	86	%	ISO 13468-1, -2
Test specimen production			
ISO Data	252	°C	ISO 294
Injection Molding, melt temperature	252	°C	ISO 294
Injection Molding, mold temperature	65	°C	ISO 10724
Injection Molding, injection velocity	195	mm/s	ISO 294

Diagrams


Viscosity-shear rate

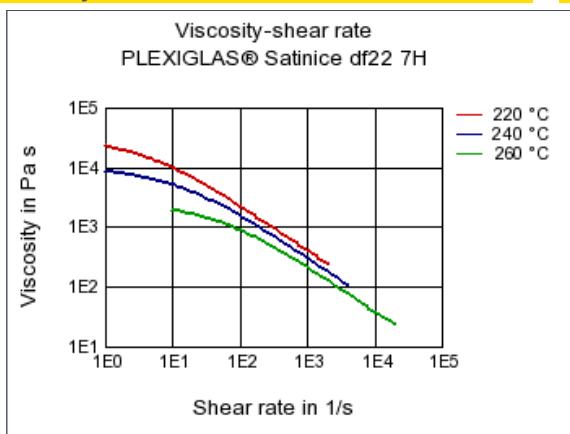


Shearstress-shear rate

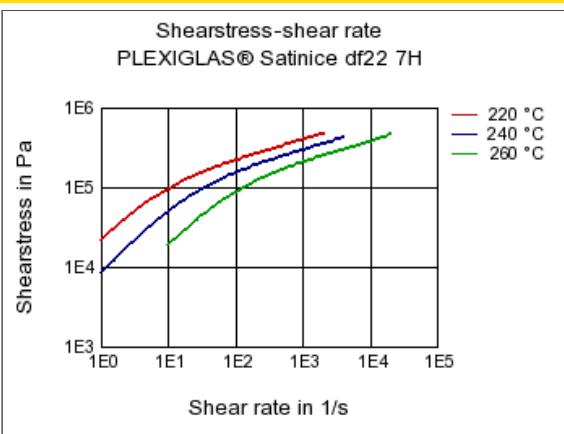

Dynamic Shear modulus-temperature

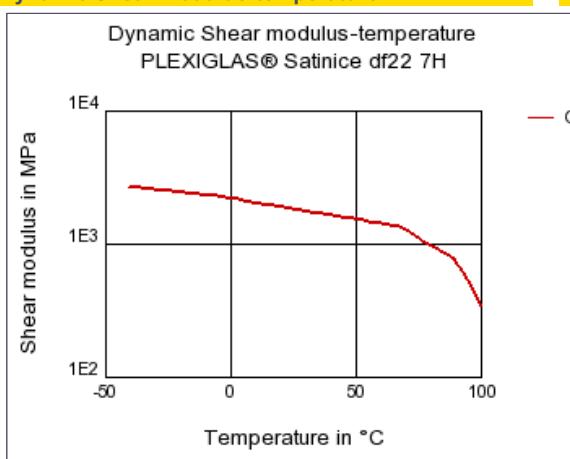

Stress-strain

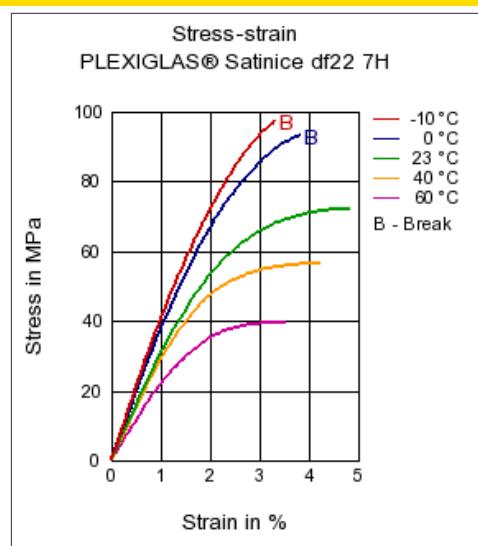


PLEXIGLAS® Satinice df22 7H


PMMA

Evonik Industries AG

Secant modulus-strain

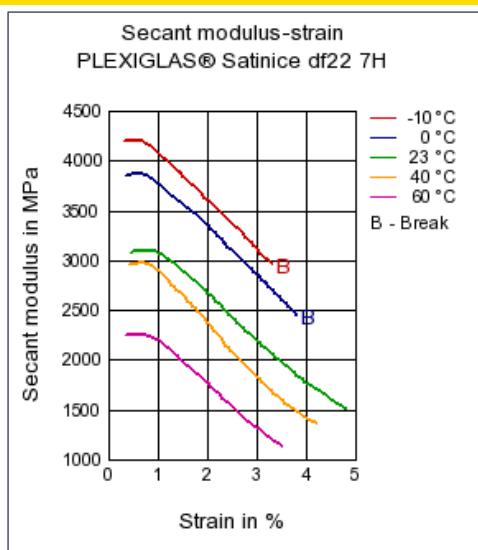

Tensile modulus-temperature

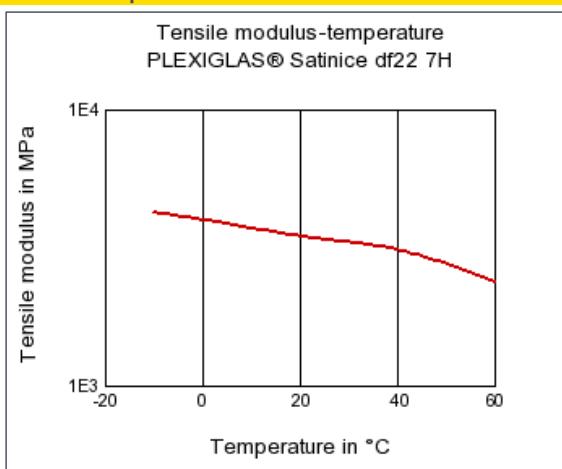

Characteristics

Processing

Profile Extrusion, Sheet Extrusion, Other Extrusion

Additives

Release agent

Delivery form

Pellets

Special Characteristics

Light stabilized or stable to light, U.V. stabilized or stable to weather

Other text information

Profile extrusion

PREPROCESSING

Predrying temperature: max. 95 °C

Predrying time in a desiccant-type drier: 2 - 3 h

PROCESSING

Melt temperature: 220 - 260 °C

Die temperature: 220 - 260 °C

Sheet extrusion

PREPROCESSING

Predrying temperature: max. 95 °C

Predrying time in a desiccant-type drier: 2 - 3 h

PROCESSING

Melt temperature: 220 - 260 °C

Die temperature: 220 - 260 °C

Chemical Media Resistance

Acids

- 😊 Acetic Acid (5% by mass) (23°C)
- 😊 Citric Acid solution (10% by mass) (23°C)
- 😊 Lactic Acid (10% by mass) (23°C)
- 😊 Sulfuric Acid (38% by mass) (23°C)
- 😊 Sulfuric Acid (5% by mass) (23°C)

Bases

- 😊 Sodium Hydroxide solution (35% by mass) (23°C)
- 😊 Sodium Hydroxide solution (1% by mass) (23°C)
- 😊 Ammonium Hydroxide solution (10% by mass) (23°C)

Hydrocarbons

- 😊 n-Hexane (23°C)

PLEXIGLAS® Satinice df22 7H

PMMA

Evonik Industries AG

-  iso-Octane (23°C)

Standard Fuels

-  Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
-  Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (23°C)

Salt solutions

-  Sodium Carbonate solution (20% by mass) (23°C)
-  Sodium Carbonate solution (2% by mass) (23°C)

Other

-  50% Oleic acid + 50% Olive Oil (23°C)
-  Water (23°C)