



Grilamid TR

Clear Choice in Transparent Polyamides

EMS
EMS-GRIVORY

Contents

3 Introduction

Grilamid TR

Clear Choice

4 Key Property Comparison

5 Stress Crack Resistance

6 Sterilization Resistance

6 Agency and Regulatory Approvals

Product features

7 Grilamid TR HT 200

8 Grilamid TR HT 170

9 Grilamid TR ICR

10 Grilamid TR 90

11 Grilamid TR 55

12 Grilamid TR 30

13 Grilamid BTR

14 Grilamid TR Reinforced

Special Feature

14 Grilamid TR in Diffused Lighting

14 Grilamid TR in Multi-Material Designs

Material Properties

15 Grilamid TR Assortment

16 Grilamid TR Reinforced Grades

17 Masterbatches

18 EMS-GRIVORY Service and Support

Introduction

Grilamid TR is the trade name for EMS-GRIVORY's family of amorphous polyamides based on cycloaliphatic and aromatic blocks. Careful selection of the monomers results in stellar transparency threaded in the family's DNA.

Grilamid TR product line combines optical clarity with high-performance attributes:

- Brilliant transparency
- Excellent fatigue resistance
- Superior dynamic strength
- High chemical resistance
- Extraordinary environmental stress crack resistance (ESCR)
- Low specific gravity
- Minimal water absorption
- Long-term thermal stability
- Barrier resistance to O₂, N₂, and CO₂
- High impact strength at low temperatures
- Exceptional dimensional stability
- Outstanding resistance to weathering

Grilamid TR' robust properties succeed where other transparent polymers fail in achieving stringent requirements in optics, electronics, healthcare, safety, sanitary, household, sports, and automotive markets. Grilamid TR is a suitable fit in glass replacement applications. Reinforced Grilamid TR offers lightweight metal replacement options exhibiting high stiffness, high strength, low warpage, very low creep, high heat distortion temperatures, very low moisture absorption, and excellent surface appearance. Grilamid TR family's outstanding processability, versatility in production methods, vibrant colorization, and bold printability fosters creative design freedom.

Meet the Family:

- Grilamid TR 30 – The Scratch Resistant
- Grilamid TR 55 – The All Rounder
- Grilamid TR 90 – The Tough Guy
- Grilamid TR ICR – The ESCR Challenger
- Grilamid TR HT – The Hot Performer



The Clear Choice

Grilamid TR fits in between other amorphous thermoplastics balancing stiffness and heat distortion without compromising transparency.

Grilamid TR exhibits excellent resistance to UV, stress cracking, and chemicals compared to other transparent thermoplastic polymers.




Grilamid TR 30 resists stress cracking and yields high impact compared to acrylic polymers. Grilamid TR 55, Grilamid TR 30, and Grilamid TR HTs demonstrate higher heat deformation temperatures compared to acrylic polymers.



Crystal Clear Transparency

Chemical & Stress Crack Resistance

Grilamid TR®

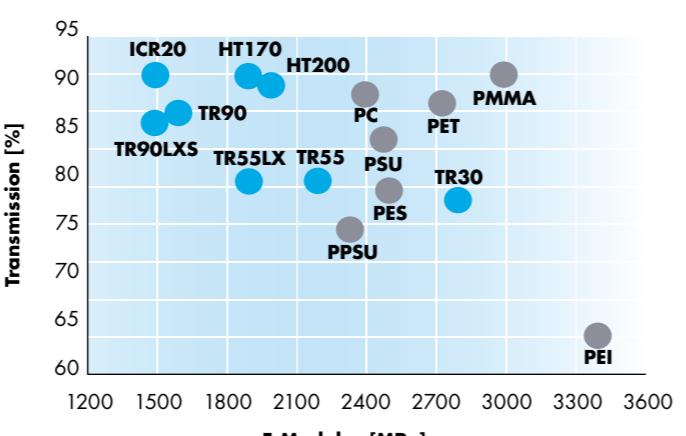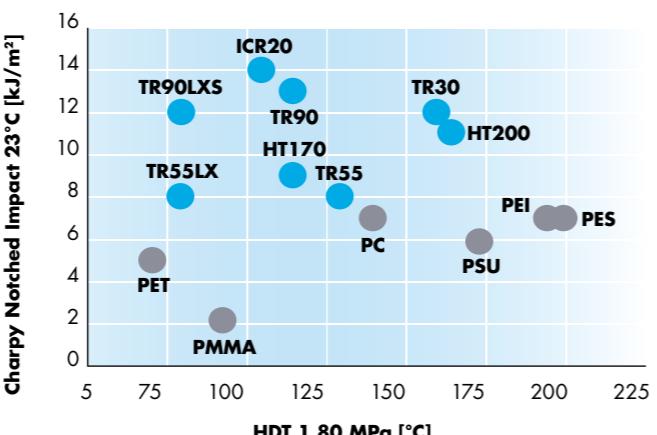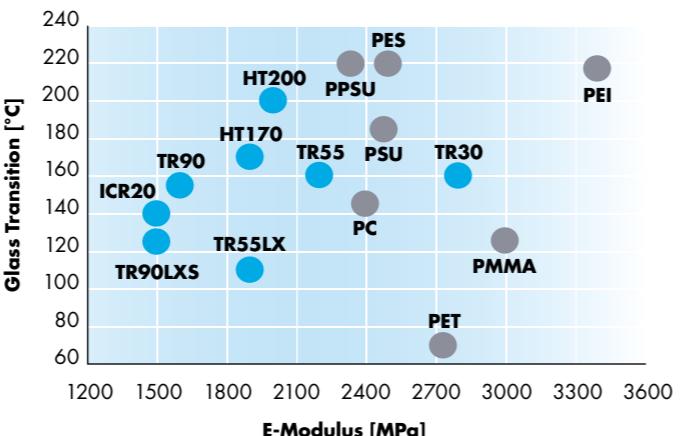

Transmission measured on 3 mm thick plates at 560 nm

Property Comparison

Grilamid TR demonstrates equal to elevated performance when comparing key properties such as transparency, chemical resistance, and processability to

amorphous thermoplastics such as polycarbonate (PC), polysulfone (PSU), polyethersulfone (PES), and polyetherimide (PEI).

Properties	TR 30	TR 55	TR 90	ICR 20	HT 170	HT 200	PC	PSU	PES	PEI
Transparency	●●●	●●●	●●●	●●●	●●●	●●●	●●●	○	○	○
Bisphenol A (BPA) Free	●●●	●●●	●●●	●●●	●●●	●●●	○	○	●●	●●
Bisphenol S (BPS) Free	●●●	●●●	●●●	●●●	●●●	●●●	●●	○	○	●●
Chemical Resistance	●●	●●	●●	●●●	●●	●●	○	●●	●●	●
Density	●	●●●	●●●	●	●●●	●●●	○	○	○	○
Waterresistance	○	●●	●●	●	●●●	●●●	●●	●●	●●	—
Steam Resistance	○	●	●	●	●●	●●●	●●	●●	●●	●
Bonding with Liquid Silicone Rubber (LSR)	●●	●●	●●	●	●●	●●●*	●	○	○	○
Processing	●●	●●	●●	●●	●●	●●	●●	○	○	○

- Very Good
- Good
- Satisfactory
- Poor

* Corona treatment recommended for improved bonding.

Stress Crack Resistance

Environmental stress cracking (ESC) is a failure mode where a material fractures, either partially or completely, from chemical exposure under stress. Most amorphous polymers demonstrate chemical resistance but fail under applied stresses. ESC resistance testing, based on DIN 53449, subjects the material to bending stress under a 1-minute solvent immersion at 23°C.

Chemical attack observed in the form of cracks, crazing, or other surface degradation mechanism indicates incompatibility for crucial applications. Grilamid TR exhibits better resistance to alcohol, ketone and aromatic solvents compared to polycarbonate (PC) and polyethylene terephthalate glycol (PETG).

Material	Grilamid TR 55		Grilamid TR 90		Grilamid TR ICR 20		Grilamid TR HT 200		PC		PETG	
Outer Fiber Strain [%]	1	3	1	3	1	3	1	3	1	3	1	3
90% Ethyl Alcohol	●●	○	●●	●●	●●●	●●●	●●●	●●●	●	●●	○	●●
90% Isopropyl Alcohol	●●	○	●●●	●●●	●●●	●●●	●●●	●●●	●●	●●	○	●●
Acetone	●●●	●●	●●●	●●●	●●●	●●●	●●●	●●●	●●	●●	○	●●
Butanone	●●●	●●	●●●	●●●	●●●	●●●	●●●	●●●	●●	●●	○	●●
Toluene	●●●	●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	●●●	○	○

●●● Resistant – no visible cracks, no change in surface appearance

●● Limited Resistance – small cracks visible, surface dissolves,

○ Not resistant – major cracks, very brittle

Sterilization Resistance

Sterilization is an important disinfectant process widely used in medical applications. It is gaining momentum in domestic sectors such as households, schools, restaurant, and stores. Sterilization methods require highly durable materials to withstand the destructive process.

Grilamid TR is resistant to damaging effects of rigorous sterilization methods such as ethylene oxide (EtO), gamma irradiation (40 kGy maximum), and hydrogen peroxide (54 minutes 50°C). Grilamid TR HT 200, designed specifically for steam sterilization, shows no deformation or clouding. Grilamid TR HT 170, designed for hot water steam resistance, is suitable for household applications.

Property	Grilamid TR 30	Grilamid TR 55	Grilamid TR HT 170	Grilamid TR 90	Grilamid TR HT 200
Ethylene Oxide (EtO)	<input checked="" type="checkbox"/>				
Gamma Irradiation, < 40 kGy	<input checked="" type="checkbox"/>				
Hydrogen Peroxide, 54 minutes 50°C	<input checked="" type="checkbox"/>				
Steam Sterilization Cycles, 18 minutes at 134°C	0	0	0	0	500
Cooking Steam Cycles, 75 minutes at 100°C	–	160	> 1000	–	–

Resistant Not Resistant – Not Applicable

Agency and Regulatory Approvals

Grilamid TR products hold approvals in medical, safety, food contact, water contact, and automotive markets. The following table summarizes approvals within

the different markets. Approvals are limited to specific product color, product modification, and agency specification.

Agency	Grilamid TR 30	Grilamid TR 55	Grilamid TR HT 170	Grilamid TR 90	Grilamid TR ICR 12	Grilamid TR HT 200	Grilamid TRV
EU Food Contact	<input checked="" type="checkbox"/>	–					
FDA Food Contact	<input checked="" type="checkbox"/>	ongoing*	–				
USP Class VI	–	<input checked="" type="checkbox"/>	–	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	–
ISO 10993	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	–	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	–
NSF 61 Water Contact	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	–	<input checked="" type="checkbox"/>	–	–	<input checked="" type="checkbox"/>
WRAS Water Contact	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	–	<input checked="" type="checkbox"/>	–	–	–
UL	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	–	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	–	<input checked="" type="checkbox"/>
Stellantis	<input checked="" type="checkbox"/>	–	–	<input checked="" type="checkbox"/>	–	–	–
Ford	–	<input checked="" type="checkbox"/>	–	–	–	–	–
GM	<input checked="" type="checkbox"/>	–	–	<input checked="" type="checkbox"/>	–	–	–

Compliant – Not Available

* Estimated completion is 2024

Product Features

Grilamid TR HT 200

Grilamid TR HT 200 is the steam sterilizable member of the Grilamid TR family. It is an ideal solution for applications demanding excellent performance under high heat environments while exhibiting other desirable properties:

- 200°C glass transition temperature
- Steam sterilizable at 134°C
- Excellent transparency after 500 steam cycles
- High chemical and stress crack resistance
- High heat distortion performance
- Permanent transparency
- Low moisture absorption
- Excellent scratch resistance
- Adhesion to LSR

Grilamid TR HT 200 is suitable for various application fields such as medical, domestic, industrial, sanitary, automotive, and electronics. Some applications include suction pump jars, anesthesia masks, forced respiration valves, sterilization machines, kitchen appliance parts, and polysulfone replacement.





Grilamid TR HT 170

Grilamid TR HT 170 is a modified Grilamid TR 55 with specialized design for use in hot water steam applications. Key properties of Grilamid TR HT 170 include:

- 170°C glass transition temperature
- Steam resistant up to 100°C
- High clarity after over 1000 steam cycles
- Good stress crack resistance
- Low moisture absorption
- Low weight and density
- Good impact performance
- Good processability

Grilamid TR HT 170 presents solutions in domestic, household, and medical applications such as baby bottles, cooker lids, and steam cooker housings. Grilamid TR HT 170 is also an all-rounder with properties desirable in all market segments.

Grilamid TR ICR

Grilamid TR ICR 12 LS and Grilamid TR ICR 20 are particularly stress-crack resistant members of the Grilamid TR family. Both are microcrystalline modifications of Grilamid TR 90 bringing together semi-crystalline and amorphous properties while maintaining high transparency. Grilamid TR ICR 12 LS offers improved stress crack resistance against nonpolar solvents and alcohols in addition to high UV resistance. Grilamid TR ICR 20 offers the best chemical and stress crack resistance, especially against alcohols, of the Grilamid TR family. Other key features of Grilamid TR ICR products include:

- High transparency and excellent surface quality
- Excellent flexural and fatigue strength
- High impact at subzero temperatures
- Ductile break behavior
- Excellent chemical resistance

Grilamid TR ICR 12 LS is suited for outdoor applications and filter bowls in sanitary, electrical, safety, domestic, engineering, and agricultural markets. Grilamid TR ICR 20 is suited for alcohol-resistant applications in optical and high flexibility applications in medical, sports, safety, and domestic markets.





Grilamid TR 90

Grilamid TR 90 is the tough guy of the Grilamid TR®-family. It takes the lead over other amorphous thermoplastics in performance and appearance. It meets rigorous requirements in demanding applications. Grilamid TR 90 elevates the standard for transparency while presenting a scroll of viable properties:

- Crystal clear, permanent transparency, very good impact strength
- Excellent chemical resistance
- Superb stress-crack resistance
- Exceptional toughness and stiffness
- Superior fatigue resistance
- Extraordinary strength in ultra-cold temperatures
- Medical, safety, food, and water approvals
- Unlimited color ability

Grilamid TR 90 modifications:

- LS – Easy processing and demoulding
- LXS – Improved alcohol resistance and easy processing, improved flow
- NZ – Improved impact performance
- NZZ – Extreme impact performance
- TL – Improved stiffness and stress crack resistance
- UV – Improved UV resistance

Grilamid TR 55

Grilamid TR 55 is the all-rounder member of the Grilamid TR family. It exhibits a balanced property profile fitting into many different applications across markets including medical, domestic, industrial, sanitary, automotive, and electronics. Grilamid TR 55 presents desirable attributes including:

- Outstanding transparency
- High toughness and stiffness
- Excellent stress crack resistance
- Good chemical resistance
- Medical, safety, food, and water approvals
- Unlimited color ability

Grilamid TR 55 modifications:

- LX – Improved alcohol resistance
- UV – UV resistance

Grilamid TR 55 is suitable for electrical connectors, sensor housings, fuel separators, lubricant containers, flow meters, foodstuff containers, and baby bottles.





Grilamid TR 30

Grilamid TR 30 is the member with the best scratch resistance of the Grilamid TR family. The Grilamid TR 30 structure is resulting in very high stiffness and very high surface hardness. Key features of Grilamid TR 30 coupled with excellent transparency include:

- Good impact strength
- Good chemical resistance especially against oil, grease, and fuels
- Good stress crack resistance
- Good scratch resistance
- High surface hardness

Grilamid® TR 30 modifications:

- TR 30 LS – Easy processing and demoulding
- TR XE 4139 – Improved heat resistance, UV resistance, and easy processing. Suitable for automotive interior components. Available in piano black color.

Grilamid TR 30 is the ideal solution for fuel filters, fuel separators, electrical covers, connectors, flow meters, and PMMA alternative for displays.

Grilamid BTR

EMS-GRIVORY GreenLine encompasses bio-based polyamides manufactured from renewable raw materials and contributes to the reduction of emission. The castor oil plant (*ricinus communis*) is the renewable resource for GreenLine products. The product's bio-content is the percent of total carbon determined in accordance with ASTM D 6866-12. Total emissions from GreenLine manufacturing process reduces environmental impact up to 75% compared to crude-oil based polyamides. GreenLine products retain the excellent properties of its respective family. Despite the use of renewable raw materials, GreenLine products are not biodegradable. Their durability is comparable to crude-oil based polyamides.

Grilamid BTR is the GreenLine representative of the Grilamid TR family with up to 54% bio-content. Key features include:

- High transparency
- High flexural fatigue strength and impact resistance
- Very good chemical resistance
- High gloss and excellent surface quality
- Improved melt flow and demolding properties



Grilamid TR Reinforced

The Grilamid TR portfolio offers a series of amorphous glass fiber reinforced products. Products exhibit excellent dimensional stability, low warpage, low flashing, minimal sinking, high heat distortion temperature, high stiffness and strength, high chemical resistance, surface quality, low moisture absorption, and excellent creep resistance.

Reinforced Grilamid TR is a top choice for high precision structural parts as well as an ideal solution to warpage and distortion occurrences in thin-walled parts.


Special Feature: Grilamid TR in Diffused Lighting

Special modifications of Grilamid TR 30 and Grilamid TR 90 tune the opacity and light diffusion properties into a softened glow desirable in ambient lighting applications.

Grilamid TR 30 based grades offer excellent scratch resistance, chemical resistance, and high stiffness. Grilamid TR 90 based grades maintain excellent UV resistance, low density, and excellent stress-crack resistance.

Special Feature: Grilamid TR in Multi-Material Designs

Grilamid TR products' versatility continues to multi-material components. The combination of complimentary EMS-GRIVORY grades presents a solution or enhancement in functional and structural applications. Best polymer-to-polymer adhesion combinations within the EMS-GRIVORY portfolio:

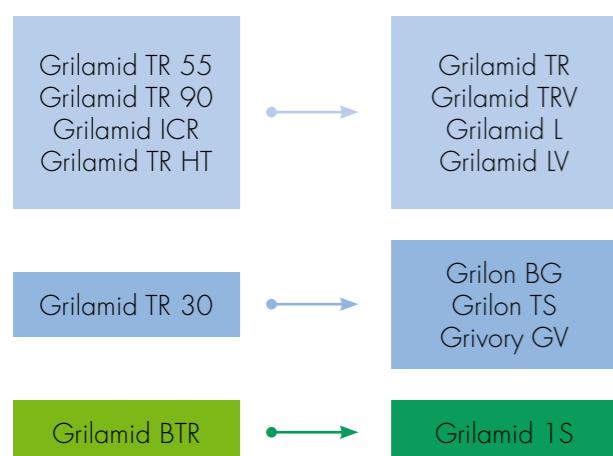

Material Properties Grilamid TR Assortment

Properties	Standard	Unit	TR 30 dry/cond.	TR 55 dry/cond.	TR 90 dry/cond.	BTR 600 LS dry/cond.	ICR 12 LS dry/cond.	ICR 20 dry/cond.	TR HT 170 dry/cond.	TR HT 200 dry/cond.
Tensile Modulus	ISO 527	MPa	/2800	2300/ 2200	1600/ 1600	1700/ 1700	1500/ 1500	1500/ 1500	/1900	2000/ 2000
Tensile Yield Stress	ISO 527	MPa	/90	80/75	60/60	65/65	60/60	60/60	/70	80/75
Tensile Yield Strain	ISO 527	MPa	/6	7/9	7/6	7/7	7/7	7/6	7/7	8/8
Charpy Notched Impact +23°C	ISO 179	kJ/m ²	/12	8/8	13/13	10/10	15/15	14/14	/9	7/11
Ball Indentation Hardness	ISO 2039-1	MPa	/160	130/ 120	95/90	120/ 110	100/ 100	100/ 95	/-	130/ 125
Glass Transition (10°C/min)	ISO 11357	°C	160/-	160/-	155/-	118/-	145/-	140/-	170/-	200/-
Heat Deflection 1.80 MPa	ISO 75	°C	125/-	130/-	115/-	90/-	105/-	105/-	130/-	165/-
Density	ISO 1183	g/cm ²	1.15/-	1.06/-	1.00/-	1.02/-	1.02/-	1.02/-	1.04/-	1.04/-
Water Absorption, 23°C	ISO 62	%	9.0/-	3.5/-	3.0/-	3.8/-	3.0/-	3.5/-	3.8/-	4.5/-
Moisture Absorption, 23°C/50%	ISO 62	%	3.5/-	1.5/-	1.5/-	1.8/-	1.5/-	1.5/-	1.5/-	1.7/-
Mold Shrinkage (Longitudinal)	ISO 294	%	0.65/-	0.60/-	0.65/-	0.45/-	0.65/-	0.65	0.60/-	0.60/-
Mold Shrinkage (Transverse)	ISO 294	%	0.70/-	0.70/-	0.75/-	0.50/-	0.70/-	0.75/-	0.70/-	0.90/-
Tool Temperature	-	°C	80 to 120	80 to 110	60 to 80	70 to 90	60 to 80	60 to 80	80 to 120	100 to 140
Processing Melt Range	-	°C	290 to 310	280 to 300	260 to 280	260 to 280	280 to 300	280 to 300	290 to 310	300 to 320



Material Properties

Grilamid TR Reinforced Grades

Properties	Standard	Unit	TRV-4X9	TRVX-50X9
Glass Content	ISO 3451	%	40	50
E-Modulus	ISO 527	MPa	10000/ 9000	13000/ 12500
Tensile Stress at break	ISO 527	MPa	130/130	170/160
Tensile Break Strain	ISO 527	MPa	3.5/2.0	2.0/2.0
Charpy Impact +23°C	ISO 179	kJ/m ²	65/45	65/65
Charpy Notched Impact +23°C	ISO 179 ISO 11357	kJ/m ²	14/14	16/16
Ball Indentation Hardness	ISO 2039-1	MPa	165/ 160	190/190
Glass Transition (10°C/min)	ISO 11357	°C	155/-	125/-
Heat Deflection 1.80 MPa	ISO 75	°C	135/-	115/-
Density	ISO 1183	g/cm ³	1.32/-	1.50/-
Water Absorption, 23°C	ISO 62	%	1.5/-	1.3/-
Moisture Absorption, 23°C/50%	ISO 62	%	0.8/-	0.6/-
Shrinkage (Longitudinal)	ISO 294	%	0.05/-	0.05/-
Shrinkage (Transverse)	ISO 294	%	0.40/-	0.15/-
Tool Temperature	-	°C	80 to 100	60 to 100
Processing Melt Range	-	°C	280 to 300	280 to 300



Masterbatches

Grilamid TR with masterbatches (MB) to enhance properties without adverse effects on mechanical proper-

ties. Table below lists the master batch for the associated application and base resin.

Grilamid TR Product	Application	Grilamid TR MB	Concentration [% w/w]
All Grilamid TR except TR 30 and TR 30 based grades	UV Stability	MB XE 3680	3 to 5
TR 30, TR 30 based grades	Natural Color Correction Agent	MB TR 30 Blue 4548	1 to 4
TR 30, TR 30 based grades	Demoulding and Flow Behavior	MB XE 4140	2 to 5
TR 30, TR 30 based grades	Heat and UV Stability	MB XE 4141	2 to 4
TR 55, TR 55 based grades, TR HT 170	Demoulding and Flow Behavior	MB 6960 LS	3 to 5
TR 55, TR 55 based grades, TR HT 170	Natural Color Correction Agent	MB TR 55 Blue 4545	2 to 5
TR 55, TR 55 based grades, TR HT 170	Natural Color Correction Agent*	MB TR 55 Violet 4516	1 to 2
TR 90, TR 90 based grades	Demoulding and Flow Behavior	MB 5032 LS	3 to 5
TR 90, TR 90 based grades	Natural Color Correction Agent	MB TR 90 Blue 4545	2 to 5
TR 90, TR 90 based grades	Natural Color Correction Agent*	MB TR 90 violet 4516	1 to 2
TR HT 200	Natural Color Correction Agent*	MB TR 60 Violet 4518	2 to 5
TR HT 200	Demoulding and Flow Behavior	MB XE 4034 LS	3 to 5

*FDA and EU Food Contact Compliant





You receive comprehensive technical support from our Application Development Center.

Service and Support

EMS-GRIVORY - Your development partner for innovative solutions

EMS-GRIVORY is global leader in the development and production of high-performance polymers. As a development partner, EMS provides support throughout the entire development process, from the initial idea to series production.

Ideas and solutions

Providing solutions and generating ideas, EMS develops innovative, cost-effective and sustainable applications together with the customer.

Individual material adaptations

EMS adapts materials precisely for specific applications and legal requirements, including customer-specific colors and test samples.

Simulation and optimization

Simulations are used to optimize component designs and injection molding processes, thus reducing costs and saving development time.

Environmentally-friendly solutions and sustainability

EMS attaches great importance to environmentally-friendly and sustainable production and provides a wide range of bio-based materials and recyclate. All production sites worldwide are CO₂-neutral.

Product characterization and approvals

Modern and extensively equipped test laboratories provide fast, targeted support for customer-specific applications and developments. Materials are approved worldwide for use in contact with food and drinking water, sanitary components and electrical appliances.

Series start-up and on-site support

EMS supports series start-up 24/7 on site for efficient production.

Global partner

With global production sites, on-site technical support and global application development centers, EMS provides uniformly high standards and service quality worldwide.



EMS as development partner





EMS-GRIVORY worldwide

EMS-GRIVORY – The leading manufacturer of high-performance polyamides

EMS-GRIVORY is the leading manufacturer of high-performance polyamides and the supplier with the widest range of polyamide materials. Our products are well-known throughout the world under the trademarks Grilamid, Grivory and Grilon.

EMS-GRIVORY Europe

Switzerland

EMS-CHEMIE AG
Business Unit EMS-GRIVORY Europe
Via Innovativa 1
7013 Domat/Ems
Switzerland
Phone +41 81 632 78 88
welcome@emsgrivory.com

Germany

EMS-CHEMIE (Deutschland) Vertriebs GmbH
Warthweg 14
64823 Gross-Umstadt
Germany
Phone +49 6078 783 0
Fax +49 6078 783 416
welcome@de.emsgrivory.com

France

EMS-CHEMIE (France) S.A.
Vélizy Espace, Immeuble Le Blériot
13 avenue Morane Saulnier
78140 Vélizy-Villacoublay
France
Phone +33 1 41 10 06 10
Fax +33 1 48 25 56 07
welcome@fr.emsgrivory.com

Great Britain

EMS-CHEMIE (UK) LTD
Forest Lodge
Dunston Business Village
Dunston
Stafford ST18 9AB
Great Britain
Phone +44 1785 283 734
Fax +44 1785 283 722
welcome@uk.emsgrivory.com

Italy

EMS-CHEMIE (Italia) S.r.l.
Via Carloni 56
22100 Como (CO)
Italy
Phone +39 011 0604522
Fax +39 011 0604522
welcome@it.emsgrivory.com

EMS-GRIVORY Asia

China

EMS-CHEMIE (China) Ltd.
227 Songbei Road
Suzhou Industrial Park
Suzhou City 215126
Jiangsu Province
P.R. China
Phone +86 512 8666 8180
Fax +86 512 8666 8210
welcome@cn.emsgrivory.com

EMS-CHEMIE (Suzhou) Ltd.
227 Songbei Road
Suzhou Industrial Park
Suzhou City 215126
Jiangsu Province
P.R. China
Phone +86 512 8666 8181
Fax +86 512 8666 8183
welcome@cn.emsgrivory.com

Taiwan

EMS-CHEMIE (Taiwan) Ltd.
36, Kwang Fu South Road
Hsin Chu Industrial Park
Fu Kou Hsiang
Hsin Chu Hsien 30351
Taiwan, R.O.C.
Phone +886 3 598 5335
Fax +886 3 598 5345
welcome@tw.emsgrivory.com

Korea

EMS-CHEMIE (Korea) Ltd.
#817 Doosan Venturedigm,
415 Heungan Daero,
Dongan-gu, Anyang-si,
Gyeonggi-do, 14059
Republic of Korea
Phone +82 31 478 3159
Fax +82 31 478 3157
welcome@kr.emsgrivory.com

Japan

EMS-CHEMIE (Japan) Ltd.
EMS Building
2-11-20 Higashi-koujiya
Ota-ku, Tokyo 144-0033
Japan
Phone +81 3 5735 0611
Fax +81 3 5735 0614
welcome@jp.emsgrivory.com

EMS-GRIVORY America

United States of America

EMS-CHEMIE (North America) Inc.
2060 Corporate Way
P.O. Box 1717
Sumter, SC 29151
USA
Phone +1 803 481 91 73
Fax +1 803 481 61 21
welcome@us.emsgrivory.com