

Grilon TS V0

PA666

EMS-GRIVORY | a unit of EMS-CHEMIE AG

Product Texts

Product designation according to ISO 1874:

PA 66+PA 6, MFHR, 14-040 N

Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	3600 / 1600	MPa	ISO 527-1/-2
Yield stress	85 / 50	MPa	ISO 527-1/-2
Yield strain	4 / 15	%	ISO 527-1/-2
Nominal strain at break	10 / >50	%	ISO 527-1/-2
Stress at break	75 / 50	MPa	ISO 527-1/-2
Charpy impact strength (+23°C)	75 / 100	kJ/m ²	ISO 179/1eU
Charpy impact strength (-30°C)	70 / -	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	4 / 15	kJ/m ²	ISO 179/1eA
Charpy notched impact strength (-30°C)	3 / 3	kJ/m ²	ISO 179/1eA

Thermal properties	dry / cond	Unit	Test Standard
Melting temperature (10°C/min)	260 / -	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	70 / -	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	210 / -	°C	ISO 75-1/-2
Coeff. of linear therm. expansion (parallel)	70 / -	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion (normal)	90 / -	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm nom. thickn.	V-0 / -	class	IEC 60695-11-10
Thickness tested	1.5 / -	mm	IEC 60695-11-10
Burning Behav. at thickness h	V-0 / -	class	IEC 60695-11-10
Thickness tested	0.4 / -	mm	IEC 60695-11-10
Oxygen index	35 / -	%	ISO 4589-1/-2
Max. usage temperature (long term)	100 - 120	°C	ISO 2578
Max. usage temperature (short term)	200	°C	EMS

Electrical properties	dry / cond	Unit	Test Standard
Relative permittivity (100Hz)	3 / 8	-	IEC 60250
Relative permittivity (1MHz)	3 / 4	-	IEC 60250
Dissipation factor (100Hz)	50 / 1500	E-4	IEC 60250
Dissipation factor (1MHz)	150 / 700	E-4	IEC 60250
Volume resistivity	1E11 / 1E9	Ohm*m	IEC 60093
Surface resistivity	- / 1E10	Ohm	IEC 60093
Electric strength	28 / 26	kV/mm	IEC 60243-1
Comparative tracking index	- / 600	-	IEC 60112


Other properties	dry / cond	Unit	Test Standard
Water absorption	8 / -	%	Sim. to ISO 62
Humidity absorption	2.5 / -	%	Sim. to ISO 62
Density	1160 / -	kg/m ³	ISO 1183

Rheo/Phys properties	dry / cond	Unit	Test Standard
Molding shrinkage (parallel)	0.7 / -	%	ISO 294-4, 2577
Molding shrinkage (normal)	0.8 / -	%	ISO 294-4, 2577


Diagrams




Viscosity-shear rate

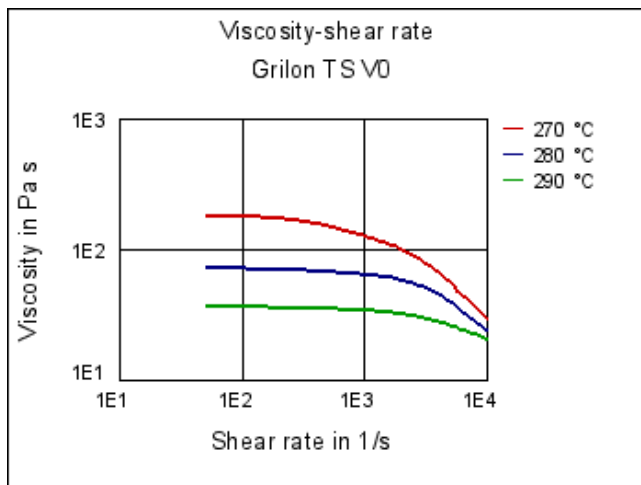


Shearstress-shear rate

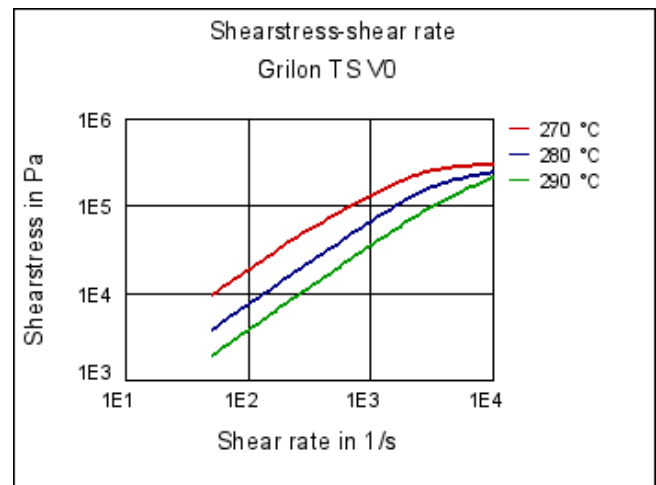


Dynamic Shear modulus-temperature

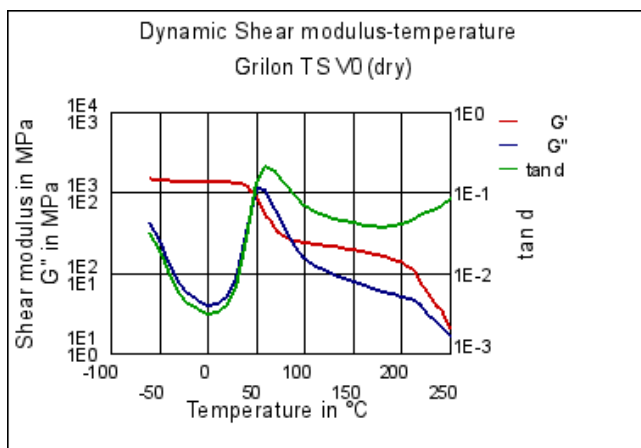


Dynamic Shear modulus-temperature

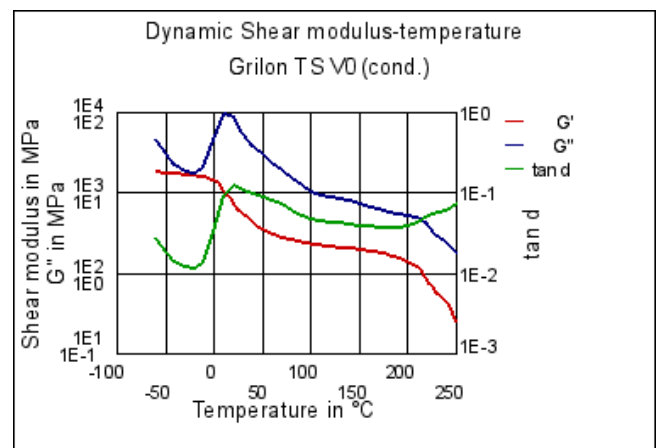


Stress-strain

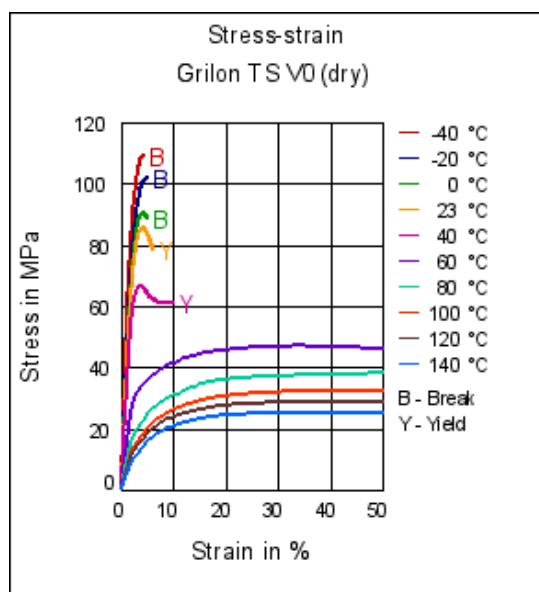


Stress-strain

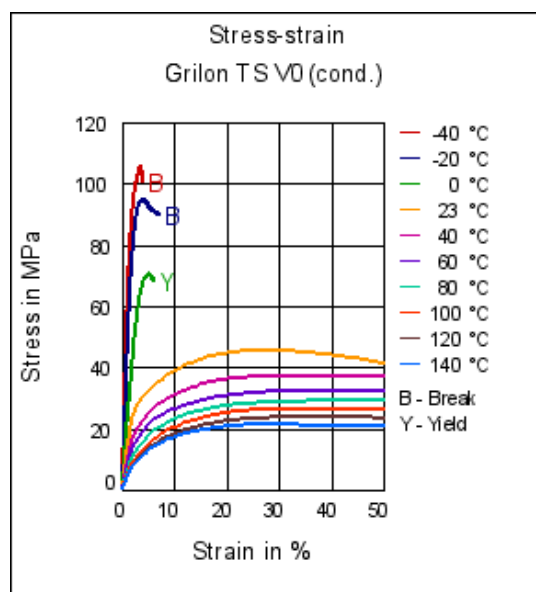


Secant modulus-strain

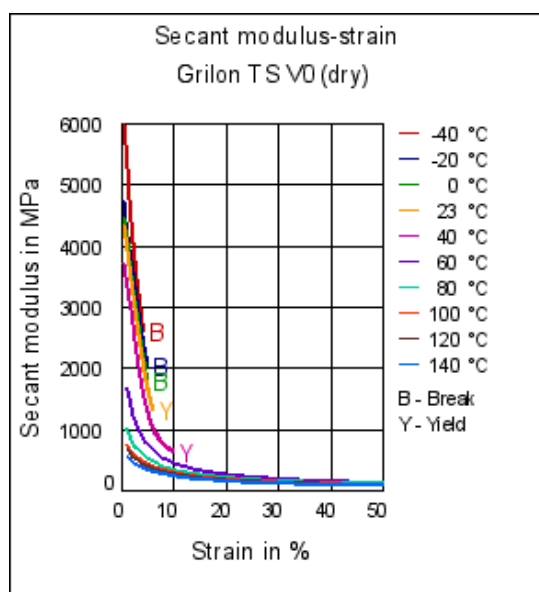


Secant modulus-strain

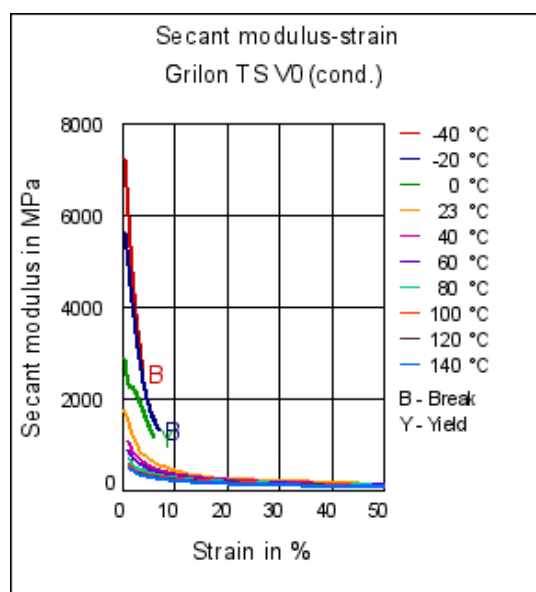


Stress-strain (isochronous) 23°C

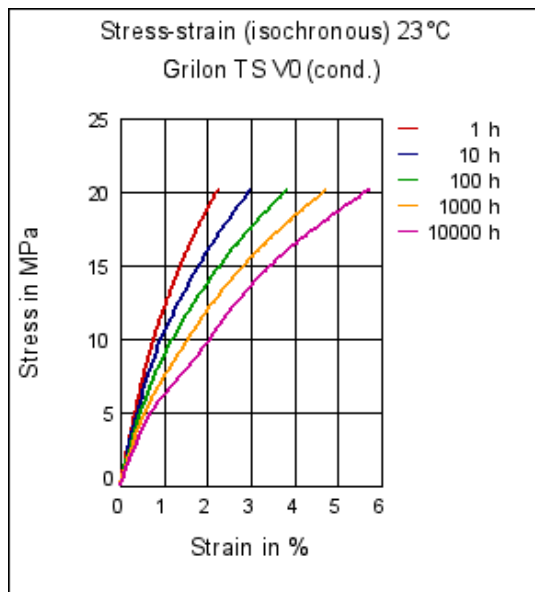


Creep curve °C

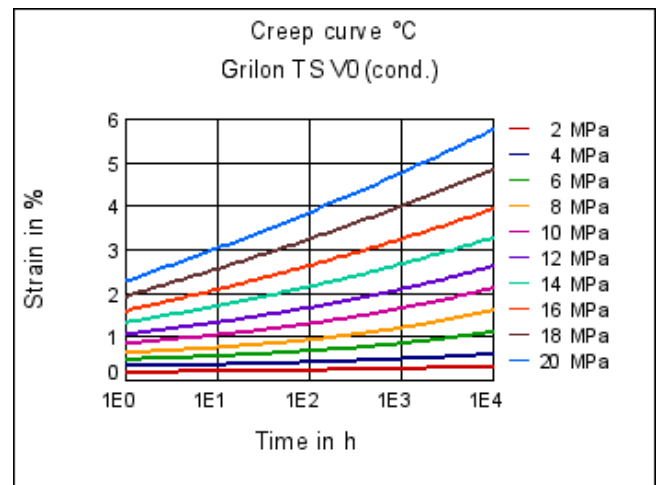


Creep curve °C

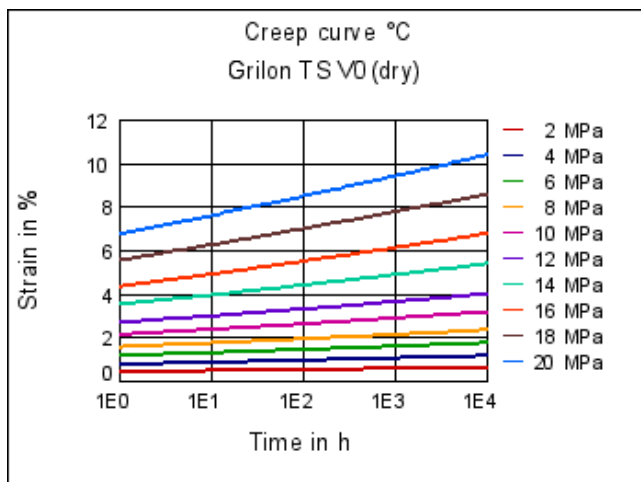


Creep modulus-time 23°C

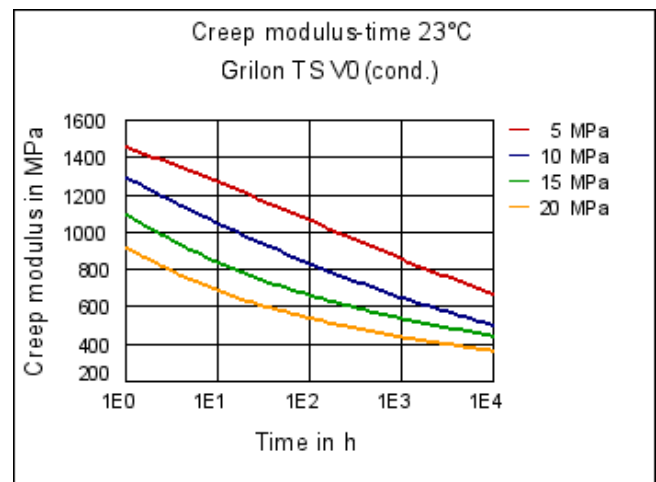


Stress-strain (isochronous) 80°C

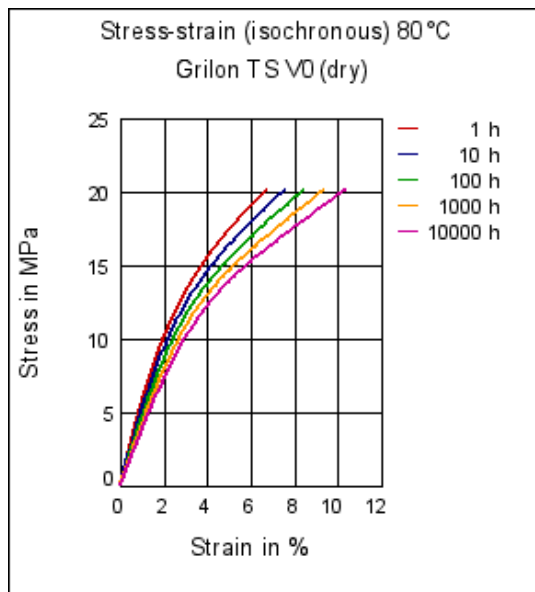


Creep modulus-time 80°C

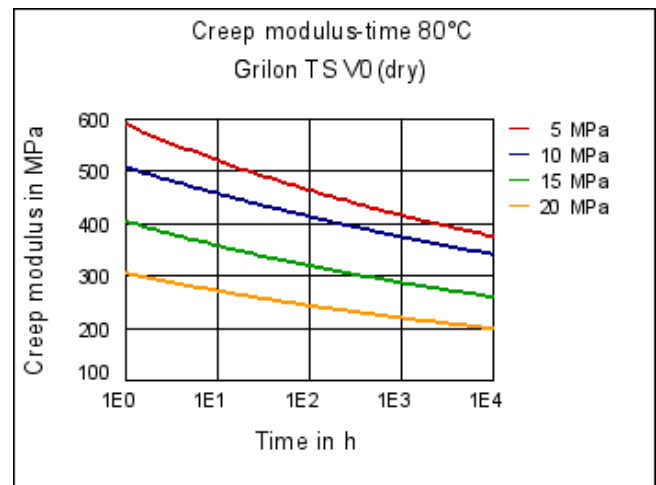

Specific volume-temperature (pvT)

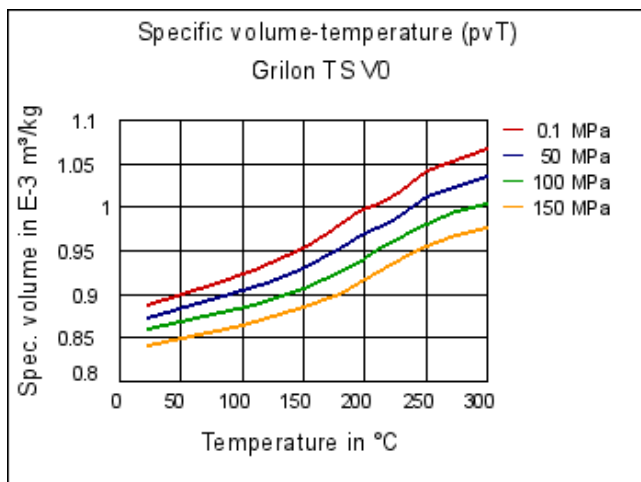

Tensile modulus-temperature

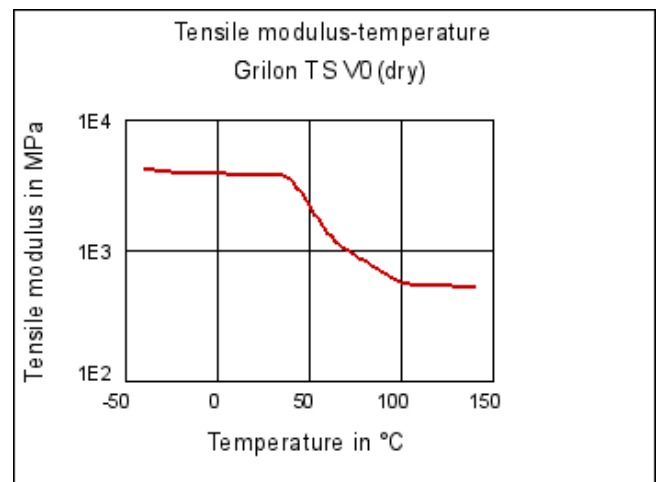

Characteristics

Processing

Injection Molding

Delivery form

Granules

Special Characteristics

Flame retardant

Regional Availability

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Automotive

Automotive electr. and electronics, lighting

Electricals & Electronics

Electrical appliances, Electrical equipment, Cables & Tubes, Connectors, Energy distribution, Lighting

Burning Behaviour

UL V0



Chemical Media Resistance

Acids

- ☺ Acetic Acid (5% by mass) (23°C)
- ☺ Citric Acid solution (10% by mass) (23°C)
- ☺ Lactic Acid (10% by mass) (23°C)
- ☹ Hydrochloric Acid (36% by mass) (23°C)
- ☹ Nitric Acid (40% by mass) (23°C)
- ☹ Sulfuric Acid (38% by mass) (23°C)
- ☹ Sulfuric Acid (5% by mass) (23°C)
- ☹ Chromic Acid solution (40% by mass) (23°C)

Bases

- ☺ Sodium Hydroxide solution (35% by mass) (23°C)
- ☺ Sodium Hydroxide solution (1% by mass) (23°C)
- ☺ Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- ☺ Isopropyl alcohol (23°C)
- ☺ Methanol (23°C)
- ☺ Ethanol (23°C)

Hydrocarbons

- ☺ n-Hexane (23°C)
- ☺ Toluene (23°C)
- ☺ iso-Octane (23°C)

Ketones

- ☺ Acetone (23°C)

Ethers

- ☺ Diethyl ether (23°C)

Mineral oils

- ☺ SAE 10W40 multigrade motor oil (23°C)
- ☺ SAE 10W40 multigrade motor oil (130°C)
- ☺ SAE 80/90 hypoid-gear oil (130°C)
- ☺ Insulating Oil (23°C)

Standard Fuels

- ☺ ISO 1817 Liquid 1 (60°C)
- ☺ ISO 1817 Liquid 2 (60°C)
- ☺ ISO 1817 Liquid 3 (60°C)
- ☺ ISO 1817 Liquid 4 (60°C)
- ☺ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ☺ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ☺ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ☺ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ☺ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)



Salt solutions

- ☺ Sodium Chloride solution (10% by mass) (23°C)
- ☹ Sodium Hypochlorite solution (10% by mass) (23°C)
- ☺ Sodium Carbonate solution (20% by mass) (23°C)
- ☺ Sodium Carbonate solution (2% by mass) (23°C)
- ☺ Zinc Chloride solution (50% by mass) (23°C)

Other

- ☺ Ethyl Acetate (23°C)
- ☹ Hydrogen peroxide (23°C)
- ☺ DOT No. 4 Brake fluid (130°C)
- ☺ Ethylene Glycol (50% by mass) in water (108°C)
- ☺ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ☺ 50% Oleic acid + 50% Olive Oil (23°C)
- ☺ Water (23°C)
- ☺ Deionized water (90°C)
- ☹ Phenol solution (5% by mass) (23°C)

