

Product Information

**VESTAMID® Care ML-GB30**

**MICROGLASS BEAD-FILLED (30%) PA12 RESIN FOR THE INJECTION MOULDING OF RIGID, LOW-WARPAGE AND DIMENSIONALLY ACCURATE MOULDINGS**



**Biocompatibility of VESTAMID® Care ME**

Biocompatibility was tested following ISO10993-1 recommendations for a surface medical device with up to 30 days body contact.

The material fulfills the requirements of USP<88> class VI.

Tests were performed by independent, certified laboratories.

**Biocompatibility tests for VESTAMID® Care:**

| Standard     | Description   |
|--------------|---|
| ASTM F756-08 | Hemocompatibility   |
| ISO 10993-5  | Cytotoxicity  |
| ISO 10993-10 | Sensitization: Maximization test according to Magnusson and Kligman   |
| ISO 10993-10 | Irritation: Intracutaneous Reactivity                                 |
| ISO 10993-11 | Acute Systemic Toxicity   |
| USP Class VI | Acute Systemic Toxicity Intracutaneous Reactivity Muscle Implantation |

**Key Features**

**Industrial Sector**

Sustainable, Industry and Engineering, Medical Devices

**Delivery form**

Pellets, Granules

**Sustainability**

Sustainable electricity

**Conformity**

Biocompatibility, Medical application

**Processing**  
Injection molding

**Additives**  
Glass beads / spheres

| LCA-values                                      | dry                                   | Unit                      | Test Standard    |
|---|---------------------------------------|---------------------------|------------------|
| LCA name of certificate                         | <a href="#">VESTAMID® L_GF medium</a> | -                         | ISO 14040, 14044 |
| LCA certifier                                   | <a href="#">TÜV Rheinland</a>         | -                         | ISO 14040, 14044 |
| Blue water consumption                          | <b>23.6</b>                           | kg                        | ISO 14040, 14044 |
| Global Warming Potential incl. bio. C incl. LUC | <b>5.1</b>                            | kg CO <sub>2</sub> eq./kg | ISO 14040, 14044 |
| Global Warming Potential excl. bio. C incl. LUC | <b>5.1</b>                            | kg CO <sub>2</sub> eq./kg | ISO 14040, 14044 |
| Land use (ReCiPe 2016)                          | <b>0.1</b>                            | Annual crop eq. y         | ISO 14040, 14044 |
| GWP savings as compared to 2023 reference       | <b>-2.3</b>                           | kg CO <sub>2</sub> eq./kg | ISO 14040, 14044 |

| Mechanical properties ISO                 | dry / cond             | Unit                 | Test Standard |
|---|------------------------|----------------------|---------------|
| Tensile modulus                           | <b>305000 / 261000</b> | psi                  | ISO 527       |
| Tensile strength                          | <b>6820 / -</b>        | psi                  | ISO 527       |
| Yield stress                              | <b>6820 / 5370</b>     | psi                  | ISO 527       |
| Yield strain                              | <b>5 / 5</b>           | %                    | ISO 527       |
| Stress at break                           | <b>5370 / *</b>        | psi                  | ISO 527       |
| Nominal strain at break, tB               | <b>20 / &gt;50</b>     | %                    | ISO 527       |
| Tensile creep modulus, 0,5% Strain, 1h    | <b>* / 232000</b>      | psi                  | ISO 899-1     |
| Tensile creep modulus, 0,5% Strain, 1000h | <b>* / 160000</b>      | psi                  | ISO 899-1     |
| Charpy impact strength, +23°C             | <b>76.1 / N</b>        | ftlb/in <sup>2</sup> | ISO 179/1eU   |
| Type of failure                           | <b>C / -</b>           | -                    | -             |
| Charpy impact strength, -30°C             | <b>76.1 / N</b>        | ftlb/in <sup>2</sup> | ISO 179/1eU   |
| Type of failure                           | <b>C / -</b>           | -                    | -             |
| Charpy notched impact strength, +23°C     | <b>2.09 / 2.85</b>     | ftlb/in <sup>2</sup> | ISO 179/1eA   |
| Type of failure                           | <b>C / C</b>           | -                    | -             |
| Charpy notched impact strength, -30°C     | <b>2.85 / 2.85</b>     | ftlb/in <sup>2</sup> | ISO 179/1eA   |

|                 |       |   |   |
|-----------------|-------|---|---|
| Type of failure | C / C | - | - |
|-----------------|-------|---|---|

| Thermal properties   | dry / cond  | Unit     | Test Standard  |
|--|-------------|----------|----------------|
| Melting temperature  | 352 / *     | °F       | ISO 11357-1/-3 |
| Temp. of deflection under load A, 1.80 MPa                 | 131 / *     | °F       | ISO 75-1/-2    |
| Temp. of deflection under load B, 0.45 MPa                 | 302 / *     | °F       | ISO 75-1/-2    |
| Vicat softening temperature B, 50 N, 50 K/h                | 311 / *     | °F       | ISO 306        |
| Coeff. of linear therm. expansion, 23°C to 55 °C, parallel | 7.22E-5 / * | in/in/°F | ISO 11359-1/-2 |
| Coeff. of linear therm. expansion, 23°C to 55 °C, normal   | 7.22E-5 / * | in/in/°F | ISO 11359-1/-2 |
| Melting Temperature  | 352         | °F       | ASTM D 3418    |

| Physical properties | dry / cond  | Unit              | Test Standard  |
|---------------------|-------------|-------------------|----------------|
| Density             | 1.25 / 1.26 | g/cm <sup>3</sup> | ISO 1183       |
| Water absorption    | 1.1 / *     | %                 | Sim. to ISO 62 |
| Humidity absorption | 0.5 / *     | %                 | Sim. to ISO 62 |
| Density             | 1.25        | g/cm <sup>3</sup> | ASTM D 792     |

| Burning Behav.                        | dry / cond | Unit  | Test Standard   |
|---------------------------------------|------------|-------|-----------------|
| Burning behav. at 1.5 mm nom. thickn. | HB / *     | class | IEC 60695-11-10 |
| Thickness tested                      | 0.0630 / * | in    | -               |
| Burnin behav. at thickness h          | HB / *     | class | IEC 60695-11-10 |
| Thickness tested                      | 0.1260 / * | in    | -               |

| Electrical properties        | dry / cond   | Unit  | Test Standard |
|------------------------------|--------------|-------|---------------|
| Volume resistivity, V        | >1E13 / 2E12 | Ohm*m | IEC 62631-3-1 |
| Surface resistivity, E       | * / 1E15     | Ohm   | IEC 62631-3-2 |
| Relative permittivity, 100Hz | 4.1 / 5      | -     | IEC 62631-2-1 |
| Relative permittivity, 1MHz  | 3.5 / 4      | -     | IEC 62631-2-1 |
| Dissipation factor, 100Hz    | 310 / 600    | E-4   | IEC 62631-2-1 |


|   |                  |       |                     |
|---|------------------|-------|---------------------|
| Dissipation factor, 1MHz                  | <b>230 / 370</b> | E-4   | IEC 62631-2-1       |
| Dielectric strength, AC, S20/S20, t. 1 mm | <b>- / 914</b>   | kV/in | IEC 60243-1         |
| Dielectric strength, AC, S20/P50          | <b>787 / -</b>   | V/mil | Sim. to IEC 60243-1 |
| CTI, test solution A, 50 drops value      | <b>600 / 600</b> | -     | IEC 60112           |
| Assessment of the insulation group        | <b>I</b>         | -     | DIN EN 60664-1      |

| <b>Rheological properties</b> | <b>dry / cond</b> | <b>Unit</b>            | <b>Test Standard</b> |
|-------------------------------|-------------------|------------------------|----------------------|
| Melt volume-flow rate, MVR    | <b>100 / *</b>    | cm <sup>3</sup> /10min | ISO 1133             |
| Temperature                   | <b>275 / *</b>    | °C                     | -                    |
| Load                          | <b>5 / *</b>      | kg                     | -                    |
| Molding shrinkage, parallel   | <b>0.6 / *</b>    | %                      | ISO 294-4, 2577      |
| Molding shrinkage, normal     | <b>0.7 / *</b>    | %                      | ISO 294-4, 2577      |
| Mold temperature              | <b>176 / *</b>    | °F                     | -                    |
| Melt temperature              | <b>482 / *</b>    | °F                     | -                    |


| <b>Test specimen production</b>       | <b>dry</b>   | <b>Unit</b> | <b>Test Standard</b> |
|---------------------------------------|--------------|-------------|----------------------|
| Injection Molding, melt temperature   | <b>482</b>   | °F          | ISO 294              |
| Injection Molding, mold temperature   | <b>176</b>   | °F          | ISO 294              |
| Injection Molding, injection velocity | <b>7.87</b>  | in/s        | ISO 294              |
| Injection Molding, pressure at hold   | <b>10200</b> | psi         | ISO 294              |

Diagrams


Viscosity-shear rate HKR

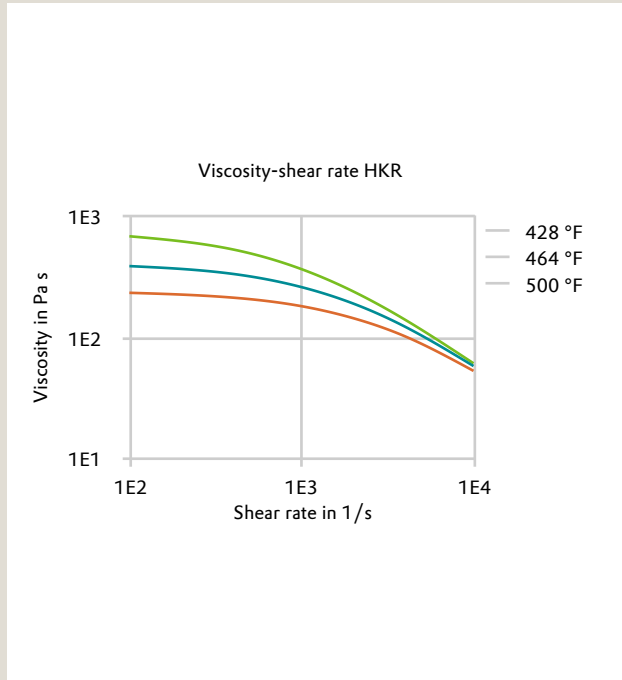


Shearstress-shear rate HKR

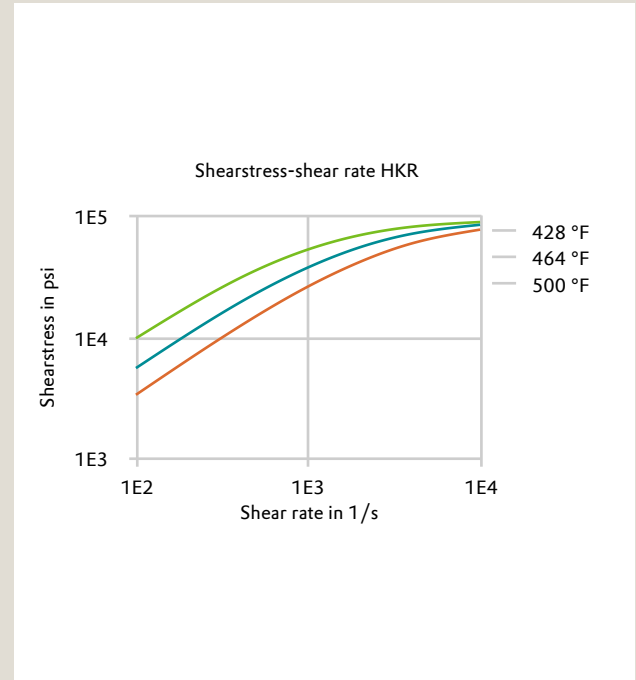


Stress-strain (isochronous) 73°F

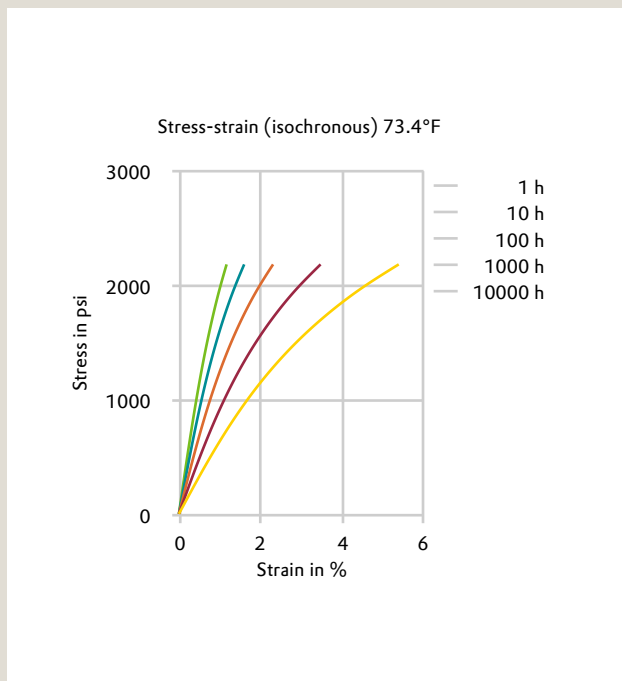


Creep modulus-time 73°F

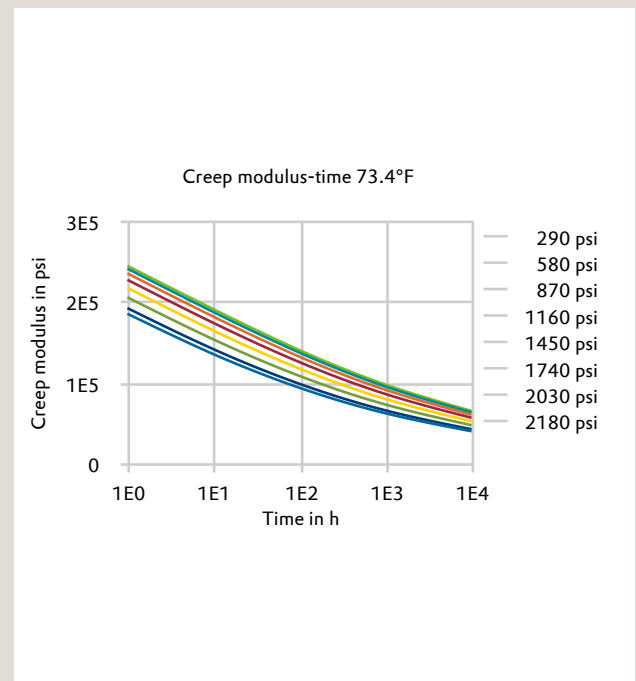


Stress-strain

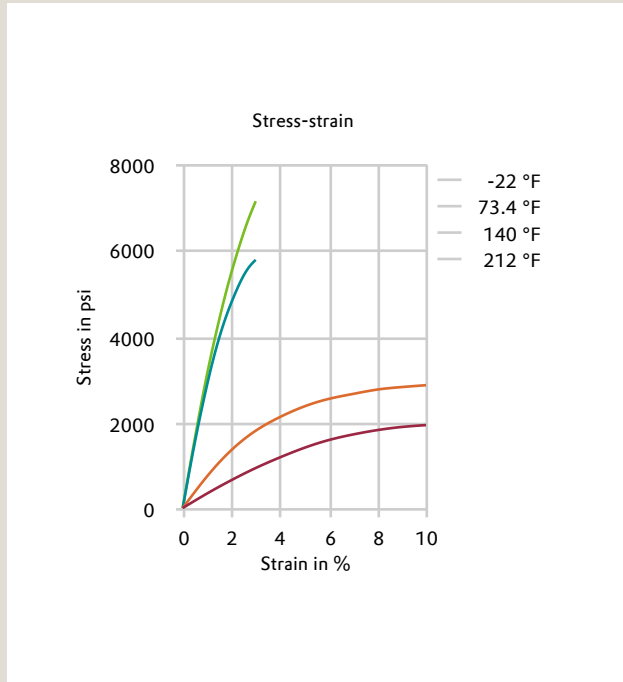

Secant modulus-strain

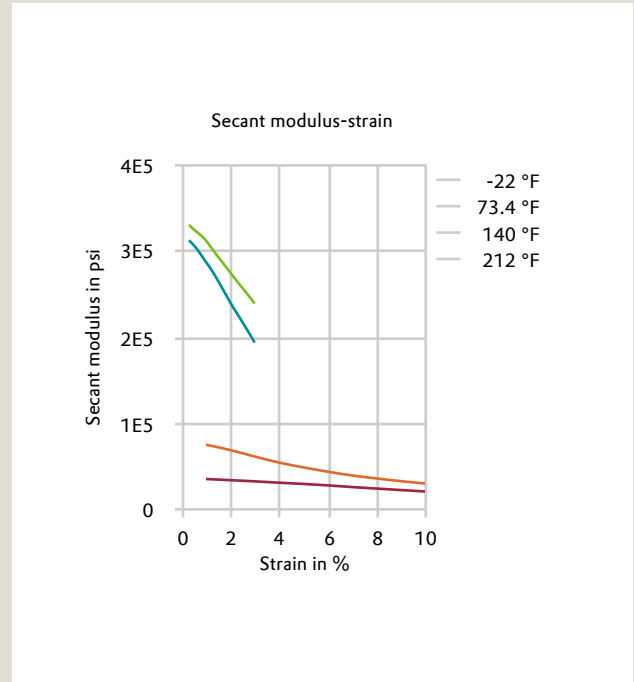

Dynamic Shear modulus-temperature

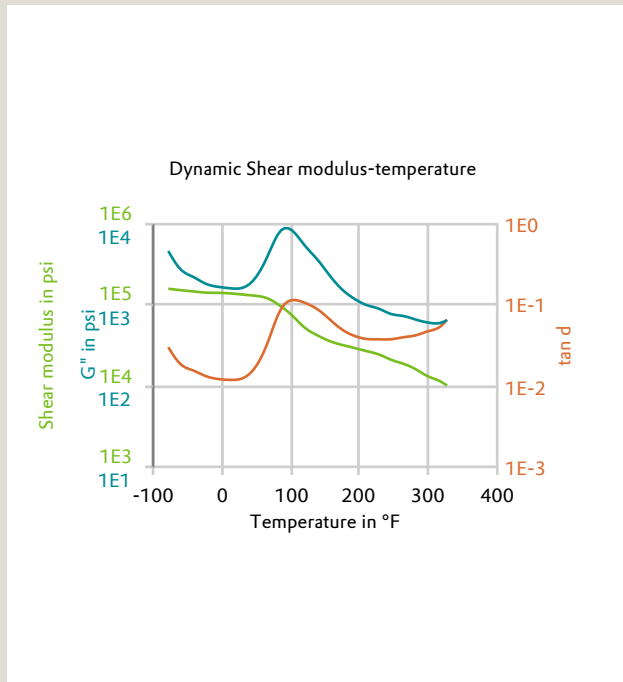

**Characteristics**

**Applications**

Encapsulation

**Regulatory**

US Pharmacopeia Class VI conformity

**Chemical Media Resistance**

**Acids**

- ✓ Acetic Acid (5% by mass) (23°C)
- ✓ Citric Acid solution (10% by mass) (23°C)

**Bases**

- ✓ Sodium Hydroxide solution (35% by mass) (23°C)
- ✓ Sodium Hydroxide solution (1% by mass) (23°C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23°C)

**Alcohols**

- ✓ Isopropyl alcohol (23°C)
- ✓ Methanol (23°C)
- ✓ Ethanol (23°C)

**Hydrocarbons**

- ✓ n-Hexane (23°C)
- ✓ Toluene (23°C)
- ✓ iso-Octane (23°C)

**Ketones**

- ✓ Acetone (23°C)

**Ethers**

- ✓ Diethyl ether (23°C)

**Mineral oils**

- ✓ SAE 10W40 multigrade motor oil (23°C)
- ✓ Insulating Oil (23°C)

**Standard Fuels**

- ✓ ISO 1817 Liquid 1 (60°C)
- ✓ ISO 1817 Liquid 2 (60°C)

- ✓ ISO 1817 Liquid 3 (60°C)
- ✓ ISO 1817 Liquid 4 (60°C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✓ Diesel EN 590 (100°C)

**Salt solutions**

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✓ Zinc Chloride solution (50% by mass) (23°C)

**Other**

- ✓ Ethyl Acetate (23°C)
- ✓ Hydrogen peroxide (23°C)
- ✓ DOT No. 4 Brake fluid (120°C)
- ✓ Water (23°C)

**Rheological calculation properties**

|                              | <b>dry</b>   | <b>Unit</b>                     | <b>Test Standard</b> |
|------------------------------|--------------|---------------------------------|----------------------|
| Density of melt              | <b>68</b>    | lb/ft <sup>3</sup>              | -                    |
| Thermal conductivity of melt | <b>1.94</b>  | BTU in/(hr ft <sup>2</sup> °F)- | -                    |
| Spec. heat capacity of melt  | <b>0.902</b> | BTU/(lb·F)                      | -                    |
| Ejection temperature         | <b>356</b>   | °F                              | -                    |
| Min. mold temperature        | <b>86</b>    | °F                              | -                    |
| Max. mold temperature        | <b>212</b>   | °F                              | -                    |
| Min. melt temperature        | <b>446</b>   | °F                              | -                    |
| Max. melt temperature        | <b>518</b>   | °F                              | -                    |