

Product Information

VESTAMID® L-GF30

GLASS FIBER-REINFORCED AND HEAT STABILIZED POLYAMIDE 12

VESTAMID® L-GF30 NC is a glass fiber –reinforced heat stabilized Polyamide 12 for injection molding. The material contains about 30% glass fibers, an ageing protective agent and a processing aid for a fast and even form filling. Due to the reinforcement moldings from this compound exhibit a higher strength and good heat resistance.

Further advantages of VESTAMID® L-GF30 NC are the characterizing properties of PA12, e.g., low water absorption, good dimensional stability and nearly constant mechanical properties at changing ambient humidity.

VESTAMID® L-GF30 NC is supplied as cylindrical granules, ready for processing, in moisture-proof bags.

The use of colorants may change property values.

Inside the original and undamaged packaging, the product has a shelf life of at least 2 years when stored in dry rooms at temperatures not exceeding 30°C.

Key Features

Industrial Sector

Automotive and Mobility, Sustainable, Industry and Engineering

Sustainability

Sustainable electricity

Processing

Injection molding

Delivery form

Pellets, Granules

Resistance to

Heat (thermal stability), Oil / fuels

Electrical

Insulating

Conformity

Automotive

Additives

Glass fibers, Lubricant

LCA-values	dry	Unit	Test Standard
LCA name of certificate	VESTAMID® L GF medium	-	ISO 14040, 14044
LCA certifier	TÜV Rheinland	-	ISO 14040, 14044
Blue water consumption	23.6	kg	ISO 14040, 14044
Global Warming Potential incl. bio. C incl. LUC	5.1	kg CO ₂ eq./kg	ISO 14040, 14044
Global Warming Potential excl. bio. C incl. LUC	5.1	kg CO ₂ eq./kg	ISO 14040, 14044
Land use (ReCiPe 2016)	0.1	Annual crop eq. y	ISO 14040, 14044
GWP savings as compared to 2023 reference	-2.3	kg CO ₂ eq./kg	ISO 14040, 14044

Mechanical properties ISO	dry / cond	Unit	Test Standard
Tensile modulus	986000 / 798000	psi	ISO 527
Tensile strength	17400 / -	psi	ISO 527
Yield stress	- / 16000	psi	ISO 527
Yield strain	- / 5	%	ISO 527
Stress at break	17100 / *	psi	ISO 527
Nominal strain at break, tB	6 / 5.5	%	ISO 527
Anisotropy ratio, tensile modulus	0.65 / -	-	-
Anisotropy ratio, tensile strength	0.55 / -	-	-
Charpy impact strength, +23°C	44.2 / 35.7	ftlb/in ²	ISO 179/1eU
Type of failure	C / C	-	-
Charpy impact strength, -30°C	47.6 / 45.2	ftlb/in ²	ISO 179/1eU
Type of failure	C / C	-	-
Charpy notched impact strength, +23°C	12.8 / 11.4	ftlb/in ²	ISO 179/1eA
Type of failure	P / C	-	-
Charpy notched impact strength, -30°C	9.99 / 10.5	ftlb/in ²	ISO 179/1eA
Type of failure	C / C	-	-
Flexural modulus, 23°C	856000 / -	psi	ISO 178

Flexural stress at conv. deflection, 23°C	24400 / -	psi	ISO 178
Flexural strength, 23°C	27300 / -	psi	ISO 178
Flexural strain at flexural strength, 23°C	6 / -	%	ISO 178
Flexural stress at break, 23°C	26400 / -	psi	ISO 178
Flexural strain at break, 23°C	6 / -	%	ISO 178
Taber Abrasion Resistance, S33, 2x 500g	< 15 / -	mg/100 cycles	DIN 53754

Thermal properties	dry / cond	Unit	Test Standard
Melting temperature	352 / *	°F	ISO 11357-1/-3
Glass transition temperature, DSC	108 / *	°F	ISO 11357-1/-2
Temp. of deflection under load A, 1.80 MPa	329 / *	°F	ISO 75-1/-2
Temp. of deflection under load B, 0.45 MPa	347 / *	°F	ISO 75-1/-2
Vicat softening temperature A, 10 N, 50 K/h	347 / *	°F	ISO 306
Vicat softening temperature B, 50 N, 50 K/h	347 / *	°F	ISO 306
Coeff. of linear therm. expansion, 23°C to 55 °C, parallel	3.33E-5 / *	in/in/°F	ISO 11359-1/-2
Melting Temperature	352	°F	ASTM D 3418

Physical properties	dry / cond	Unit	Test Standard
Density	1.24 / 1.24	g/cm ³	ISO 1183
Water absorption	1.1 / *	%	Sim. to ISO 62
Humidity absorption	0.5 / *	%	Sim. to ISO 62
Shore D hardness	79 / -	-	ISO 7619-1
Density	1.24	g/cm ³	ASTM D 792

Burning Behav.	dry / cond	Unit	Test Standard
UL Yellow Card available	yes / *	-	-
Burning behav. at 1.5 mm nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	0.0591 / *	in	-
Burnin behav. at thickness h	HB / *	class	IEC 60695-11-10

Thickness tested	0.1181 / *	in	-
Burning behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	0.0315 / *	in	-
Hot Wire Ignition (HWI)	3	PLC	IEC 60695-2-20
HWI - thickness tested	0.0319	in	-
Hot Wire Ignition (HWI)	2	PLC	IEC 60695-2-20
HWI - thickness tested	0.0591	in	-
Hot Wire Ignition (HWI)	1	PLC	IEC 60695-2-20
HWI - thickness tested	0.1181	in	-

Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity, V	>1E13 / 2E12	Ohm*m	IEC 62631-3-1
Surface resistivity, E	*/ >1E15	Ohm	IEC 62631-3-2
Relative permittivity, 100Hz	4.1 / 5	-	IEC 62631-2-1
Relative permittivity, 1MHz	3.4 / 4	-	IEC 62631-2-1
Dissipation factor, 100Hz	310 / 600	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	330 / 400	E-4	IEC 62631-2-1
Dielectric strength, AC, S20/S20, t. 1 mm	- / 1140	kV/in	IEC 60243-1
Dielectric strength, AC, S20/P50	1120 / -	V/mil	Sim. to IEC 60243-1
CTI, test solution A, 50 drops value	600 / 600	-	IEC 60112
Assessment of the insulation group	I	-	DIN EN 60664-1
CTI, Performance Level Categories, PLC	0	class	ASTM D 3638


Rheological properties	dry / cond	Unit	Test Standard
Melt volume-flow rate, MVR	30 / *	cm ³ /10min	ISO 1133
Temperature	275 / *	°C	-
Load	5 / *	kg	-
Melt volume-flow rate, MVR	33 / *	cm ³ /10min	ISO 1133

Temperature	446 / *	°F	-
Load	4.76 / *	lb	-
Molding shrinkage, parallel	0.1 / *	%	ISO 294-4, 2577
Molding shrinkage, normal	0.7 / *	%	ISO 294-4, 2577
Mold temperature	176 / *	°F	-
Melt temperature	482 / *	°F	-


Test specimen production	dry	Unit	Test Standard
Injection Molding, melt temperature	482	°F	ISO 294
Injection Molding, mold temperature	176	°F	ISO 294
Injection Molding, injection velocity	7.87	in/s	ISO 294
Injection Molding, pressure at hold	10200	psi	ISO 294

Diagrams


Viscosity-shear rate HKR

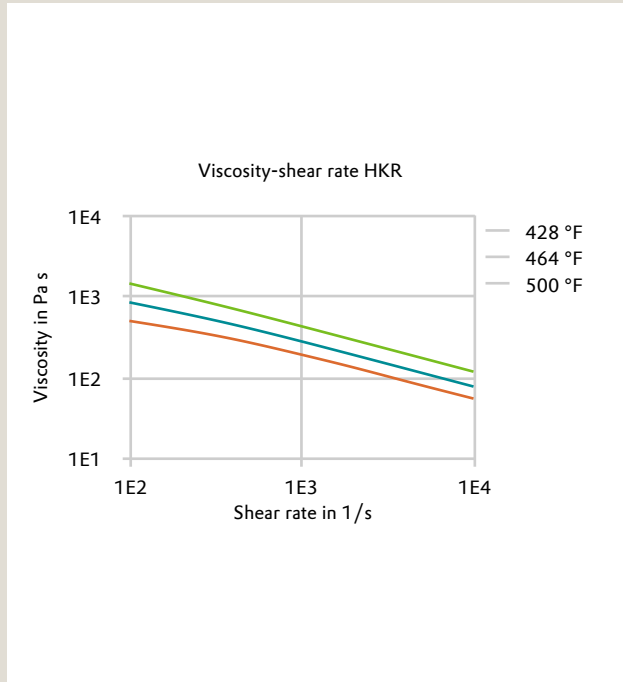


Shearstress-shear rate HKR

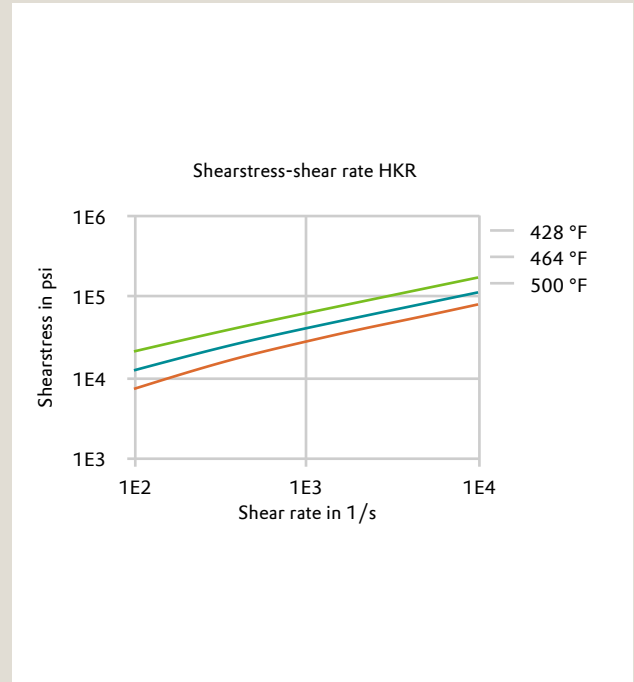


Stress-strain (isochronous) 73°F

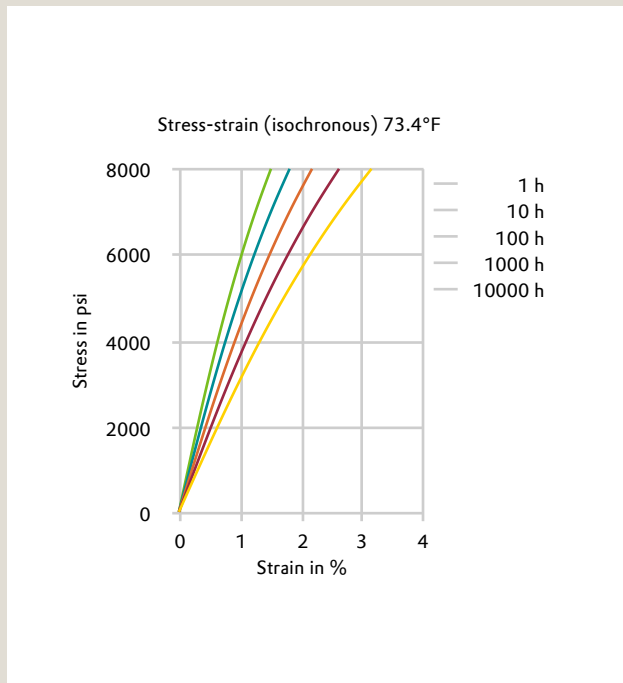


Creep modulus-time 73°F

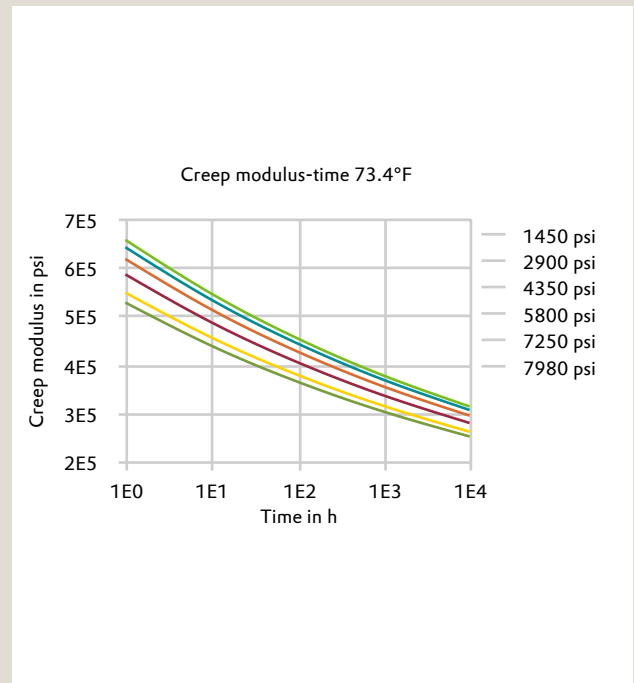


Tensile modulus-temperature

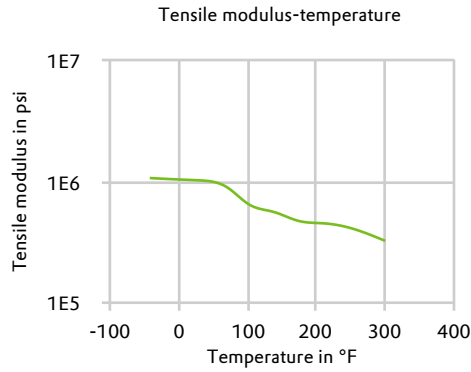


Stress-strain

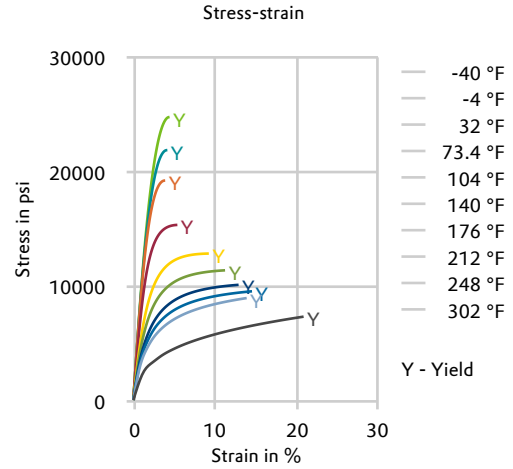


Secant modulus-strain

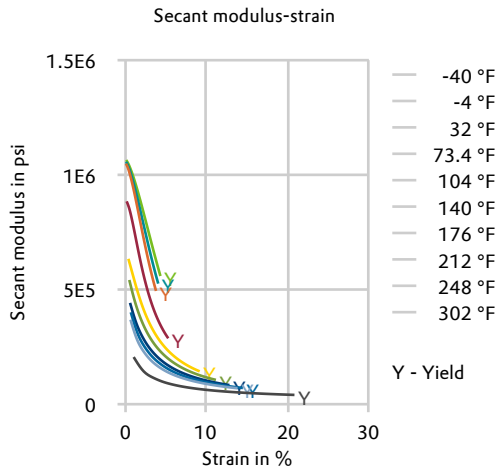

Stress-strain (anisotropy)

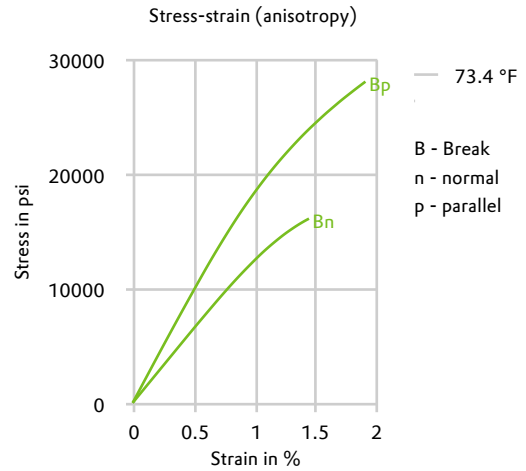

Dynamic Shear modulus-temperature

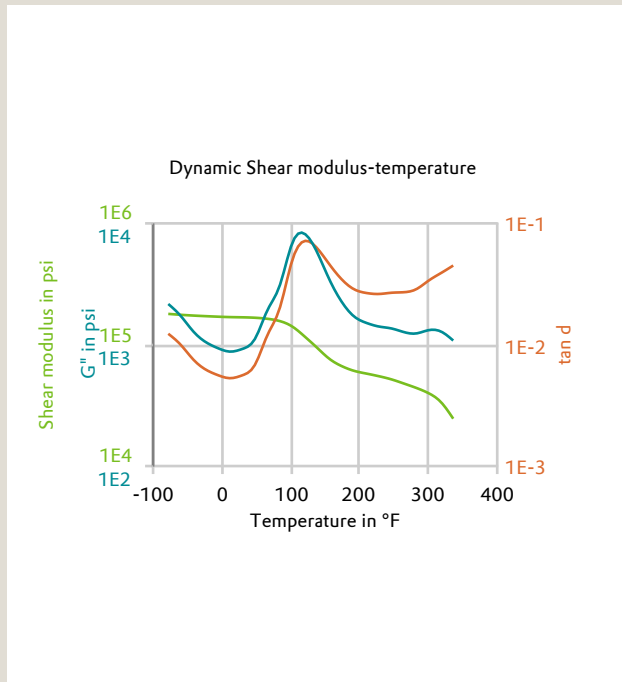

Characteristics

Special Characteristics

High heat resistant

Color

Natural color

Additives

Antioxidant agent, Heat stabilizer, Processing aids

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23°C)
- ✓ Citric Acid solution (10% by mass) (23°C)

Bases

- ✓ Sodium Hydroxide solution (35% by mass) (23°C)
- ✓ Sodium Hydroxide solution (1% by mass) (23°C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- ✓ Isopropyl alcohol (23°C)
- ✓ Methanol (23°C)
- ✓ Ethanol (23°C)

Hydrocarbons

- ✓ n-Hexane (23°C)
- ✓ Toluene (23°C)
- ✓ iso-Octane (23°C)

Ketones

- ✓ Acetone (23°C)

Ethers

- ✓ Diethyl ether (23°C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23°C)
- ✓ Insulating Oil (23°C)

Standard Fuels

- ✓ ISO 1817 Liquid 1 (60°C)
- ✓ ISO 1817 Liquid 2 (60°C)
- ✓ ISO 1817 Liquid 3 (60°C)
- ✓ ISO 1817 Liquid 4 (60°C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✓ Diesel EN 590 (100°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✓ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✓ Hydrogen peroxide (23°C)

- ✓ DOT No. 4 Brake fluid (120°C)
- ✓ Water (23°C)

Rheological calculation properties	dry	Unit	Test Standard
Density of melt	68	lb/ft ³	-
Thermal conductivity of melt	1.94	BTU in/(hr ft ² °F)-	-
Spec. heat capacity of melt	0.902	BTU/(lb-F)	-
Ejection temperature	356	°F	-
Min. mold temperature	86	°F	-
Max. mold temperature	212	°F	-
Min. melt temperature	464	°F	-
Max. melt temperature	536	°F	-