

Product Information

# VESTAMID® X7293 BK 9.7507

## HIGH VISCOSITY, PLASTICIZED, IMPACT MODIFIED, HEAT- AND LIGHT-STABILIZED POLYAMIDE 12 COMPOUND

**VESTAMID® X7293 BK 9.7507** is a plasticized polyamide 12 compound with heat and light stabilizer for the extrusion of flexible tubing and hose, especially for automotive applications according to DIN 73378, (PA 12-HIPHL, Type 1), ISO/DIN 7628-1 (PA 12-HIPEHL, Type 1) and SAE J844.

VESTAMID® X7293 BK 9.7507 is distinguished by an easy processing as well as by a high impact strength at low temperatures.

Properties of compounds based on Polyamide 12 vary little with changing humidity due to low moisture absorption. Parts made of this semicrystalline material are characterized by exceptional impact strength, low coefficient of friction and good chemical resistance.

VESTAMID® X7293 BK 9.7507 is supplied as cylindrical granules, ready for use, in moisture-proof bags.

Inside the original and undamaged packaging, the product has a shelf life of at least 2 years when stored in dry rooms at temperatures not exceeding 30°C.

### Key Features

#### Industrial Sector

Automotive and Mobility, Sustainable, Industry and Engineering

#### Sustainability

Sustainable electricity

#### Processing

Injection molding, Extrusion

#### Delivery form

Pellets, Granules

#### Resistance to

Heat (thermal stability), UV / light / weathering, Oil / fuels

#### Electrical

Insulating

#### Conformity

Automotive

#### Additives

Lubricant, Unfilled

LCA-values	dry	Unit	Test Standard
LCA name of certificate	<a href="#">VESTAMID® L Compound medium</a>	-	ISO 14040, 14044
LCA certifier	<a href="#">TÜV Rheinland</a>	-	ISO 14040, 14044
Blue water consumption	<b>25.6</b>	kg	ISO 14040, 14044
Global Warming Potential incl. bio. C incl. LUC	<b>6.0</b>	kg CO <sub>2</sub> eq./kg	ISO 14040, 14044
Global Warming Potential excl. bio. C incl. LUC	<b>6.0</b>	kg CO <sub>2</sub> eq./kg	ISO 14040, 14044
Land use (ReCiPe 2016)	<b>0.1</b>	Annual crop eq. y	ISO 14040, 14044
GWP savings as compared to 2023 reference	<b>-2.4</b>	kg CO <sub>2</sub> eq./kg	ISO 14040, 14044

Mechanical properties ISO	dry / cond	Unit	Test Standard
Tensile modulus	<b>59500 / 58000</b>	psi	ISO 527
Tensile strength	<b>3770 / 3480</b>	psi	ISO 527
Yield stress	<b>3770 / 3480</b>	psi	ISO 527
Yield strain	<b>32 / 32</b>	%	ISO 527
Stress at 50% strain	<b>3770 / 3480</b>	psi	ISO 527
Stress at break	<b>6090 / 5800</b>	psi	ISO 527
Nominal strain at break, tB	<b>240 / 250</b>	%	ISO 527
Charpy impact strength, +23°C	<b>N / N</b>	ftlb/in <sup>2</sup>	ISO 179/1eU
Charpy impact strength, 0°C	<b>N / N</b>	ftlb/in <sup>2</sup>	ISO 179/1eU
Charpy impact strength, -30°C	<b>N / N</b>	ftlb/in <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, +23°C	<b>57.1 / 59.5</b>	ftlb/in <sup>2</sup>	ISO 179/1eA
Type of failure	<b>P / P</b>	-	-
Charpy notched impact strength, -30°C	<b>3.33 / 2.85</b>	ftlb/in <sup>2</sup>	ISO 179/1eA
Type of failure	<b>C / C</b>	-	-
Flexural modulus, 23°C	<b>58000 / 56600</b>	psi	ISO 178
Flexural stress at conv. deflection, 23°C	<b>2030 / 1890</b>	psi	ISO 178
Flexural strength, 23°C	<b>3050 / 3050</b>	psi	ISO 178

Flexural strain at flexural strength, 23°C	9 / 9	%	ISO 178
Flexural stress at break, 23°C	N / N	psi	ISO 178
Flexural strain at break, 23°C	N / N	%	ISO 178

Thermal properties	dry / cond	Unit	Test Standard
Melting temperature	342 / *	°F	ISO 11357-1/-3
Glass transition temperature, DSC	55.4 / *	°F	ISO 11357-1/-2
Temp. of deflection under load A, 1.80 MPa	113 / *	°F	ISO 75-1/-2
Temp. of deflection under load B, 0.45 MPa	212 / *	°F	ISO 75-1/-2
Vicat softening temperature A, 10 N, 50 K/h	329 / *	°F	ISO 306
Vicat softening temperature B, 50 N, 50 K/h	266 / *	°F	ISO 306
Coeff. of linear therm. expansion, 23°C to 55 °C, parallel	0.0001 / *	in/in/°F	ISO 11359-1/-2
Coeff. of linear therm. expansion, 23°C to 55 °C, normal	0.0001 / *	in/in/°F	ISO 11359-1/-2
Melting Temperature	342	°F	ASTM D 3418

Physical properties	dry / cond	Unit	Test Standard
Density	1.02 / -	g/cm <sup>3</sup>	ISO 1183
Water absorption	1.3 / *	%	Sim. to ISO 62
Humidity absorption	0.5 / *	%	Sim. to ISO 62
Density	1.02	g/cm <sup>3</sup>	ASTM D 792

Burning Behav.	dry / cond	Unit	Test Standard
Burning behav. at 1.5 mm nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	0.0630 / *	in	-
Burnin behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	0.1260 / *	in	-

Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity, V	1E10 / 2.7E9	Ohm*m	IEC 62631-3-1


Surface resistivity, C, circular electrodes	- / <b>1.9E13</b>	Ohm/sq	IEC 62631-3-2
Relative permittivity, 50Hz	- / <b>13</b>	-	IEC 62631-2-1
Relative permittivity, 100Hz	<b>11 / 12</b>	-	IEC 62631-2-1
Relative permittivity, 1MHz	<b>4.6 / 3.7</b>	-	IEC 62631-2-1
Dissipation factor, 50Hz	- / <b>1550</b>	E-4	IEC 62631-2-1
Dissipation factor, 100Hz	<b>2000 / 1470</b>	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	<b>1900 / 1450</b>	E-4	IEC 62631-2-1
Dielectric strength, AC, S20/S20, t. 1 mm	- / <b>940</b>	kV/in	IEC 60243-1
Dielectric strength, AC, S20/P50	<b>762 / -</b>	V/mil	Sim. to IEC 60243-1
CTI, test solution A, 50 drops value	<b>600 / -</b>	-	IEC 60112
Assessment of the insulation group	<b>I</b>	-	DIN EN 60664-1

Rheological properties	dry / cond	Unit	Test Standard
Melt volume-flow rate, MVR	<b>53 / *</b>	cm <sup>3</sup> /10min	ISO 1133
Temperature	<b>275 / *</b>	°C	-
Load	<b>5 / *</b>	kg	-
Molding shrinkage, parallel	<b>0.9 / *</b>	%	ISO 294-4, 2577
Molding shrinkage, normal	<b>1.2 / *</b>	%	ISO 294-4, 2577
Mold temperature	<b>140 / *</b>	°F	-
Melt temperature	<b>428 / *</b>	°F	-


Test specimen production	dry	Unit	Test Standard
Injection Molding, melt temperature	<b>428</b>	°F	ISO 294
Injection Molding, mold temperature	<b>140</b>	°F	ISO 294
Injection Molding, injection velocity	<b>7.87</b>	in/s	ISO 294
Injection Molding, pressure at hold	<b>10200</b>	psi	ISO 294

Diagrams


Tensile modulus-temperature

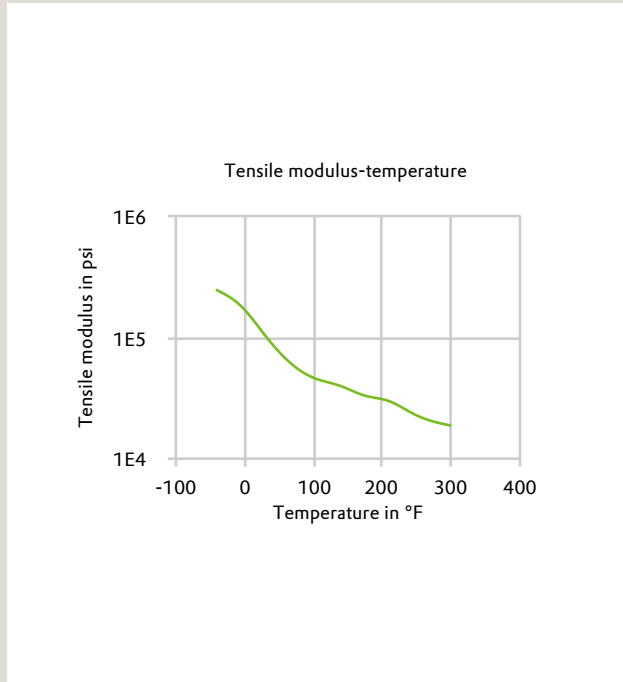

Stress-strain

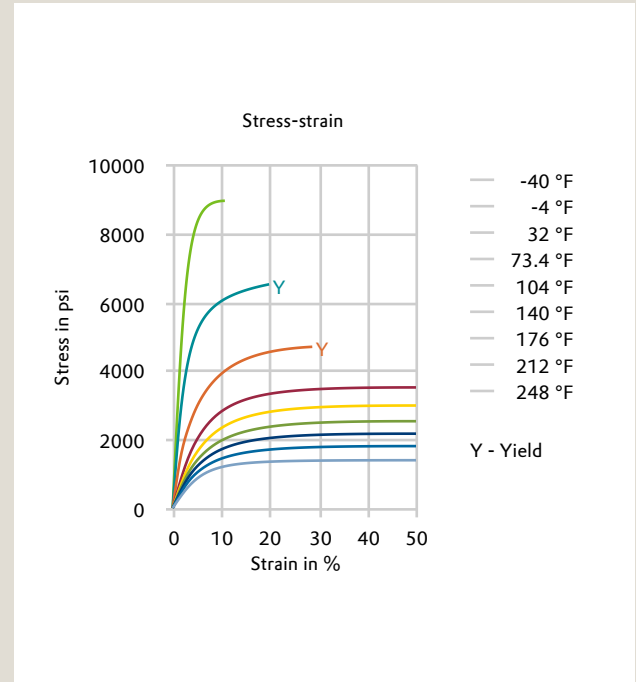

Secant modulus-strain

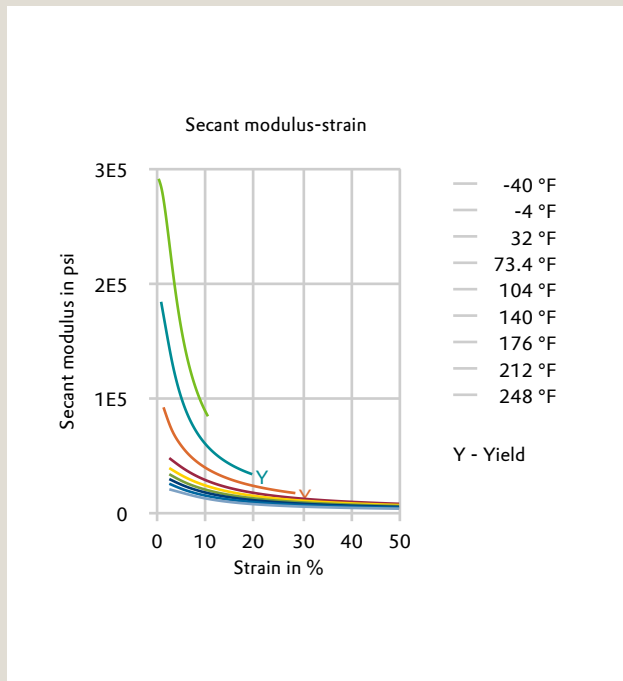

### Characteristics

#### Applications

Tube and hose

#### Processing

Profile extrusion, Pipe/Tube extrusion

#### Special Characteristics

High impact strength, Light-stabilized, High heat resistant

#### Features

Low coefficient of friction

#### Color

Black

#### Additives

Plasticizer, Impact resistant, Light stabilizer, Heat stabilizer

#### Chemical Resistance

General chemical resistance

### Chemical Media Resistance

#### Acids

- ✓ Acetic Acid (5% by mass) (23°C)
- ✓ Citric Acid solution (10% by mass) (23°C)

#### Bases

- ✓ Sodium Hydroxide solution (35% by mass) (23°C)
- ✓ Sodium Hydroxide solution (1% by mass) (23°C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23°C)

#### Alcohols

- ✓ Isopropyl alcohol (23°C)
- ✓ Methanol (23°C)
- ✓ Ethanol (23°C)

#### Hydrocarbons

- ✓ n-Hexane (23°C)
- ✓ Toluene (23°C)
- ✓ iso-Octane (23°C)

#### Ketones

- ✓ Acetone (23°C)

#### Ethers

- ✓ Diethyl ether (23°C)

#### Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23°C)

✓ Insulating Oil (23°C)

#### Standard Fuels

- ✓ ISO 1817 Liquid 1 (60°C)
- ✓ ISO 1817 Liquid 2 (60°C)
- ✓ ISO 1817 Liquid 3 (60°C)
- ✓ ISO 1817 Liquid 4 (60°C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✓ Diesel EN 590 (100°C)

#### Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✓ Zinc Chloride solution (50% by mass) (23°C)

#### Other

- ✓ Ethyl Acetate (23°C)
- ✓ Hydrogen peroxide (23°C)
- ✓ DOT No. 4 Brake fluid (120°C)
- ✓ Water (23°C)