

Product Information

VESTAMID® X7293 NC

HIGH VISCOSITY, PLASTICIZED, IMPACT MODIFIED, HEAT- AND LIGHT-STABILIZED POLYAMIDE 12 COMPOUND

VESTAMID® X7293 NC is a plasticized polyamide 12 compound with heat and light stabilizer for the extrusion of flexible tubing and hose, especially for automotive applications according to DIN 73378, (PA 12-HIPL, Type 1), ISO/DIN 7628-1 (PA 12-HIPEHL, Type 1) and SAE J844.

VESTAMID® X7293 NC is distinguished by an easy processing as well as by a high impact strength at low temperatures.

Properties of compounds based on PA 12 vary little with changing humidity due to low moisture absorption. Parts made of this semi-crystalline material are characterized by exceptional impact strength, low coefficient of friction and good chemical resistance.

VESTAMID® X7293 NC is supplied as cylindrical granules, ready for processing, in moisture-proof bags.

The use of colorants may affect property values.

Inside the original and undamaged packaging, the product has a shelf life of at least 2 years when stored in dry rooms at temperatures not exceeding 30°C.

The results shown have been generated from a low number of production lots. Therefore, they are preliminary and not yet the result of a statistical evaluation. Therefore they must not be used to establish specifications.

Key Features

Industrial Sector

Automotive and Mobility, Sustainable, Industry and Engineering

Sustainability

Sustainable electricity

Processing

Injection molding, Extrusion

Resistance to

Heat (thermal stability), UV / light / weathering, Oil / fuels

Electrical

Insulating

Conformity

Automotive

Delivery form
Pellets, Granules

Additives
Lubricant, Unfilled

| LCA-values | dry | Unit | Test Standard |
|---|---|---------------------------|------------------|
| LCA name of certificate | VESTAMID® L Compound medium | - | ISO 14040, 14044 |
| LCA certifier | TÜV Rheinland | - | ISO 14040, 14044 |
| Blue water consumption | 25.6 | kg | ISO 14040, 14044 |
| Global Warming Potential incl. bio. C incl. LUC | 6.0 | kg CO ₂ eq./kg | ISO 14040, 14044 |
| Global Warming Potential excl. bio. C incl. LUC | 6.0 | kg CO ₂ eq./kg | ISO 14040, 14044 |
| Land use (ReCiPe 2016) | 0.1 | Annual crop eq. y | ISO 14040, 14044 |
| GWP savings as compared to 2023 reference | -2.4 | kg CO ₂ eq./kg | ISO 14040, 14044 |

| Mechanical properties ISO | dry / cond | Unit | Test Standard |
|---------------------------------------|------------------|----------------------|---------------|
| Tensile modulus | 56600 / - | psi | ISO 527 |
| Tensile strength | 3630 / - | psi | ISO 527 |
| Yield stress | 3630 / - | psi | ISO 527 |
| Yield strain | 36 / - | % | ISO 527 |
| Stress at 50% strain | 3770 / - | psi | ISO 527 |
| Stress at break | 5950 / - | psi | ISO 527 |
| Nominal strain at break, tB | 235 / - | % | ISO 527 |
| Charpy impact strength, +23°C | N / - | ftlb/in ² | ISO 179/1eU |
| Charpy impact strength, 0°C | N / - | ftlb/in ² | ISO 179/1eU |
| Charpy impact strength, -20°C | N / - | ftlb/in ² | ISO 179/1eU |
| Charpy impact strength, -30°C | N / - | ftlb/in ² | ISO 179/1eU |
| Charpy notched impact strength, +23°C | 61.8 / - | ftlb/in ² | ISO 179/1eA |
| Type of failure | P / - | - | - |
| Charpy notched impact strength, -30°C | 3.33 / - | ftlb/in ² | ISO 179/1eA |
| Type of failure | C / - | - | - |

| | | | |
|--|------------------|-----|---------|
| Flexural modulus, 23°C | 58000 / - | psi | ISO 178 |
| Flexural stress at conv. deflection, 23°C | 2030 / - | psi | ISO 178 |
| Flexural strength, 23°C | 3190 / - | psi | ISO 178 |
| Flexural strain at flexural strength, 23°C | 9 / - | % | ISO 178 |
| Flexural stress at break, 23°C | N / - | psi | ISO 178 |
| Flexural strain at break, 23°C | N / - | % | ISO 178 |

| Thermal properties | dry / cond | Unit | Test Standard |
|--|-------------------|-------------|----------------------|
| Melting temperature | 342 / * | °F | ISO 11357-1/-3 |
| Glass transition temperature, DSC | 46.4 / * | °F | ISO 11357-1/-2 |
| Temp. of deflection under load A, 1.80 MPa | 113 / * | °F | ISO 75-1/-2 |
| Temp. of deflection under load B, 0.45 MPa | 212 / * | °F | ISO 75-1/-2 |
| Vicat softening temperature A, 10 N, 50 K/h | 333 / * | °F | ISO 306 |
| Vicat softening temperature B, 50 N, 50 K/h | 266 / * | °F | ISO 306 |
| Coeff. of linear therm. expansion, 23°C to 55 °C, parallel | 0.0001 / * | in/in/°F | ISO 11359-1/-2 |
| Coeff. of linear therm. expansion, 23°C to 55 °C, normal | 0.0001 / * | in/in/°F | ISO 11359-1/-2 |
| Melting Temperature | 342 | °F | ASTM D 3418 |

| Physical properties | dry / cond | Unit | Test Standard |
|----------------------------|-------------------|-------------------|----------------------|
| Density | 1.02 / - | g/cm ³ | ISO 1183 |
| Humidity absorption | 0.7 / * | % | Sim. to ISO 62 |
| Density | 1.02 | g/cm ³ | ASTM D 792 |

| Burning Behav. | dry / cond | Unit | Test Standard |
|---------------------------------------|-------------------|-------------|----------------------|
| Burning behav. at 1.5 mm nom. thickn. | HB / * | class | IEC 60695-11-10 |
| Thickness tested | 0.0630 / * | in | - |
| Burnin behav. at thickness h | HB / * | class | IEC 60695-11-10 |
| Thickness tested | 0.1260 / * | in | - |

| Electrical properties | dry / cond | Unit | Test Standard |
|--------------------------------------|------------|-------|---------------------|
| Volume resistivity, V | 1E10 / - | Ohm*m | IEC 62631-3-1 |
| Relative permittivity, 100Hz | 11 / - | - | IEC 62631-2-1 |
| Relative permittivity, 1MHz | 4.6 / - | - | IEC 62631-2-1 |
| Dissipation factor, 100Hz | 2000 / - | E-4 | IEC 62631-2-1 |
| Dissipation factor, 1MHz | 1900 / - | E-4 | IEC 62631-2-1 |
| Dielectric strength, AC, S20/P50 | 762 / - | V/mil | Sim. to IEC 60243-1 |
| CTI, test solution A, 50 drops value | 600 / - | - | IEC 60112 |
| Assessment of the insulation group | I | - | DIN EN 60664-1 |

| Rheological properties | dry / cond | Unit | Test Standard |
|-----------------------------|------------|------------------------|-----------------|
| Melt volume-flow rate, MVR | 26 / * | cm ³ /10min | ISO 1133 |
| Temperature | 220 / * | °C | - |
| Load | 10 / * | kg | - |
| Molding shrinkage, parallel | 0.7 / * | % | ISO 294-4, 2577 |
| Molding shrinkage, normal | 1.4 / * | % | ISO 294-4, 2577 |
| Mold temperature | 140 / * | °F | - |
| Melt temperature | 464 / * | °F | - |

| Pipes Properties | dry / cond | Unit | Test Standard |
|---|------------------|------|-----------------------|
| Cold impact resistance, breaks of 10, -40°C, 454g | 0 / * | - | SAE J844 |
| Tube dimension, OD x WT | 6 x 1 | mm | SAE J844 |
| Pretreatment | 2h boiling water | - | SAE J844 |
| Cold impact resistance, breaks of 10, -40°C, 454g | 0 / * | - | SAE J844 |
| Tube dimension, OD x WT | 6 x 1 | mm | SAE J844 |
| Pretreatment | 24h 110°C | - | SAE J844 |
| Burst hoop stress, 23°C, H2O | 3550 / * | psi | DIN 53758, historical |
| Burst hoop stress, 100°C, in Oil | 1520 / * | psi | DIN 53758, historical |

Properties of 3D printed parts acc. ISO

Charpy impact strength flat X, -20°C

dry / cond

N / -

Unit

ftlb/in²

Test Standard

ISO 179/1eU

Test specimen production

Injection Molding, melt temperature

dry

428

Unit

°F

Test Standard

ISO 294

Injection Molding, mold temperature

140

°F

ISO 294

Injection Molding, injection velocity

7.87

in/s

ISO 294

Injection Molding, pressure at hold


10200

psi


ISO 294

Diagrams

Rheology (oscillation) - viscosity

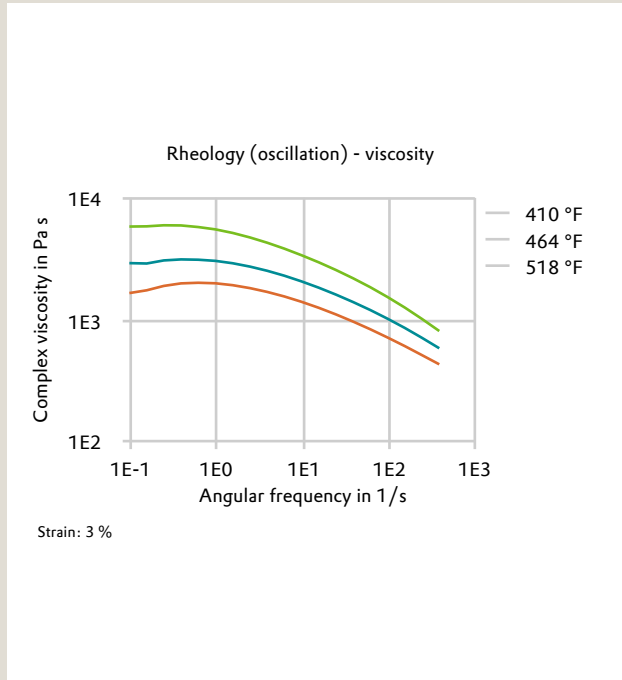

Rheology (oscillation) - storage modulus G' - loss modulus G''

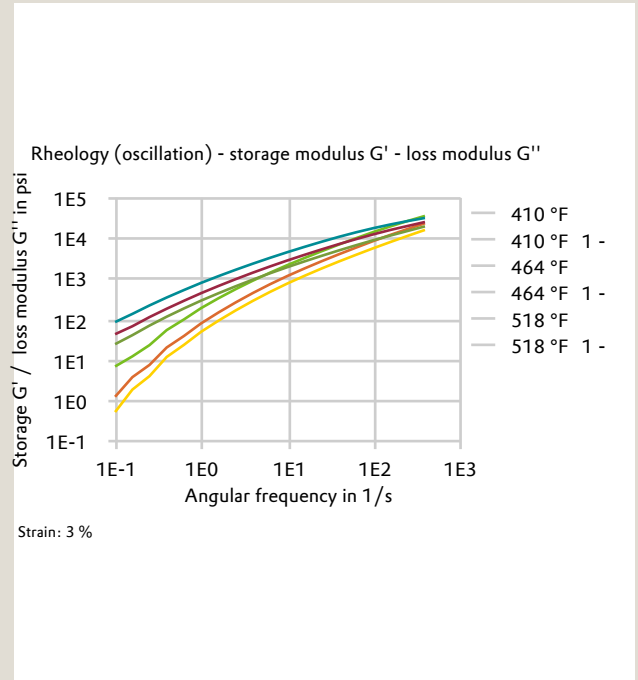

Characteristics

Applications

Tube and hose

Processing

Profile extrusion, Pipe/Tube extrusion

Special Characteristics

High impact strength, Light-stabilized, High heat resistant

Features

Low coefficient of friction

Color

Natural color

Additives

Plasticizer, Impact resistant, Light stabilizer, Heat stabilizer

Chemical Resistance

General chemical resistance

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23°C)
- ✓ Citric Acid solution (10% by mass) (23°C)

Bases

- ✓ Sodium Hydroxide solution (35% by mass) (23°C)
- ✓ Sodium Hydroxide solution (1% by mass) (23°C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- ✓ Isopropyl alcohol (23°C)
- ✓ Methanol (23°C)
- ✓ Ethanol (23°C)

Hydrocarbons

- ✓ n-Hexane (23°C)
- ✓ Toluene (23°C)
- ✓ iso-Octane (23°C)

Ketones

- ✓ Acetone (23°C)

Ethers

- ✓ Diethyl ether (23°C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23°C)
- ✓ Insulating Oil (23°C)

Standard Fuels

- ✓ ISO 1817 Liquid 1 (60°C)
- ✓ ISO 1817 Liquid 2 (60°C)
- ✓ ISO 1817 Liquid 3 (60°C)
- ✓ ISO 1817 Liquid 4 (60°C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✓ Diesel EN 590 (100°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)

✓ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✓ Hydrogen peroxide (23°C)
- ✓ DOT No. 4 Brake fluid (120°C)
- ✓ Water (23°C)

| Rheological calculation properties | dry | Unit | Test Standard |
|---|------------|-------------|----------------------|
| Min. mold temperature | 86 | °F | - |
| Max. mold temperature | 212 | °F | - |
| Min. melt temperature | 392 | °F | - |
| Max. melt temperature | 464 | °F | - |