

Technyl® B 218L V30 BLACK 44 N

PA666-GF30

Solvay Engineering Plastics

Product Texts

Copolyamide 6.6/6, 30 % glass fibre reinforced, heat stabilised
 excellent UV stabilised

Mechanical properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	9600 / 5900	MPa	ISO 527-1/-2
Stress at break	185 / -	MPa	ISO 527-1/-2
Strain at break	3 / -	%	ISO 527-1/-2
Charpy impact strength (+23°C)	80 / -	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	11 / -	kJ/m ²	ISO 179/1eA


Thermal properties	dry / cond	Unit	Test Standard
ISO Data			
Melting temperature (10°C/min)	242 / *	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	230 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	235 / *	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	26 / *	E-6/K	ISO 11359-1/-2
Burning behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	1.6 / *	mm	IEC 60695-11-10

Electrical properties	dry / cond	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	4 / 9.5	-	IEC 60250
Relative permittivity, 1MHz	3.7 / 4	-	IEC 60250
Dissipation factor, 100Hz	100 / 1500	E-4	IEC 60250
Dissipation factor, 1MHz	100 / -	E-4	IEC 60250
Volume resistivity	1E13 / 1E11	Ohm*m	IEC 60093
Electric strength	35 / 34	kV/mm	IEC 60243-1
Comparative tracking index	325 / -	-	IEC 60112

Other properties	dry / cond	Unit	Test Standard
ISO Data			
Water absorption	7 / *	%	Sim. to ISO 62
Humidity absorption	0.95 / *	%	Sim. to ISO 62
Density	1370 / -	kg/m ³	ISO 1183

Diagrams

Stress-strain

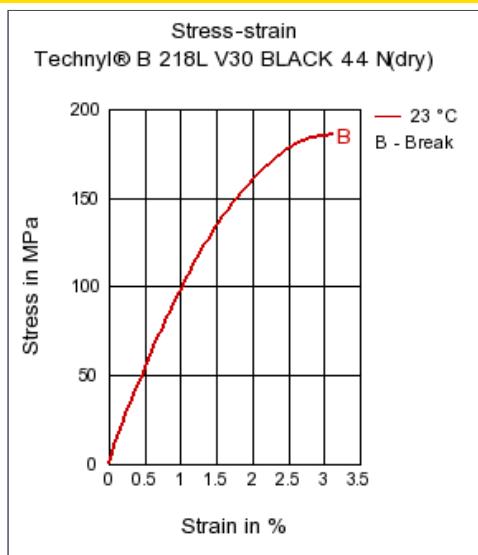

Characteristics

Processing

Injection Molding

Special Characteristics

Heat stabilized or stable to heat

Other text information

Injection Molding

PROCESSING

Melt temperature: 250°C

Mold temperature: 80°C

Chemical Media Resistance

Acids

- Acetic Acid (5% by mass) (23°C)
- Citric Acid solution (10% by mass) (23°C)
- Lactic Acid (10% by mass) (23°C)
- Hydrochloric Acid (36% by mass) (23°C)
- Nitric Acid (40% by mass) (23°C)
- Sulfuric Acid (38% by mass) (23°C)
- Sulfuric Acid (5% by mass) (23°C)
- Chromic Acid solution (40% by mass) (23°C)

Bases

- Sodium Hydroxide solution (35% by mass) (23°C)
- Sodium Hydroxide solution (1% by mass) (23°C)
- Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- Isopropyl alcohol (23°C)
- Methanol (23°C)
- Ethanol (23°C)

Hydrocarbons

- n-Hexane (23°C)
- Toluene (23°C)
- iso-Octane (23°C)

Technyl® B 218L V30 BLACK 44 N

PA666-GF30

Solvay Engineering Plastics

Ketones

 Acetone (23°C)

Ethers

 Diethyl ether (23°C)

Mineral oils

 SAE 10W40 multigrade motor oil (23°C)

Standard Fuels

 Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)

Salt solutions

 Zinc Chloride solution (50% by mass) (23°C)

Other

 Ethylene Glycol (50% by mass) in water (108°C)

 50% Oleic acid + 50% Olive Oil (23°C)

 Water (23°C)

 Deionized water (90°C)